

**ATHLON**  
RIDICULOUSLY GOOD OPTICS



**2021**  
PRODUCT CATALOG

BINOCULARS


RIFLESCOPES

SPOTTING SCOPES

RANGEFINDERS

RED DOTS

ACCESSORIES

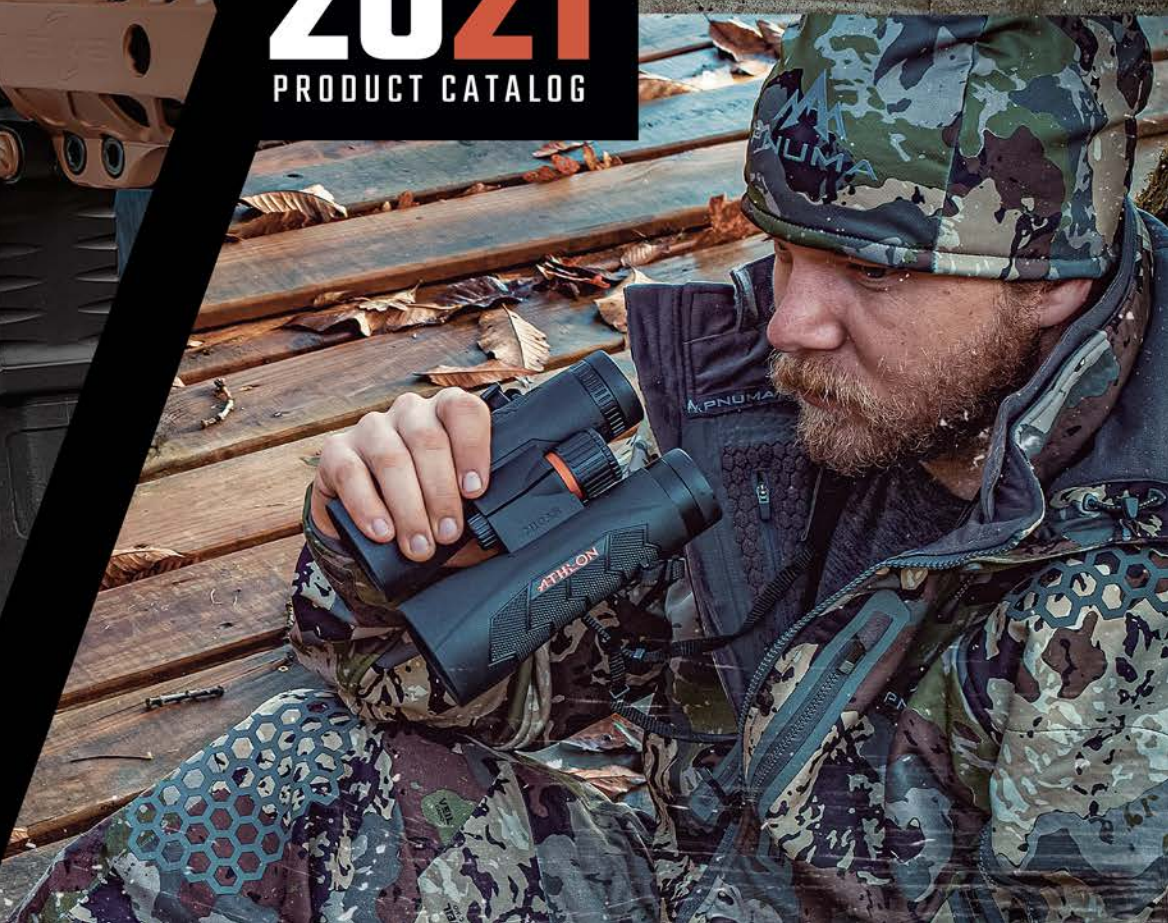



## CONTENT

### 6 BINOCULARS

- 6 CRONUS G2 UHD
- 9 CRONUS UHD RANGEFINDING BINOCULARS
- 10 MIDAS G2 UHD
- 13 ARGOS G2 UHD / HD
- 14 NEOS G2 HD

### 16 RIFLESCOPES

- 17 CRONUS BTR GEN2 UHD
- 18 ARES ETR UHD
- 23 ARES BTR GEN2 HD
- 24 MIDAS TAC HD
- 27 MIDAS HMR HD
- 28 MIDAS BTR GEN2 HD

- 31 HELOS BTR GEN2
- 36 ARGOS BTR GEN2
- 41 ARGOS HMR
- 42 TALOS BTR
- 45 TALOS
- 46 NEOS

### 48 SPOTTING SCOPES

- 49 CRONUS TACTICAL UHD
- 50 CRONUS UHD
- 53 ARES G2 UHD
- 56 ARGOS HD
- 58 TALOS

### 60 RED DOTS

- 61 RED DOT SIGHTS

- 62 PRISM SCOPES
- 65 MAGNIFIERS

### 66 LASER RANGEFINDERS

- 66 TALOS 800Y
- 69 MIDAS 1 MILE

### 70 RIFLESCOPES

- 70 QUICK COMPARISON

### 72 RETICLE SUBTENSIONS

### 85 ACCESSORIES

## KEY FEATURES



Extra-Low Dispersion Glass



HD Glass



E2ES System



ESP Dielectric Coating



XPL Coating



Phase Corrected Prisms



BaK4 Prisms



Advanced Fully Multi-Coated



Fully Multi-Coated



Apochromatic Lens System



Precision Zero Stop System



Locking Turrets



Argon Purged



Nitrogen Purged



Silver Coated K9 Prism



Rubber Armor



Long Eye Relief



Magnesium Chassis



Motion Sensor



Waterproof



## YOUR PRIZE IN OPTICS

ATHLON is a proud US sports optics product company devoted to designing and delivering superior quality optics products and outdoor accessories at a competitive price to our consumers via our distribution and retail channels. Athlon has strong engineering design capabilities, strategic alliances with quality manufacturers, and a streamlined fully integrated supply chain. These advantages enable us to bring the latest cutting edge technologies and cut out the extra layers of the traditional supply chain. With these advantages we are able to deliver goods and products to individual consumers' hands with great cost savings.

Our obsession with product quality and superior customer service for hunters, recreational shooters, and outdoor enthusiasts drives our business. The business model on which we founded Athlon allows us to deliver high quality optics at extremely competitive prices. Our goal from day one is to pass those savings to you, the outdoor enthusiast.

## LIFETIME WARRANTY

Your Athlon product is warranted to be free of defects in materials and workmanship for the lifetime of the product. Athlon will also repair or replace the product at no charge to you if you damage it through normal use. No receipt needed, no registration required. Athlon Optics is committed to providing the best product you can buy for your money. This warranty does not cover damages caused by deliberate damage, misuse, theft, or maintenance provided by someone other than the Athlon Authorized Service Department.



## NEW PRODUCTS

### RIFLESCOPES



HELOS BTR GEN2 1-10x28 SFP



CRONUS BTR GEN2 UHD 4.5-29x56 FFP



HELOS BTR GEN2 2-12x42 FFP



ARES ETR UHD 1-10x28 FFP



HELOS BTR GEN2 4-20x50 FFP



ARES ETR UHD 3-18x50 FFP



HELOS BTR GEN2 6-24x56 FFP

### SPOTTING SCOPES



ARES G2 UHD - ANGLE - 20-60x85 UHD



ARES G2 UHD - STRAIGHT - 20-60x85 UHD

### RANGEFINDERS



MIDAS 1 MILE

### EYEPIECES



28X EYEPIECE  
ARES G2 UHD

### RED DOTS



MIDAS LE



MIDAS TSP1



ARMOR SCOPE RINGS

### SCOPE MOUNTS



ARMOR CANTILEVER



# CRONUS G2 UHD

## BINOCULARS

Designed for serious glassing with exceptional edge to edge clarity, sharp detail enhancement, ultra-clear brightness and true color representation. We designed these binoculars with our revolutionary E2ES lens system which gives you a flat field of view. We included UHD glass resulting in a clearer and sharper image. Dielectric coating reflects 99% of the light through the prism assembly. Our state of the art light weight Magnesium chassis helps lighten your load all the while maintaining ruggedness to withstand the scrapes & bumps of constant use. These Cronus binoculars can take a hit!



10 x 42 mm



15 x 56 mm

### PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
15x56 mm	56 mm	18.5 mm	4.5 °	235 ft	13.1 ft	59-74 mm	45.2 oz	8.7x6.2"
10x42 mm	42 mm	19.3 mm	6.5 °	338 ft	6.6 ft	56-73 mm	27.8 oz	6.3x5.1"

### PRODUCT FEATURES



Phase Coated, BaK4 Prisms, Advanced Fully Multi-Coated Lenses, Magnesium Chassis, Locking Diopter, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable





# CRONUS UHD

## RANGE FINDER BINOCULARS

With ranging capabilities from 5 to 1000 yards on a deer and out to 2600 yards on a reflective target, these range-finding binoculars are perfect for any hunting or long range situation. We designed these binoculars with our revolutionary E2ES lens system that gives you a flat field of view. We included UHD glass that results in clearer and sharper image as well as an illuminated ranging display.



10 x 50 mm

### PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
10x50 mm	50 mm	17.0 mm	6.2°	325 ft	9.8 ft	58-76 mm	38.0 oz	6.7x5.4"

### RANGE FINDING SPECIFICATION

RANGING REFLECTIVE	RANGING DEER	ACCURACY	POWER SUPPLY	DISPLAY
2600 Y	1000 Y	+/- 1 Y	CR2-3V	Red Illuminated OLED Display Screen

### PRODUCT FEATURES



Dual Units of Measurement (Y/M), Angle Compensation Mode, Argon Purged, Waterproof



# MIDAS G2 UHD

## BINOCULARS

Midas was known to have a golden touch. He must have laid his hands on these binoculars since they set the gold standard for this class of binoculars. The rugged benchmark for all-weather brightness and clarity, these Midas roof-prism binoculars are light and slim thanks to the magnesium chassis. Together with UHD glass lenses, Advanced Fully Multi-Coated optics, high-quality Bak-4 prisms with our ESP Dielectric coating plus phase coating, these Midas binoculars gather maximum light and produce brilliant color fidelity.



10 x 25 mm


10 x 42 mm / 8 x 42 mm

12 x 50 mm / 10 x 50 mm

### PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
12x50 mm	50 mm	15.0 mm	5.4°	281 ft	11.5 ft	59-74 mm	32 oz	6.7x5.4"
10x50 mm	50 mm	16.9 mm	6.5°	341 ft	9.8 ft	59-74 mm	32 oz	6.7x5.4"
10x42 mm	42 mm	15.2 mm	6.5°	341 ft	8.2 ft	57-74 mm	23.3 oz	5.7x5.2"
8x42 mm	42 mm	17.2 mm	8.1°	426 ft	6.5 ft	57-74 mm	23.3 oz	5.7x5.2"
10x25 mm	25 mm	15.5 mm	5.4°	285 ft	5.2 ft	56-74 mm	8.3 oz	4.3x4.1"

### PRODUCT FEATURES



Phase Coated, Magnesium Chassis, Bak-4 Glass Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable





## ARGOS G2 UHD / HD

BINOCULARS

The Argos G2 line features affordable options with HD or UHD glass, both with Advanced Fully Multi-Coated Optics for sharp contrast, true color and excellent light transmission. They also have Bak-4 prism glass with ESP Dielectric coating and phase correction for enhanced color fidelity and sharpness. All Argos G2 binoculars are Argon gas purged for waterproofing & non-fogging capabilities. The durable and ergonomic magnesium chassis takes weight off your neck but at the same time stands up to the demands of hunting in any conditions.



10 x 42 mm / 8 x 42 mm  
(UHD)



10 x 42 mm / 8 x 42 mm  
(HD)



12 x 50 mm / 10 x 50 mm  
(HD)

### PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
HD 12x50 mm	50 mm	16.0 mm	4.9°	257 ft	13 ft	56-76 mm	31.5 oz	6.8x5.6"
HD 10x50 mm	50 mm	17.0 mm	5.8°	304 ft	13 ft	56-76 mm	31.5 oz	6.8x5.6"
HD 10x42 mm	42 mm	16.1 mm	6.1°	319 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"
HD 8x42 mm	42 mm	17.3 mm	7.1°	371 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"
UHD 10x42 mm	42 mm	16.1 mm	6.1°	319 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"
UHD 8x42 mm	42 mm	17.3 mm	7.1°	371 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"

### PRODUCT FEATURES



Bak-4 Glass Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable

## NEOS HD

### BINOCULARS

We build optics to withstand the elements, no matter what class of bins they are in. We figure if you spend any time outdoors you will be near water, and your equipment might spend some time in it. The Neos G2 series of weatherproof binoculars are built tough, with a composite chassis that's O-ring sealed and nitrogen purged for 100% waterproof/fog-proofing. So, if you run into foul weather or take spill in a mountain stream, your Neos G2 bins are ready for it. Rubber armor gives you a grip in slippery situations. Fully Multi-coated optics and premium-quality BaK-4 prism glass maximize light transmission and image clarity.




10 x 42 mm / 8 x 42 mm

#### PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
10x42 mm	42 mm	14.1 mm	5.9°	309 ft	13.1 ft	56-72 mm	21 oz	5.9x4.9"
8x42 mm	42 mm	17 mm	7.0°	367 ft	13.1 ft	56-72 mm	21 oz	5.9x4.9"




#### PRODUCT FEATURES



Long Eye Relief, Close Focus, Twist Up Eye-Cups, Tripod Adaptable, Nitrogen Purged





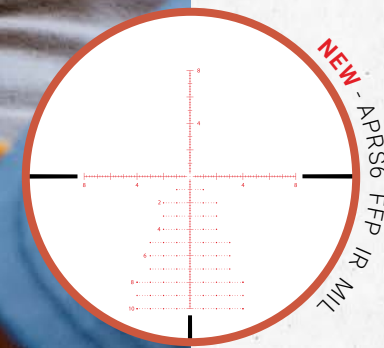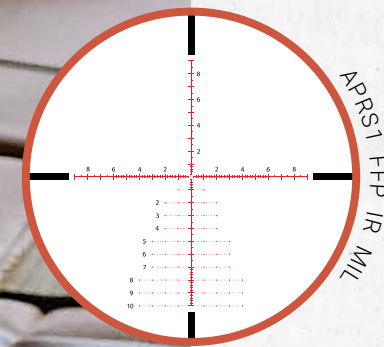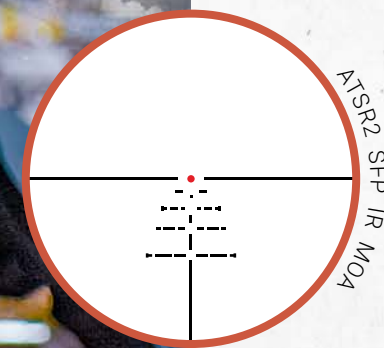

# CRONUS BTR GEN2 UHD

RIFLESCOPES

A titan in long range precision. Poor weather and low light conditions are no match for UHD extra-low dispersion lenses. Cut through mirage and leave the competition in the dust. From precision shooting to the most demanding hunt, the Cronus BTR GEN2 is up to the challenge. The next generation of the Cronus BTR is now equipped with our applauded internal stainless-steel component turret design producing sharp, loud, tactile clicks.

NEW



1-6x24 SFP

NEW



4.5-29x56 FFP

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-6x24 SFP	Exposed	30 mm	ATSR2 SFP IR MOA	Matte	3.6-4.0"	106.9-17.7 ft	18.8 oz	10.4"
4.5-29x56 FFP	Exposed	34 mm	APLR5 FFP IR MOA	Matte	3.6-3.8"	24.8-3.83 ft	35.8 oz	14.4"
			APRS6 FFP IR MIL					
			APRS1 FFP IR MIL					

## PRODUCT FEATURES

\* Locking Turrets on 1-6x24



\* Argon Purged, High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Glass Reticles, Exposed Turrets, Waterproof





# ARES ETR UHD

RIFLESCOPES

The latest in our growing line of Low-Power Variable Optics, this First Focal Plane LPVO is unmatched in versatility and quality. Whether hunting in thick brush, taking 600-yard shots over a bean field, or tearing up a 3-gun stage, the incredible field of view on 1x paired with the long-range capability of 10x is ready for any task. Take confidence with a precision zero stop and locking elevation turret/capped windage turret, ensuring you never lose zero.



**NEW**

1-10x24 FFP

## PRODUCT SPECIFICATION

\* Exposed - Elevation Turret / Capped - Windage Turret


POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-10x24 FFP	*Exposed/ Capped	34 mm	ATMR2 FFP IR MOA ATMR3 FFP IR MIL	Matte	3.7"	117.3- 11.7 ft	19.2 oz	10.0"

## PRODUCT FEATURES

\*\* Zero Stop and Locking - Elevation Turret



High Precision Erector System, Aircraft Grade Aluminum Tube, XPL Coating, Illuminated Glass Reticles, Exposed/Capped Turrets, Waterproof

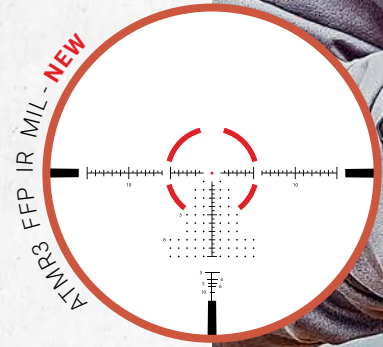

1X - ATMR3 FFP IR MIL



10X - ATMR3 FFP IR MIL



RIFLESCOPES

**NEW**

ARES ETR UHD

athlonoptics.com

RIFLESCOPES

**NEW**

ARES ETR UHD

athlonoptics.com

# ARES ETR UHD

## RIFLESCOPES

The Ares ETR First Focal Plane scope is loaded with features that will allow you to take your long range shooting to another level. Featuring a stainless steel turret system, the Ares ETR has the most tactile clicks and a true zero stop on the elevation turret to make sure your turrets and shots are right on every time. A locking feature is equipped on windage turret. Extra Low dispersion lenses allow for the sharpest and best color image possible. Constructed with an 34mm tube, this riflescope can withstand even the harshest of elements.

**NEW**

3-18x50 FFP



4.5-30x56 FFP



4.5-30x56 FFP

### PRODUCT SPECIFICATION


POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
3-18x50 FFP	Exposed/ Locking	34 mm	APLR6 FFP IR MOA APRS6 FFP IR MIL	Matte	3.74"	39.2- 6.65 ft	34.5 oz	14.2"
4.5-30x56 FFP	Exposed/ Locking	34 mm	APLR2 FFP IR MOA APLR5 FFP IR MOA APRS1 FFP IR MIL APRS6 FFP IR MIL	Matte/ *Brown	3.9"	24.5- 3.75 ft	36.5 oz	15.3"

### PRODUCT FEATURES

\* Locking Feature on Windage only



\* High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, XPL Coating, Illuminated Glass Reticles, Exposed Turrets, Waterproof





NEW - APLR4 FFP IR MOA



NEW - APRS5 FFP IR MIL

# ARES BTR GEN2 HD

RIFLESCOPES

Built off the success of the 1st generation Ares BTR, the GEN2 is still a top-tier riflescope, without the price tag. The Ares BTR GEN2 acquires a new stainless steel turret design, just like the Midas TAC and Ares ETR lines. The new turret design features sharper, more tactile clicks. Featuring HD glass, a new optical system provides an even brighter and clearer image throughout the magnification range. A one-piece, precision machined aircraft grade aluminum scope body, precision zero stop, and impeccable tracking will deliver precise, accurate results in any field.



2.5-15x50 FFP



4.5-27x50 FFP

### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
2.5-15x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA APRS5 FFP IR MIL	Matte	3.9"	41.8-6.8 ft	25.1 oz	13.8"
4.5-27x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA APRS5 FFP IR MIL	Matte	3.9"	22.7-3.8 ft	27.3 oz	13.8"

### PRODUCT FEATURES



High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Glass Reticles, Exposed Turrets, Waterproof



# MIDAS TAC HD

## RIFLESCOPES

Here at Athlon Optics we have listened to your feedback and suggestions and developed the Midas TAC. Loaded with features including HD Glass, Advanced Fully Multi-Coated lenses to enhance target appearance at all distances, a hard Zero Stop for repeatability and Capped Windage Turret to prevent accidental adjustments. This is not just another option, but the solution!



4-16x44 FFP



5-25x56 FFP



6-24x50 FFP

### PRODUCT SPECIFICATION



\* Exposed - Elevation Turret / Capped - Windage Turret

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
4-16x44 FFP	*Exposed/ Capped	30 mm	APRS2 FFP MIL	Matte	3.7"	27.7- 7 ft	23.8 oz	14.2"
5-25x56 FFP	*Exposed/ Capped	34 mm	APLR4 FFP IR MOA	Matte	3.7"	22.1- 4.5 ft	30.0 oz	15.1"
			APRS3 FFP IR MIL					
			APRS6 FFP MIL					
6-24x50 FFP	*Exposed/ Capped	30 mm	APLR4 FFP IR MOA	Matte	3.7"	17.8- 4.6 ft	26.3 oz	14.6"
			APRS2 FFP IR MIL					
			APRS3 FFP IR MIL					

### PRODUCT FEATURES



Aircraft Grade Aluminum, Side Parallax Adjustment, Non-Illuminated Glass Reticles, Waterproof

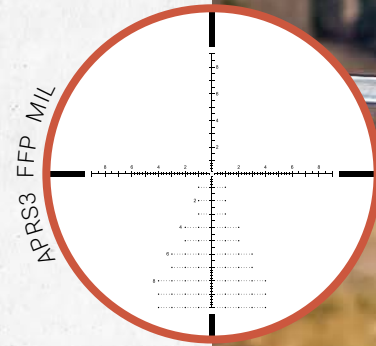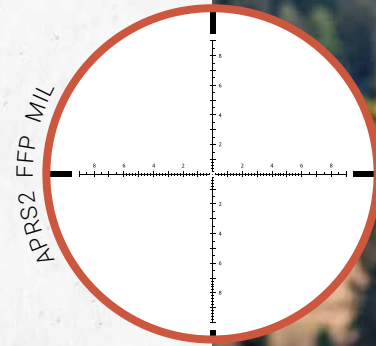



AHMR SFP IR MOA



BDC 600A

# MIDAS HMR HD

RIFLESCOPES

Attention all hunters, attention all hunters! We have great news for you! We would like to introduce the Midas HMR Second Focal Plane riflescope line made by hunters, for hunters.

Featuring HD glass and Advanced Fully Multi-Coated optics deliver crisp bright images for taking a shot, short or long. This one piece tube, precision-machined from aircraft grade aluminum will deliver precise, accurate results all day long. Both elevation and windage turrets are capped to make sure nothing gets bumped after you set your zero. You can always count on it to deliver the final punch.



2.5-15x50 SFP

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
2.5-15x50 SFP	Exposed	30 mm	AHMR SFP IR MOA BDC 600A	Matte	3.9"	41.8-6.8 ft	26 oz	13.8"

## PRODUCT FEATURES



Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Glass Reticles

# MIDAS BTR GEN2 HD

## RIFLESCOPES

This second focal plane variable power scope will be the perfect optic for you regardless of whether or not you are shooting small targets at a few hundred yards, shooting 3-gun matches, or hunting big game anywhere in the world, this will be the perfect option for you.

With new and improved tactile turrets, a true zero stop, and updated reticle designs; you won't find a better option on the market for any of your applications. HD glass equipped with our Advanced Fully Multi-Coated lenses so you'll have the brightest, clearest image possible in any situation. The innovative XPL coating protects your lenses from oil, dirt and smudges.



1-6x24 SFP



4.5-27x50 SFP



### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-6x24 SFP	Capped	30 mm	ATSR16 SFP IR MOA ATSR4 SFP IR MOA	Matte	3.8"	108-17.6 ft	18.1 oz	10.6"
4.5-27x50 SFP	Exposed	30 mm	AHMR SFP IR MOA APRS4 SFP IR MIL	Matte	3.9"	22.7-3.6 ft	26.0 oz	13.8"

### PRODUCT FEATURES




Aircraft Grade Aluminum Tube, High Precision Erector System, Side Parallax Adjustment, Illuminated Glass Reticles, Capped/Exposed Turrets, Waterproof

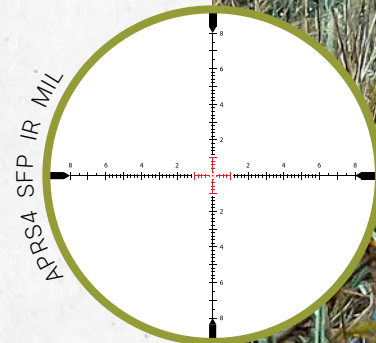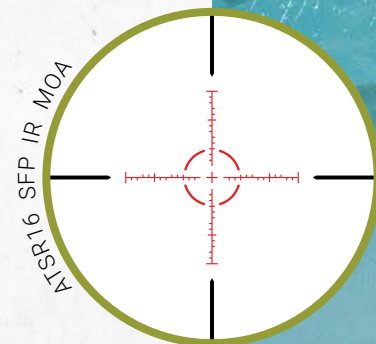


ATMR4 SFP IR MOA - 7X

ATMR4 SFP IR MOA - 70X

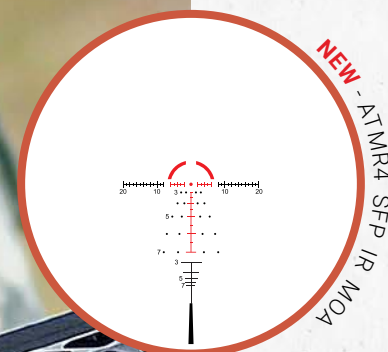

NEW - ATMR4 SFP IR MOA

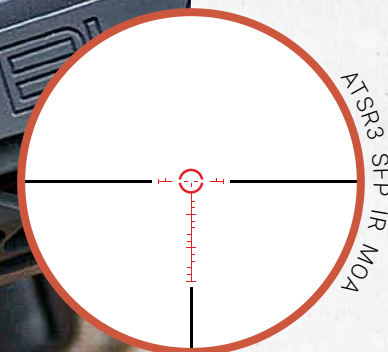

ATSR3 SFP IR MOA

# HELOS BTR / GEN2

RIFLESCOPES

The Helos BTR GEN2 1-10x28 is a second focal plane option for tactical shooters looking for the latest trend in optics at an affordable price. Accurately assess and engage silhouette-sized targets out to 700 yards using 68 or 69 gr .223/5.56 Nato cartridges with the ATMR4 SFP IR MOA reticle.

The Helos BTR 1-4.5x24 is specially designed for service rifle matches and AR platforms with short and mid-range applications in mind. A revolution locking feature limits the Up Adjustment of your elevation turret within one revolution from your zero position, while still providing total 23 MOA adjustment from zero, ideal for 600 targets. This feature eliminates any second-guessing which turn you are at on your elevation turret.



1-10x28 GEN2 SFP



1-4.5x24 SFP

## PRODUCT SPECIFICATION

POWER X	TURRET	TUBE	AVAILABLE	SURFACE	EYE	FOV		
OBJ. LENS	STYLE	SIZE	RETICLES	FINISH	RELIEF	@100	WEIGHT	LENGTH
						YARDS		
1-10x28 SFP	Capped	34 mm	ATMR4 SFP IR MOA	Matte	3.2"	110-10 ft	16.1 oz	10.3"
1-4.5x24 SFP	Exposed	30 mm	ATSR3 SFP IR MOA	Matte	3.2"	100-22 ft	22.9 oz	9.5"

## 1-10X28 PRODUCT FEATURES



Second Focal Plane, High Precision Erector System, 30mm Tubes, Illuminated Glass Reticles, Capped Turrets

## 1-4.5X24 PRODUCT FEATURES




Revolution Lock, Second Focal Plane, High Precision Erector System, 30mm Tubes, Illuminated Glass Reticles, Exposed Turrets, Side Parallax Adjustment



# HELOS BTR GEN2

RIFLESCOPES

All the attributes of an ideal designated marksman rifle scope, with features equally suitable for the modern hunter or an operators DMR. Ideal for anyone looking for solution to short range and mid-range applications, whether you dial or holdover. First Focal Plane MOA and MIL based reticles are always valid at any magnification. Robustly built with fool-proof turret features and a protective XPL lens coating, the Helos BTR GEN2 2-12x is ready to deploy in any field.

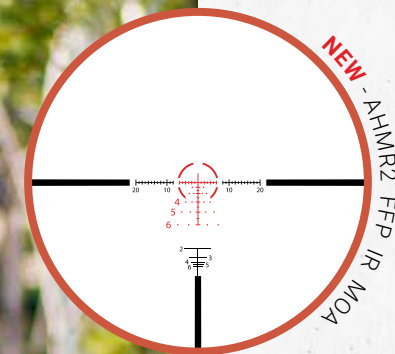

2-12x42 SFP

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
2-12x42 FFP	Exposed	30 mm	AHMR2 FFP IR MOA AHMR2 FFP IR MIL	Matte	3.6"	55.7-9.6 ft	22.6 oz	11.8"

## PRODUCT FEATURES



First Focal Plane, High Precision Erector System, Side Parallax Adjustment, 30 mm Tubes, Illuminated Glass Reticles, Exposed Turrets, Waterproof



NEW - APLR6 FFP IR MOA



NEW - APRS6 FFP IR MIL

## HELOS BTR GEN2

RIFLESCOPES

Affordable, solid, and reliable are seldom associated with long range shooting and hunting. The Helos BTR GEN2 is the exception. Advanced Fully Multi-Coated lenses and XPL coatings balance out this optic for a wide variety of conditions. Cross-over features such as Locking turrets are not just for hunting, they instill confidence in mid to long range shooters as well.



NEW

4-20x50 FFP



NEW

6-24x56 FFP

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
4-20x50 FFP	Exposed	30 mm	APLR6 FFP IR MOA	Matte	3.6"	27.9-5.6 ft	24.9 oz	13.3"
			APRS6 FFP IR MIL					
6-24x56 FFP	Exposed	34 mm	APLR6 FFP IR MOA	Matte	3.7"	19.9-5.12 ft	34.8 oz	14.3"
			APRS6 FFP IR MIL					

## PRODUCT FEATURES



First Focal Plane Reticle, High Precision Erector System, Side Parallax Adjustment, 30 mm Tubes, Illuminated Glass Reticles, Exposed Turrets, Waterproof




# ARGOS BTR GEN2

## RIFLESCOPES

Our entry into LPVOs, the Argos BTR GEN2 1-8x is a very versatile tool for multigunners, hunters, and those in the market for a self defense optic. Whether you are expecting close engagement with wild hogs, or burning up ammo at the local range, a reliable close-range scope with the ability to engage targets mid-range is something no one should be without. The ATSR5 reticle provides quick target acquisition at close range and holdovers out to 600 yards using 68 and 69 grain BTHP 223 Rem/5.56mm NATO rounds.



1-8x24 SFP

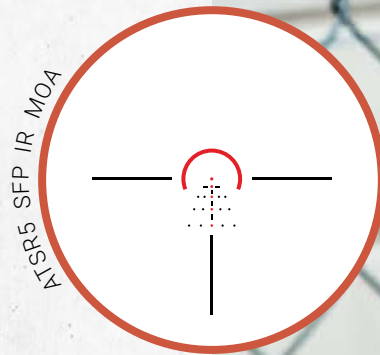

ATSR5 SFP IR MOA

### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-8x24 SFP	Capped	30 mm	ATSR5 SFP IR MOA	Matte	3.5"	110-14.5 ft	16.1 oz	9.8"

### PRODUCT FEATURES



Second Focal Plane Reticle, High Precision Erector System, Illuminated Glass Reticles, Waterproof



# ARGOS BTR GEN2

## RIFLESCOPES

A precision long range optic with features normally found on high-end riflescopes. The Argos BTR GEN2 is designed for precision shooting on a budget. Advanced Fully Multi-Coated Optics deliver a clear bright image in low-light environments. The GEN2 now features Athlon's Precision Zero Stop System, for a quick-hard stop when returning to zero. It also features turrets with sharper, more tactile clicks.



6-24x50 FFP



8-34x56 FFP



10-40x56 SFP


### PRODUCT SPECIFICATION


POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
6-24x50 FFP	Exposed	30 mm	APLR2 FFP IR MOA APMR FFP IR MIL	Matte	3.3"	16.7-4.5 ft	30.3 oz.	14.1"
8-34x56 FFP	Exposed	30 mm	APLR2 FFP IR MOA APMR FFP IR MIL	Matte	3.3"	12.5-3 ft	32.0 oz	15.5"
10-40x56 SFP	Exposed	30 mm	BLR SFP MOA	Matte	3"	12.6-3.1 ft	31.8 oz	16.3"

### PRODUCT FEATURES



First/Second Focal Plane Reticle, High Precision Erector System, Side Parallax Adjustment, Illuminated Glass Reticles, Waterproof

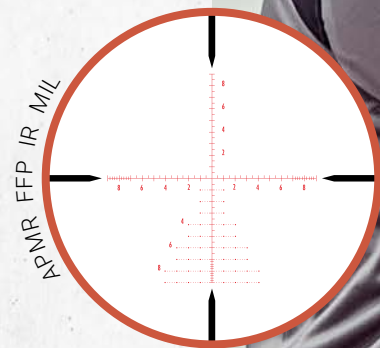

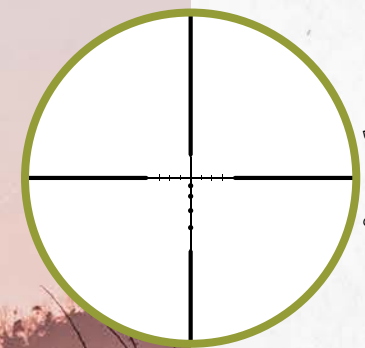

BDC 600



BDC 600A



AHMC SFP MOA



MIL-DOT

# ARGOS HMR

## RIFLESCOPES

The Argos HMR is designed from the ground up with the average outdoorsman in mind. This compact and durable hunting scope is a feature-rich, yet affordable option. 5x and 6x magnification ratios are ideally suited for a wide variety of close- and long-range hunting. Advanced Fully Multi-Coated lenses paired with clean and concise reticles like an illuminated center-dot crosshair, Mil-Dot, or BDC reticle options for a fool-proof traditional setup.



2-12x42 SFP



4-20x50 SFP

### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
2-12x42 SFP	Capped	1 in	BDC 600	Matte	3.6"	55.7-9.6 ft	19.8 oz	10.8"
			BDC 600A					
			AHMC SFP MOA					
4-20x50 SFP	Capped	1 in	BDC 600A	Matte	3.6"	27.9-5.6 ft	21.0 oz	13.3"
			AHMC SFP MOA					
			MIL-DOT					

### PRODUCT FEATURES



Second Focal Plane, Aircraft Grade Aluminum - 1 inch Tubes, Capped Turrets, Illuminated Glass Reticles

# TALOS BTR

## RIFLESCOPES


The Talos BTR is available in two configurations; 4-14x44 - First Focal Plane or 1-4x24 Second Focal Plane. Both of these scopes are great entry level scopes for competitive and tactical shooting. Featuring Multi-Coated lenses for clarity and brightness in low light conditions as well as being waterproof, this family is ready to get you started shooting.



1-4x24 SFP




4-14x44 FFP

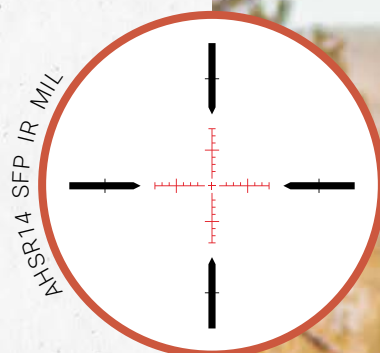

### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-4x24 SFP	Exposed	30 mm	AHSR14 SFP IR MIL	Matte	6.26- 3.5"	110- 26 ft	18 oz	9.2"
4-14x44 FFP	Exposed	30 mm	APLR2 FFP IR MIL	Matte	3.23- 3.15"	27.2- 7.9 ft	23.6 oz	12.9"

### PRODUCT FEATURES



Side Parallax Adjustment,  
Illuminated Glass Reticles,  
Exposed Turrets, First/Second  
Focal Plane





# TALOS

RIFLESCOPES

If you ask any hunter they'll tell you they have probably filled more tags in the low-light hours than any other time. The Talos scope with Fully Multi-Coated lenses for clarity and brightness in low light, you'll be able to add precious minutes to every hunting day that you've worked so hard for. These scopes, with their 4X magnification range, will give you great versatility whether you are hunting whitetails in the dense forest or prairie dogs in the wide open ranges. With its one-piece tube design, the Talos line includes an assortment of specialty scopes for big-game, varmint, MSR's, 22 rimfire, slug, black powder and turkey hunting.



## PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
3-12x40 SFP	Capped	1 in	BDC 600 IR	Matte	3.82-3.35"	34.1 - 8.9 ft	16.2 oz	12"
			CENTER X					
			MIL-DOT					
4-16x40 SFP	Capped	1 in	BDC 600 IR	Matte	3.8-3.35"	24.1 - 6.3 ft	19.1 oz	12.9"
			MIL-DOT					
6-24x50 SFP	Capped	1 in	BDC 600 IR	Matte	3.03-3.11"	16.8 - 4.5 ft	23 oz	13.9"
			ATMR1 SFP IR MIL					

## PRODUCT FEATURES



Side Parallax Adjustment, 6063 Aluminum - 1 inch Tubes, Illuminated Glass Reticles, Capped Turrets, Second Focal Plane

# NEOS

## RIFLESCOPES

Increasing your success while hunting doesn't necessarily have to decrease your savings account. The perfect example of that is the Neos series. This is the perfect scope for those who want quality and features all while staying on budget. The Neos has an impressive list of features which are designed and built to endure. It has a one piece aluminum tube. The lenses are Fully Multi Coated. Some of the models even have the latest side parallax focus technology. What about the cost? Let's just say the scope isn't the only thing that looks good, with ruggedness and precision we are proud of!



3-9x40 SFP



4-12x40 SFP




6-18x44 SFP



### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
3-9x40 SFP	Capped	1 in	CENTER X	Matte	2.99- 3.07"	37.8- 12.6 ft	17 oz	12.4"
			BDC 500 IR					
			BDC 22 RIM FIRE					
4-12x40 SFP	Capped	1 in	CENTER X	Matte	3.11- 3.15"	27.3- 8.9 ft	18.1 oz	12.4"
			BDC 500 IR					
			BDC 22 RIM FIRE					
6-18x44 SFP	Capped	1 in	CENTER X	Matte	3.39- 3.19"	17.5- 5.9 ft	21.7 oz	13.5"
			BDC 500 IR					


### PRODUCT FEATURES



Second Focal Plane Reticle,  
Side Parallax Adjustment,  
6063 Aluminum - 1 inch  
Tubes, Illuminated Glass  
Reticles, Capped Turrets

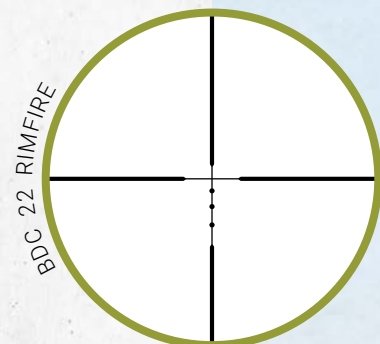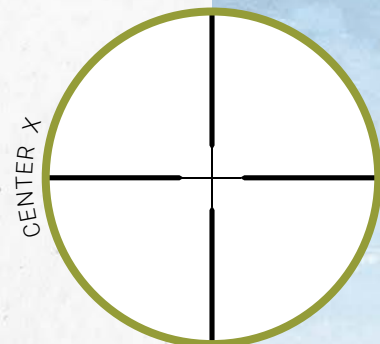



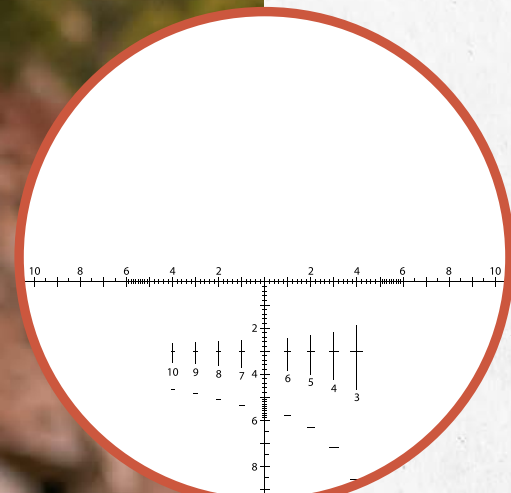

TSSR FFP MIL

# CRONUS TACTICAL UHD

## SPOTTING SCOPES

Whether you are a long range shooter, hunter or part of a sniper team, the new Cronus Tactical 7-42x60 Spotting Scope with our ranging reticle will make your job a breeze. The TSSR FFP MIL reticle is great for both range estimation and tactical cooperation with the shooter. Feature rich from tip to tip, this is an optic that will not be left behind. The unique design of a high riser mount will allow you to mount your Athlon Laser Rangefinders on the top and tilt it to co-witness with your spotting scope.



7-42x60 mm - GREEN



7-42x60 mm - TAN

### PRODUCT SPECIFICATION

\* The rail mounting system is included in both models

POWER X OBJ. LENS	OBJ. LENS DIAMETER	FOCUS RANGE	AVAILABLE RETICLES	EYE RELIEF	FOV @1000 YARDS	WEIGHT	LENGTH
7-42x60 UHD FFP	60 mm	10 yds - ∞	TSSR FFP MIL	1.18"	284 - 47.6 ft	46.6 oz	13.9"

### PRODUCT FEATURES



Aluminum Alloy Chassis,  
Ranging Reticle, Tripod  
Adaptable, Rubber Armor

# CRONUS UHD

## SPOTTING SCOPES

You've just adjusted focus on what had once been only an elusive lifelong quest- an Alaskan Bighorn or a Red-Throated Pipit. We developed this "Award Winning" Cronus Spotting Scope to give you one of world's best optics with brighter and clearer edge-to-edge detail. So whether you're hunting above timberline in Alaska or birding at sea level at Cape May, you will know every detail of your trophy before you take the shot or mark it off your life list. The Cronus product line has just about every feature you would put in a scope to make it the best you can get in its class.

We designed the Cronus with the Apochromatic system to give your images greater contrast, sharpness and color definition. We included UHD glass that delivers clearer and sharper image to your eyes. Our state of the art ESP (Enhance Spectral Prism) dielectric lens coating that reflects 99% of the light through the prism assembly. Other design enhancements include BaK-4 prisms and our "Advanced Fully Multi-Coated" lenses deliver flawless color fidelity, ultra-crisp images and optimum light transmission. Finally we topped off with our XPL coating that gives you extra protection on the exterior lenses from dirt, oil and scratches.



### PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x86 UHD	45	0.78"	29.5 ft	117 - 60 ft	66.5 oz	13.6x3.9"
12-36x50 UHD	45	0.7"	26.2 ft	171 - 90 ft	26.5 oz	9.8x2.6"

### PRODUCT FEATURES

BaK4 Prisms, Magnesium Chassis, Waterproof, Dual Focus, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable






# ARES G2 UHD

## SPOTTING SCOPES

Raising the bar for versatility in a spotting scope, the Ares G2 UHD 15-45x65 is an exceptionally useful tool in the outdoor enthusiasts' arsenal. Compact and light enough for long treks through rugged terrain with clarity and magnification for long range viewing. Pair with the optional ranging reticle eyepiece to accurately estimate game or make calls for your buddy at the range.

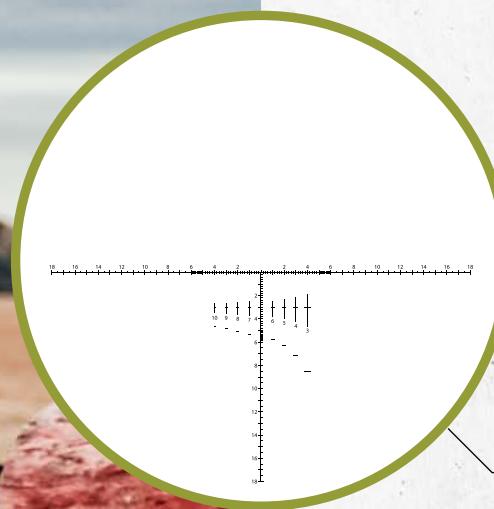

TSSR2 SFP MIL



22X Reticle Eyepiece



15-45x65 mm



15-45x65 mm

### PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
15-45x65 G2 UHD	45 Degree	0.75"-0.63"	13.1 ft	171 - 81 ft	45.9 oz	11.9x3.0"
15-45x65 G2 UHD	Straight	0.75"-0.63"	13.1 ft	171 - 81 ft	49.3 oz	13.5x3.0"
22X Reticle Eyepiece	45 Degree/Straight	0.78"	13.1 ft	143 ft	8.0 oz	2.75x2.0"

### PRODUCT FEATURES




BaK4 Prisms, Magnesium Chassis, Waterproof, Dual Focus, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable



# ARES G2 UHD

SPOTTING SCOPES

When details matter, look no further than the 20-60x85 Ares G2 UHD. Whether you are a birder looking for variances in plumage, or a precision shooter spotting impacts at 1,000 yards the extra-low dispersion glass provides vivid clarity and resolution in a full-size spotting scope.

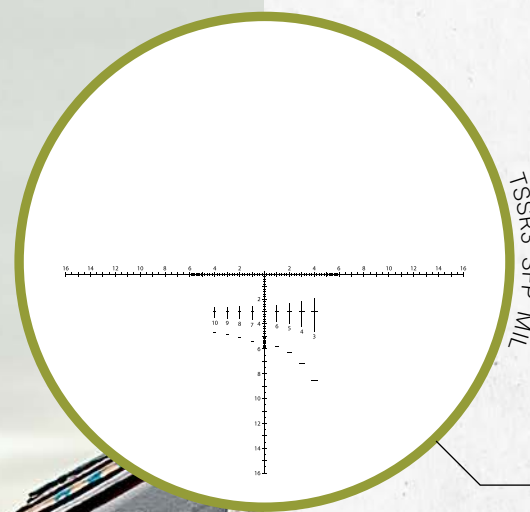

TSSR3 SFP MIL



28X Reticle Eyepiece



NEW

20-60x85 mm



NEW

20-60x85 mm

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x85 UHD	45 Degree	0.77"-0.70"	39.4 ft	102 - 48 ft	70.0 oz	16.9x4.0"
20-60x85 UHD	Straight	0.77"-0.70"	39.4 ft	102 - 48 ft	68.9 oz	16.9x4.0"
28X Reticle Eyepiece	45 Degree/Straight	0.67"	39.4 ft	112 ft	8.0 oz	2.75x2.0"

## PRODUCT FEATURES



BaK4 Prisms, Magnesium Chassis, Waterproof, Dual Focus, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable

# ARGOS HD

## SPOTTING SCOPES

We designed the Argos family of spotting scopes with good optical quality and ease of use in mind. The Argos spotting scope features our wind band fully multi-coated lenses and porro prisms with phased coating. They bring great clarity and brightness within the reach of all enthusiasts. The light-weight composite chassis protected by rubber armor is fog proof, waterproof, and filled with nitrogen gas to prevent internal fogging and promote better thermal stability. The product comes with a specially designed soft case allowing you to mount the spotting scope on a tripod and use it with the soft case on it all the time.



### PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x85 HD	45 Degree	0.77"-0.70"	39.4 ft	102 - 48 ft	70.0 oz	16.9x4.0"
20-60x85 HD	Straight	0.77"-0.70"	39.4 ft	102 - 48 ft	68.9 oz	16.9x4.0"

### PRODUCT FEATURES



Composite Chassis, Fog Proof, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable



# TALOS

## SPOTTING SCOPES

We designed the Talos family of spotting scopes with good optical quality and ease of use in mind. The Talos spotting scope features our fully multi-coated lenses and K9 prisms with silver coating. They bring great clarity and brightness within the reach of all enthusiasts. The light-weight composite chassis is fog proof, waterproof, and filled with nitrogen gas to prevent internal fogging and promote better thermal stability. The product comes with a table-top tripod and soft case allowing you to carry the spotting scope and tripod in one package.



20-60x80 mm - TAN

20-60x80 mm - GREEN

### PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x80	45 Degree	0.70"-0.60"	19.7 ft	82.9 - 48 ft	38.5 oz	16.5x3.75"

### PRODUCT FEATURES



Composite Chassis, Fog Proof, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable






# MIDAS

## RED DOT SIGHTS

The speed and versatility of a Red Dot goes unmatched in close range engagements. Whether you are running an AR or PCC in competition, hunting, or running a Red Dot on an optics ready pistol, the TSR series of Red Dots has you covered. With 50,000 hours of battery life and motion sensor activation, the TSR series is always ready.

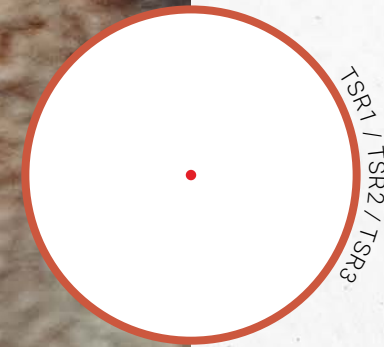

Midas TSR1



Midas TSR2



Midas TSR3



Midas LE

NEW


### PRODUCT SPECIFICATION

\*Measured with Hi-Riser Mount

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	PARALLAX	AVAILABLE RETICLES	DOT COLOR	IR SETTING	CENTER HEIGHT	CLICK VALUE	BATTERY	WEIGHT	LENGTH
TSR1	24x17 mm	1X	0 MOA	TSR1	Red	1-10	0.96"	1 MOA	CR2032	2.8 oz	1.88"
TSR2	20 mm	1X	<1 MOA	TSR2	Red	1-13	*1.59"	0.5 MOA	AAA	6.7 oz	2.79"
TSR3	36 mm	1X	<1 MOA	TSR3	Red	1-13	1.39"	0.5 MOA	CR2032	10.6 oz	3.73"
LE	28x36 mm	1X	0 MOA	LE	Red	1-10	1.29"	0.5 MOA	CR2032	7.0 oz	3.35"

### PRODUCT FEATURES

\* Available on Midas TSR1, TSR2, and TSR3





\* Adjustable Illumination Settings, Aircraft Aluminum, One Piece Chassis Construction, Fog Proof, Shockproof, Picatinny Rail Mount



# MIDAS

## PRISM SCOPES

When you want quick target acquisition at both short and medium ranges you need additional magnification. Athlon prism scopes give you great versatility. This optic is equipped with a prism for a crisp, vivid image. The prism-based design allows for a more compact scope without sacrificing optical quality. With this longer focal length it can achieve the magnification needed to reach out and touch targets at longer ranges. Featuring a selectable red/green illuminated reticle with multiple intensity levels to match your specific conditions. The reticles are etched directly on the glass to make sure you have consistent point-of-aim at all times. Whether you have the illumination on or off, the reticle is always visible.




### PRODUCT SPECIFICATION

\*User selectable red/green illumination, black reticle (off)

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	FOV @100 YARDS	AVAILABLE RETICLES	RETICLE COLOR	CENTER HEIGHT	CLICK VALUE	BATTERY	WEIGHT	LENGTH
TSP1	21 mm	1X	66 ft	TSP1	*Red/Green	0.88"L/ 1.49"H	1 MOA	AAA	6.25 oz	2.70"
TSP3	28 mm	3X	34 ft	TSP3	*Red/Green	1.39"	0.5 MOA	CR2032	16.0 oz	5.1"
TSP4	30 mm	3.9X	9 ft	TSP4	*Red/Green	1.39"	0.5 MOA	CR2032	16.8 oz	5.7"

### PRODUCT FEATURES



Adjustable Illumination Settings, Aircraft Aluminum, One Piece Chassis Construction, Fog Proof, Shockproof, Picatinny Rail Mount, Auto power shut-off (6 hours), Capped Turrets







Many times when in the field or during competitions you need to transition between no magnification for speed in close-range combat and magnification for precision shooting as situation dictates.

The Athlon 3 or 5 power magnifier mounts behind a traditional red-dot sight to provide magnification when needed. The mount has the ability to swing out of the way when not in use, but can quickly be placed behind the Red Dot to increase the magnification for longer mid-range shots. Rugged construction. Multi-coated lenses and 30mm tube for excellent light transmission. Nitrogen purged, shockproof, waterproof, and fogproof.



Midas MG31



Midas MG51



Midas MG31 - Flip Mount with Riser



Midas MG51 - Flip Mount with Riser

### PRODUCT SPECIFICATION

\* Standard flip mount; \*\* Standard flip mount with riser

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	FOV @100 YARDS	EYE RELIEF	WEIGHT	LENGTH	*CENTER HEIGHT	**CENTER HEIGHT
MG31	27.5 mm	3X	38.2 ft	2.8"	9.5 oz	4.2"	1.32"	1.56"
MG51	30 mm	5X	24.7 ft	2.6"	12.6 oz	4.8"	1.32"	1.56"

### PRODUCT FEATURES



Fog Proof, Shockproof, One Piece Chassis Construction, Aircraft Grade Aluminum, Flip Mount with riser

# TALOS 800Y

## RANGEFINDERS

Take to the field with confidence in your next shot. The Athlon Talos laser rangefinder brings affordability to the average hunter. Accurately ranges deer-sized game from 6 to 300 yards and reflective targets out to 850 yards. Regardless of terrain, get an accurate range estimate in yards or meters. The Talos range finder can provide a true line-of-sight measurement or an angle compensated distance when shooting from elevated positions.



Talos 800Y - BROWN

### RANGING MODES TO CHOOSE FROM

INCLINE ANGLE (T) MODE	Displays the incline angle of your position to the target.
HORIZONTAL DISTANCE (H) MODE	Displays the angle compensated distance to the target. This is the primary mode used by most hunters (Both bow and rifle).
VERTICAL DISTANCE (V) MODE	Displays the vertical distance of your position to the target.

### PRODUCT SPECIFICATION

RANGING REFLECTIVE	RANGING DEER	ACCURACY	MAX ANGLE READING	MAGNIFICATION	OBJ. LENS DIAMETER	FOV	EYE RELIEF	POWER SUPPLY
800 Y	300 Y	±1Y	±70°	6X	21 mm	7°	14 mm	CR2-3V

### PRODUCT FEATURES




Tripod Adaptable, Scan Mode, Dual Units of Measurement of Distance (Y/M), Angle Compensation Mode, Diopter Adjustment



# MIDAS 1 MILE

RANGEFINDERS

After a brutal hike or a long sit in the tree stand, it all comes down to one shot. Don't misjudge your distance, you've come too far to miss now. Use the scan mode to quickly scan the field from 5 yards to 1 mile. Displays distances in yards or meters and 3 different ranging modes: Horizontal (line of sight), Vertical and Angle compensated. Waterproofing and non-slip grip Rubber Armor protect the Midas 1 Mile on the toughest hunts.

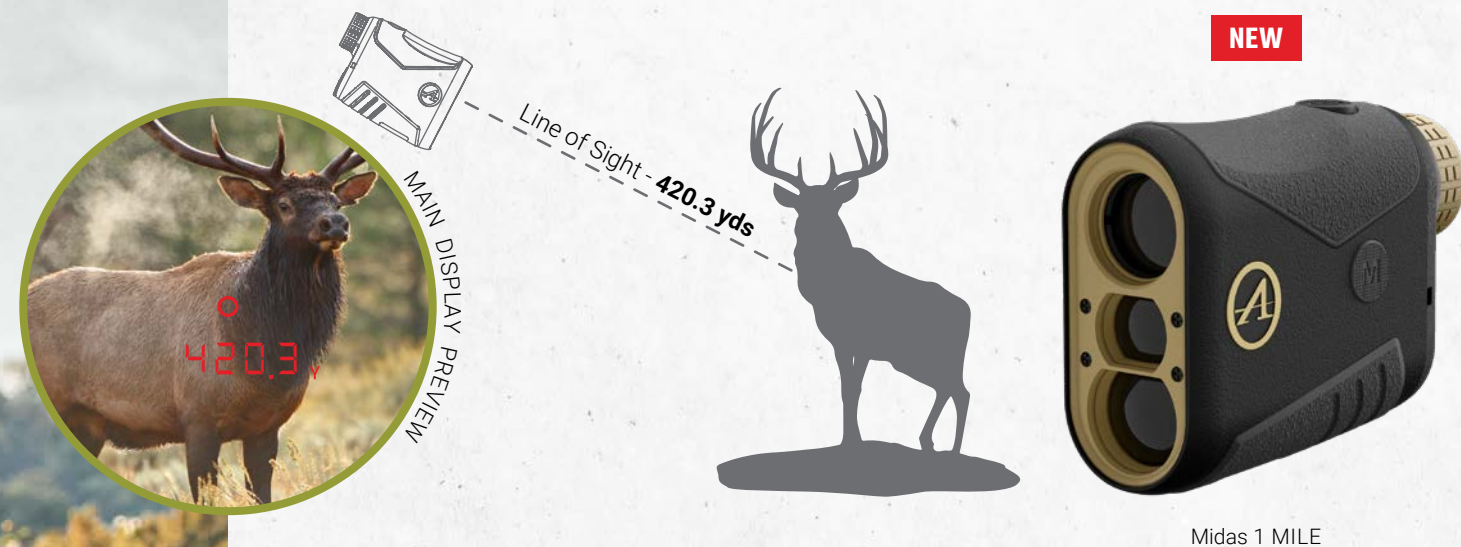

NEW

Midas 1 MILE

## RANGING MODES TO CHOOSE FROM

- INCLINE ANGLE (T) MODE** Displays the incline angle of your position to the target.
- HORIZONTAL DISTANCE (H) MODE** Displays the angle compensated distance to the target. This is the primary mode used by most hunters (Both bow and rifle).
- VERTICAL DISTANCE (V) MODE** Displays the vertical distance of your position to the target.

## PRODUCT SPECIFICATION

RANGING REFLECTIVE	RANGING DEER	ACCURACY	MAX ANGLE READING	MAGNIFICATION	OBJ. LENS DIAMETER	FOV	EYE RELIEF	POWER SUPPLY
1760 Y	800 Y	±0.5Y	±70°	6X	21mm	6°	15mm	CR2-3V

## PRODUCT FEATURES




Tripod Adaptable, Scan Mode, Dual Units of Measurement of Distance (Y/M), Angle Compensation Mode, Diopter Adjustment

# QUICK COMPARISON

## RIFLESCOPES


The following table contains detailed specifications of all Athlon Optics riflescopes allowing you to compare them easily and find the right one for you.

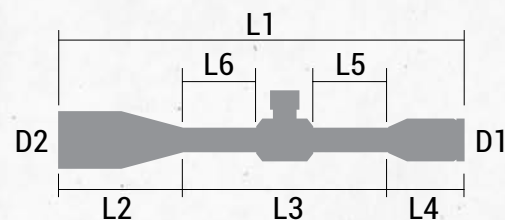

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	EYE RELIEF	FOV @100 YARDS	WEIGHT	CLICK VALUE	ADJ. PER ROTATION	TOTAL ELEVATION ADJ.	TOTAL WINDAGE ADJ.	PARALLAX ADJ.	PURGING MAT.	DIMENSIONS								
													L1	L2	L3	L4	L5	L6	D1	D2	
<b>CRONUS BTR GEN2 UHD</b>																					
1-6x24 SFP	Exposed	30 mm	ATSR2 SFP IR MOA	3.6-4.0"	106.9-17.7 ft	18.8 oz	0.5 MOA	32 MOA	120 MOA	120 MOA	Fixed 100 yds	Argon	10.4" /	6.9"	3.5"	2.0"	3.6"	1.7"	1.2"		
			APLR5 FFP IR MOA					0.25 MOA	25 MOA	110 MOA	64 MOA	Side Focus 10yds - ∞									
4.5-29x56 FFP	Exposed	34 mm	APRS1 FFP IR MIL	3.6-3.8"	24.8-3.83 ft	35.8 oz		0.1 MIL	10 MIL	32 MIL	18 MIL	Argon	14.1"	3.9"	6.3"	3.9"	2.6"	2.0"	1.8"	2.6"	
			APRS6 FFP IR MIL																		
<b>ARES ETR UHD</b>																					
* Exposed - Elevation Turret / Capped - Windage Turret ** Locking Feature on Windage only																					
1-10x24 FFP	*Exposed/Capped	34 mm	ATMR2 FFP IR MOA	3.7"	117.3-11.7 ft	19.2 oz		0.25 MOA	25 MOA	100 MOA	80 MOA	Side Focus 10yds - ∞	Argon	10.0"	6.9"	3.1"	2.5"	2.6"	1.8"	1.3"	
			ATMR3 FFP IR MIL					0.1 MIL	10 MIL	29 MIL	25 MIL										
3-18x50 FFP	**Exposed/Locking	34 mm	APLR6 FFP IR MOA	3.74"	39.2-6.65 ft	34.5 oz		0.25 MOA	25 MOA	110 MOA	80 MOA	Side Focus 10yds - ∞	Argon	14.2"	4.2"	6.6"	3.4"	2.6"	2.5"	1.83"	2.25"
			APRS6 FFP IR MIL					0.1 MIL	10 MIL	32 MIL	25 MIL										
4.5-30x56 FFP	**Exposed/Locking	34 mm	APLR2 FFP IR MOA	3.9"	24.5-3.75 ft	36.5 oz		0.25 MOA	25 MOA	110 MOA	110 MOA	Side Focus 25yds - ∞	Argon	15.3"	5.0"	6.6"	3.7"	2.7"	2.3"	1.83"	2.5"
			APLR5 FFP IR MOA					0.1 MIL	10 MIL	32 MIL	32 MIL										
			APRS1 FFP IR MIL																		
			APRS6 FFP IR MIL																		
<b>ARES BTR GEN2 HD</b>																					
2.5-15x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA	3.9"	41.8-6.8 ft	25.1 oz		0.25 MOA	25 MOA	100 MOA	100 MOA	Side Focus 10yds - ∞	Argon	13.8"	4.7"	5.5"	3.6"	1.8"	2.2"	1.78"	2.25"
			APRS5 FFP IR MIL					0.1 MIL	10 MIL	29 MIL	29 MIL										
4.5-27x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA	3.9"	22.7-3.8 ft	27.3 oz		0.25 MOA	25 MOA	80 MOA	80 MOA	Side Focus 25yds - ∞	Argon	13.8"	4.7"	5.5"	3.6"	1.8"	2.2"	1.78"	2.25"
			APRS5 FFP IR MIL					0.1 MIL	10 MIL	24 MIL	24 MIL										
<b>MIDAS TAC HD</b>																					
* Exposed - Elevation Turret / Capped - Windage Turret																					
4-16x44 FFP	*Exposed/Capped	30 mm	APRS2 FFP MIL	3.7"	27.7-7 ft	23.8 oz		0.1 MIL	10 MIL	30 MIL	15 MIL	Side Focus 10yds - ∞	Argon	14.2"	4.3"	6.3"	3.6"	2.5"	2.6"	1.71"	2.0"
			APLR4 FFP MOA					0.25 MOA	25 MOA	110 MOA	110 MOA	Side Focus 25yds - ∞	Argon	15.1"	4.8"	6.6"	3.7"	2.7"	2.36"	1.83"	2.5"
5-25x56 FFP	*Exposed/Capped	34 mm	APRS3 FFP MIL	3.7"	22.1-4.5 ft	30.0 oz		0.1 MIL	10 MIL	32 MIL	32 MIL	Side Focus 25yds - ∞	Argon	15.1"	4.8"	6.6"	3.7"	2.7"	2.36"	1.83"	2.5"
			APRS6 FFP MIL																		
6-24x50 FFP	*Exposed/Capped	30 mm	APLR4 FFP MOA	3.7"	17.8-4.6 ft	26.3 oz		0.25 MOA	25 MOA	85 MOA	50 MOA	Side Focus 10yds - ∞	Argon	14.6"	4.5"	6.3"	3.8"	2.2"	2.6"	1.71"	2.25"
			APRS2 FFP MIL					0.1 MIL	10 MIL	25 MIL	15 MIL										
			APRS3 FFP MIL																		
<b>MIDAS HMR HD</b>																					
2.5-15x50 SFP	Capped	30 mm	AHMR SFP IR MOA	3.9"	41.8-6.8 ft	26.0 oz		0.25 MOA	15 MOA	60 MOA	60 MOA	Side Focus 10yds - ∞	Argon	13.8"	4.8"	5.5"	3.5"	2.0"	2.4"	1.8"	2.3"
			BDC 600A																		
<b>MIDAS BTR GEN2 HD</b>																					
1-6x24 FFP	Capped	30 mm	ATSR16 SFP IR MOA	3.8"	108-17.6 ft	18.1 oz		0.25 MOA	30 MOA	150 MOA	150 MOA	Fixed 100 yds	Argon	10.6"	7"	3.7"	2.3"	3.5"	1.7"	1.2"	
			ATSR4 SFP IR MOA																		
4.5-27x50 SFP	Exposed	30 mm	AHMR SFP IR MOA	3.9"	22.7-3.6 ft	26.0 oz		0.25 MOA	25 MOA	85 MOA	85 MOA	Side Focus 30 yds - ∞	Argon	13.8"	4.8"	5.5"	3.5"	2"	2.4"	1.8"	2.3"
			APRS4 SFP IR MIL					0.1 MIL	10 MIL	25 MIL	25 MIL										

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	EYE RELIEF	FOV @100 YARDS	WEIGHT	CLICK VALUE	ADJ. PER ROTATION	TOTAL ELEVATION ADJ.	TOTAL WINDAGE ADJ.	PARALLAX ADJ.	PURGING MAT.	DIMENSIONS								
													L1	L2	L3	L4	L5	L6	D1	D2	
<b>HELOS BTR / *GEN2</b>																					
*1-10x28 SFP	Capped	34 mm	ATMR4 SFP IR MOA	3.2"	110-10 ft	16.1 oz	0.5 MOA	44 MOA	100 MOA	100 MOA	Fixed 100 yds	Argon	10.3" /	6.9"	3.4"	2.0"	3.1"	1.65"	1.3"		
1-4.5x24 SFP	Exposed	30 mm	ATSR3 SFP IR MOA	3.2"	100-22 ft	22.9 oz	0.25 MOA	23 MOA	80 MOA	80 MOA	Side Focus 10yds - ∞	Argon	9.5" /	6.0"	3.5"	1.9"	2.1"	1.6"	1.2"		
*2-12x42 FFP	Exposed	30 mm	AHMR2 FFP IR MOA	3.6"	55.7-9.6 ft	22.6 oz		0.25 MOA	25 MOA	110 MOA	80 MOA	Side Focus 10yds - ∞	Argon	11.8"	2.9"	5.8"	3.1"	2.7"	1.5"	1.7"	1.95"
			AHMR2 FFP IR MIL					0.1 MIL	10 MIL	32 MIL	25 MIL										
*4-20x50 FFP	Exposed	30 mm	APLR6 FFP IR MOA	3.6"	27.9-5.6 ft	24.9 oz		0.25 MOA	25 MOA	100 MOA	80 MOA	Side Focus 10yds - ∞	Argon	13.3"	4.65"	5.55"	3.1"	2.0"	2.0"	1.7"	2.25"
			APRS6 FFP IR MIL					0.1 MIL	10 MIL	29 MIL	25 MIL										
*6-24x56 FFP	Exposed	34 mm	APLR6 FFP IR MOA	3.7"	19.9-5.12 ft	34.8 oz		0.25 MOA	25 MOA	100 MOA	80 MOA	Side Focus 10yds - ∞	Argon	14.3"	4.75"	6.0"	3.55"	2.4"	2.0"	1.85"	2.5"
			APRS6 FFP IR MIL					0.1 MIL	10 MIL	29 MIL	25 MIL										
<b>ARGOS BTR GEN2</b>																					
1-8x24 SFP	Capped	30 mm	ATSR5 SFP IR MOA	3.5"	110-14.5 ft	16.1 oz	0.5 MOA	44 MOA	120 MOA	120 MOA	Fixed 100 yds	Argon	9.8" /	6.2"	3.6"	2.3"	2.4"	1.8"	1.2"		
6-24x50 FFP	Exposed	30 mm	APLR2 FFP IR MOA	3.3"	16.7-4.5 ft	30.3 oz		0.25 MOA	12 MOA	60 MOA	60 MOA	Side Focus 10yds - ∞	Argon	14.1"	4.2"	6.2"	3.7"	2.0"	2.1"	1.8"	2.2"
			APMR FFP IR MIL					0.1 MIL	5 MIL	18 MIL	18 MIL										
8-34x56 FFP	Exposed	30 mm	APLR2 FFP IR MOA	3.3"	12.5-3 ft	32.0 oz		0.25 MOA	12 MOA	45 MOA	45 MOA	Side Focus 15yds - ∞	Argon	15.5"	4.9"	6.9"	3.7"	2.0"	2.9"	1.8"	2.5"
			APMR FFP IR MIL					0.1 MIL	5 MIL	13 MIL	13 MIL										
10-40x56 SFP	Exposed	30 mm	BLR SFP MOA	3"	12.6-3.1 ft	31.8 oz	0.125 MOA	6 MOA	45 MOA	45 MOA	Side Focus 15yds - ∞	Argon	16.3"	6.0"	6.8"	3.5"	1.5"	3.3"	1.8"	2.5"	
<b>ARGOS HMR</b>																					
2-12x42 SFP	Capped	1"	BDC 600	3.6"	55.7-9.6 ft	19.8 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10yds - ∞	Argon	11.8"	3.3"	5.3"	3.2"	2.1"	1.6"	1.7"	2.3"	
			BDC 600A																		
			AHMC SFP MOA																		
4-20x50 SFP	Capped	1"	BDC 600A	3.6"	27.9-5.6 ft	21.0 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10yds - ∞	Argon	13.2"	5.0"	5.0"	3.2"	1.8"	1.6"	1.7"	2.3"	
			AHMC SFP MOA					0.1 MIL	10 MIL	18 MIL	18 MIL										
			MIL-DOT																		
<b>TALOS BTR</b>																					
1-4x24 SFP	Exposed	30 mm	AHSR14 SFP IR MIL	6.26-3.5"	110-26 ft	18.0 oz	0.2 MIL	12 MIL	40 MIL	40 MIL	Fixed 100 yds	Nitrogen	9.2" /	5.6"	3.6"	1.9"	2.6"	1.8"	1.2"		
4-14x44 FFP	Exposed	30 mm	APLR2 FFP IR MIL	3.23-3.15"	27.2-7.9 ft	23.6 oz	0.1 MIL	5 MIL	20 MIL	20 MIL	Side Focus 10yds - ∞	Nitrogen	12.9"	3.9"	5.0"	4.0"	1.4"	2.0"	1.7"	1.8"	
<b>TALOS</b>																					
3-12x40 SFP	Capped	1"	BDC 600 IR	3.82-3.35"	34.1-8.9 ft	16.2 oz		0.25 MOA	15 MOA	60 MOA	60 MOA	Side Focus 15yds - ∞	Nitrogen	12"	3.6"	4.8"	3.7"	1.9"	1.3"	1.8"	1.9"
			CENTER X					0.1 MIL	5 MIL	20 MIL	20 MIL										
			MIL-DOT																		
4-16x40 SFP	Capped	1"	BDC 600 IR	3.8-3.35"	24.1-6.3 ft	19.1 oz		0.25 MOA	15 MOA	50 MOA	50 MOA	Side Focus 15yds - ∞	Nitrogen	12.9"	3.5"	5.8"	3.7"	1.9"	2.2"	1.8"	1.9"
			MIL-DOT					0.1 MIL	5 MIL	20 MIL	20 MIL										
6-24x50 SFP	Capped	1"	BDC 600 IR	3.03-3.11"	16.8-4.5 ft	23 oz		0.25 MOA	15 MOA	60 MOA	60 MOA	Side Focus 10yds - ∞	Nitrogen	13.9"	4.0"	6.2"	3.7"	1.9"	2.7"	1.8"	2.2"
			ATMR1 SFP IR MIL					0.1 MIL	5 MIL	18 MIL	18 MIL										
<b>NEOS</b>																					
3-9x40 SFP	Capped	1"	CENTER X	2.99-3.07"	37.8-12.6 ft	17.0 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Fixed 100 yds	Nitrogen	12.4"	3.3"	5.6"	3.5"	2.3"	2.3"	1.6"	1.9"	
			BDC 500 IR																		
			BDC 22 RIM FIRE																		
4-12x40 SFP	Capped	1"	CENTER X	3.11-3.15"	27.3-8.9 ft	18.1 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10yds - ∞	Nitrogen	12.4"	3.3"	5.6"	3.5"	2.3"	2.3"	1.6"	1.9"	
			BDC 500 IR		</																

### CRONUS BTR GEN2 UHD ATSR2 SFP IR MOA

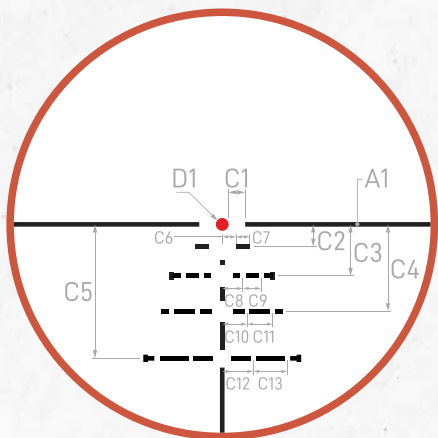


ATSR2 SFP IR MOA Designed around the .223/5.56mm using a 69 grain Sierra Match King and a 200 yard zero. The open center design allows shooters to engage 12-18" targets out to 600 yards by quickly bracketing the target. Subtension holds for 300, 400, 500, and 600 yards are calibrated to compensate for 0, 5, and 10 MPH winds. The 3-post cross hair design quickly draws the shooters attention to the illuminated center dot. Perfect for 3-gun competitions or the hunter looking for short to midrange engagement when seconds matter.

\*for 1-6x24: subtension valid @ 6x

SUBTENSIONS IN MOA

A1	C1	C2	C3	C4	C5	C6	C7
0.5	2.5	2.4	5.6	9.5	14.6	1.5	1.5
C8	C9	C10	C11	C12	C13	D1	
2.25	2	2.7	2.8	3.4	3.7	1.4	

### CRONUS BTR GEN2 UHD APRS1 FFP IR MIL

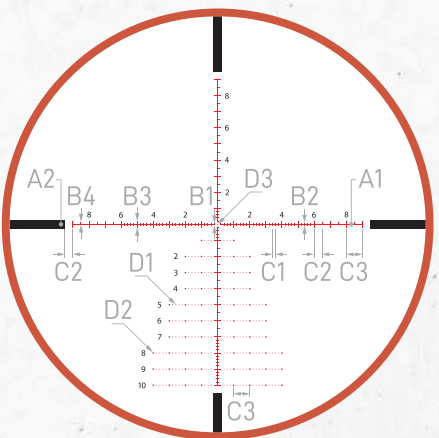


APRS1 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dials in elevation on their targets. The floating 0.04 center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.025	0.5	2.4	5.6	9.5	14.6
C1	C2	C3	D1	D2	D3
0.2	0.5	1	0.05	0.1	0.04

### ARES ETR UHD ATMR2 FFP IR MOA

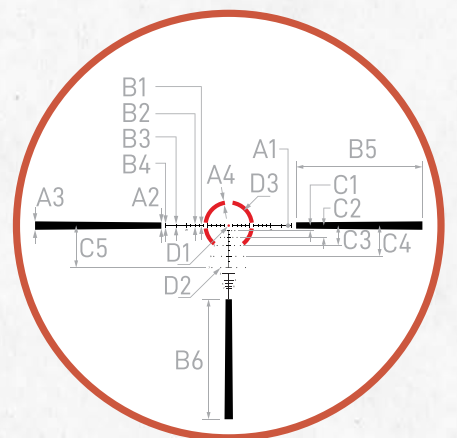


ATMR2 FFP IR MOA reticle is designed for fast close-range situations and mid-range shooting, using 68 or 69 gr .223/5.56 Nato cartridges. On 1x the 20 moa illuminated quartered ring and 1.2 moa center dot provide the same fast-acquisition capabilities of a standard red dot. Increasing magnification, the holdover and windage subtensions become visible. The .5 moa wind holds for 5 and 10 mph winds. As a First Focal Plane scope the reticle remains valid throughout the magnification range providing holdovers out to 700 yards. A built-in ranging tree on the lower vertical post provides quick range estimation on a 36" tall silhouette target.

SUBTENSIONS IN MOA

A1	A2	A3	A4	B1	B2	B3	B4	B5
0.25	3	4	2	0.4	1.2	1.5	2	60
B6	C1	C2	C3	C4	C5	D1	D2	D3
57	2.4	5.6	9.5	14.6	20	1.2	0.5	20

### ARES ETR UHD ATMR3 FFP IR MIL

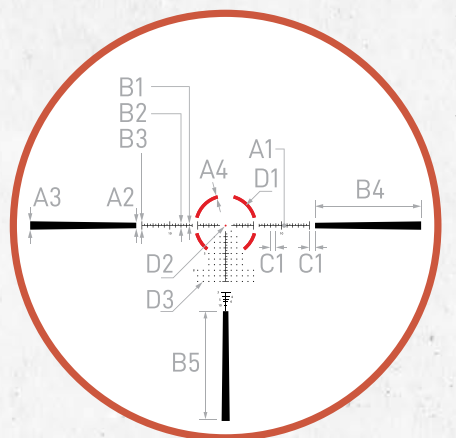


The most versatile scope in our line-up, paired with an equally versatile reticle. Fast CQB or long-range engagements are easily made thanks to this uniquely designed First Focal Plane reticle. The illuminated 10 mil quartered ring and precise .35 mil center aid in fast acquisition on low magnification. As the magnification increases the versatile holdover and windage subtensions become visible, turning this into a mid to long range capable optic. If mil ranging isn't for you, default to the simple silhouette target ranging tree at just above the vertical post.

SUBTENSIONS IN MIL

A1	A2	A3	A4	B1	B2	B3
0.11	1	1.5	0.6	0.3	0.8	1.5
B4	B5	C1	D1	D2	D3	
19	19.67	1	10	0.35	0.15	

### CRONUS BTR GEN2 UHD APLR5 FFP IR MOA

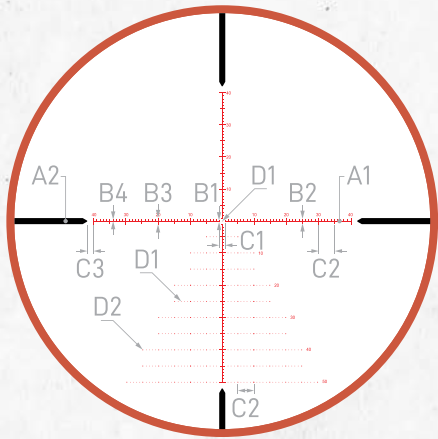


APLR5 FFP IR MOA reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of the fine 1 moa hash mark increments from center to 40 moa to both left and right helps the shooter determine a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.2 moa center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.13	2	0.6	1.5	2	0.5
C1	C2	C3	D1	D2	
2	5	2	0.2	0.3	

### CRONUS BTR UHD APRS6 FFP IR MIL

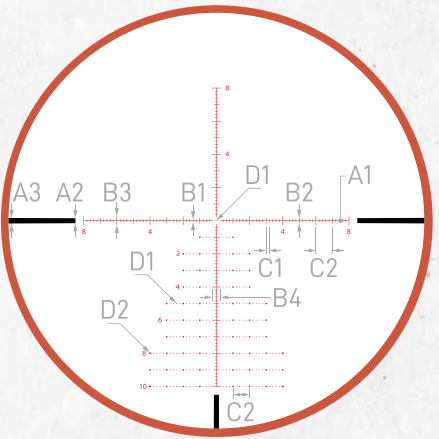


APRS6 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.025	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	D1	D2	D3
0.4	0.2	1	0.04	0.05	0.1

### ARES ETR UHD APLR6 FFP IR MOA

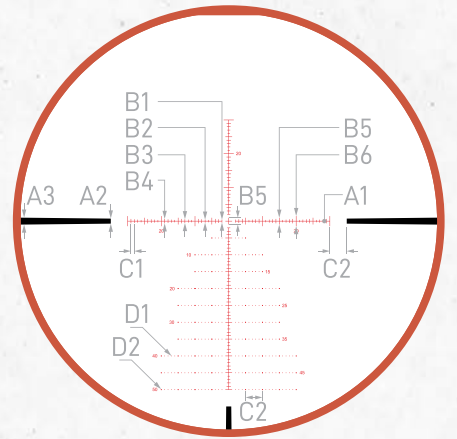


APLR6 FFP IR MOA reticle has a 2 moa floating center cross with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 40 moa in length at the 50 moa drop line. The unique design of the floating center cross with 2 moa span in the middle provides little to none target obstruction for engaging small targets at long distances.

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3	B4
0.18	1.5	2	0.7	0.9	1.1	1.3
B5	B6	C1	C2	D1	D2	
2	3	1	5	0.2	0.3	

### ARES ETR UHD APRS6 FFP IR MIL

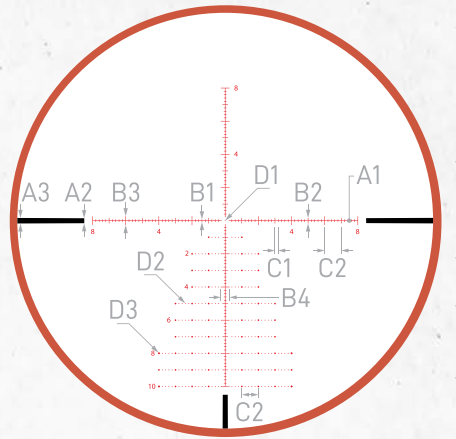


APRS6 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.05	0.4	0.6	0.18	0.35	0.55
B4	C1	C2	D1	D2	D3
0.4	0.2	1	0.05	0.06	0.1

**ARES ETR UHD**  
APLR5 FFP IR MOA

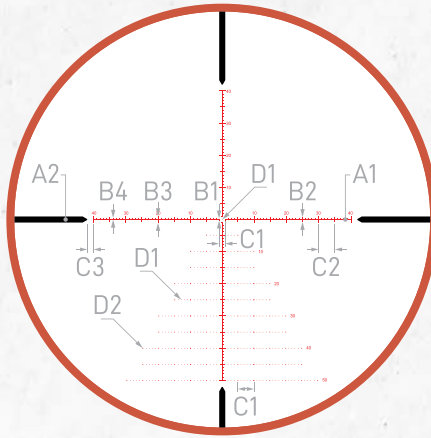


APLR5 FFP IR MOA reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of the fine 1 moa hash mark increments from center to 40 moa to both left and right helps the shooter determine a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.2 moa center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.13	2	0.6	1.5	2	0.5
C1	C2	C3	D1	D2	
2	5	2	0.2	0.3	

**ARES ETR UHD**  
APLR2 FFP IR MOA

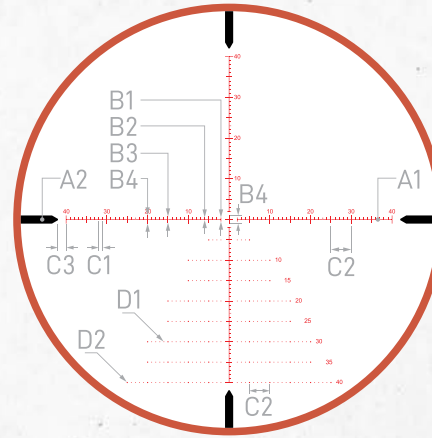


APLR2 FFP IR MOA reticle has a large illuminated center with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The illuminated portion has a 2 moa span center cross with illuminated cross line extends to 40 moa on both vertical and horizontal direction. The unique design of having droplines going down to 40 moa with 5 moa between each drop line and 1 moa hash marks in between provide excellent hold over positions for long precision shooting.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

**ARES BTR GEN2 HD**  
APRS5 FFP IR MIL

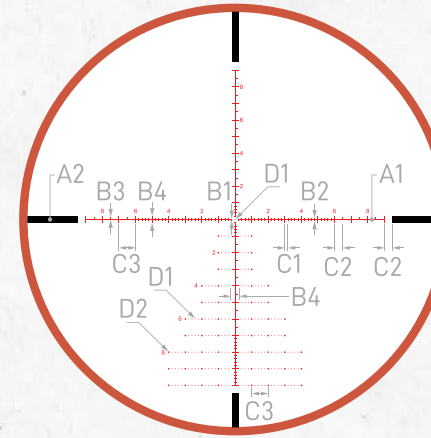


APRS5 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.06*	0.5*	0.1	0.18	0.15	0.4
C1	C2	C3	D1	D2	
0.2	0.5	1	0.05	0.1	

\*for 2.5-15x50: A1 = 0.06, A2 = 0.5  
for 4.5-27x50: A1 = 0.03, A2 = 0.4

**MIDAS TAC HD**  
APRS2 FFP MIL

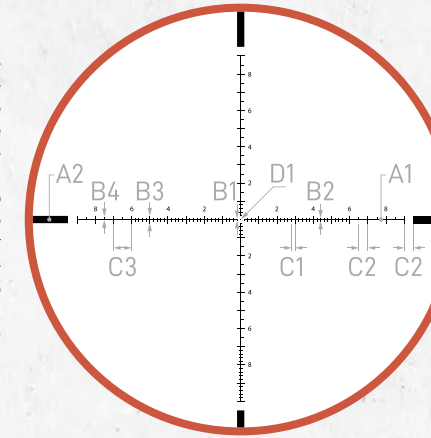


APRS2 FFP MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions and windage corrections. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.05 (0.06) center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	
0.04*	0.4	0.1	0.18	0.4	
B4	C1	C2	C3	D1	
0.15	0.2	0.5	1	0.06*	

\*for 4-16x44: A1 = 0.04, D1 = 0.06  
for 6-24x50: A1 = 0.03, D1 = 0.05

**ARES ETR UHD**  
APRS1 FFP IR MIL

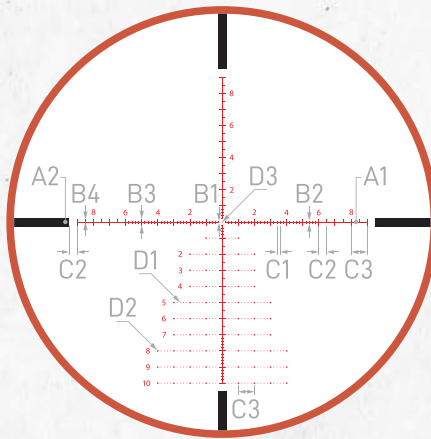


APRS1 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.03 center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.03	0.5	0.1	0.18	0.4	0.15
C1	C2	C3	D1	D2	D3
0.2	0.5	1	0.05	0.1	0.03

**ARES BTR GEN2 HD**  
APLR4 FFP IR MOA

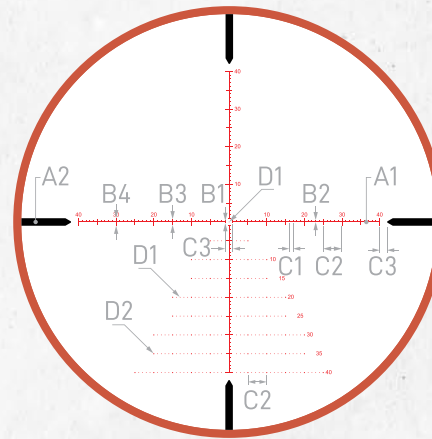


APLR4 FFP IR MOA reticle has a 0.2 moa floating center dot with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center dot and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 50 moa in length at the 40 moa drop line. The floating center dot with 2moa span gap in the middle provides little to none target obstruction for engaging small targets at long distances.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.24*	2	0.6	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

\*for 2.5-15x50: A1 = 0.24  
for 4.5-27x50: A1 = 0.13

**MIDAS TAC HD**  
APLR4 FFP MOA

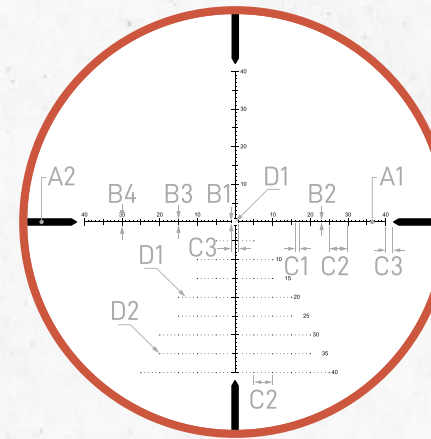


APLR4 FFP MOA reticle is a blend of precision marksman and long-range hunter. The open center design eliminates target obstruction by utilizing a .2 moa diameter dot. 1 moa hashmark increments provide fast holdovers up to 40 moa, compensating for both windage and elevation.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.12	2	0.6	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	


**MIDAS TAC HD**  
APRS3 FFP MIL

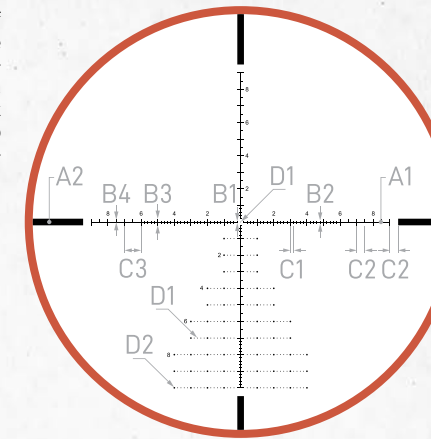

APRS3 FFP MIL reticle is a dual use design. Allowing the shooter to accurately range and compensate windage and elevation holdovers should they prefer not to make turret elevation adjustments between shots. Quick windage or lead holdovers is possible due to the .2 mil increment hash marks. This open-center reticle features a .05 mil floating dot, quickly drawing the shooter's attention to the center.

SUBTENSIONS IN MIL


A1	A2	B1	B2	B3	B4
0.03	0.4	0.1	0.18	0.4	0.15
C1	C2	C3	D1	D2	
0.2	0.5	1	0.05	0.1	

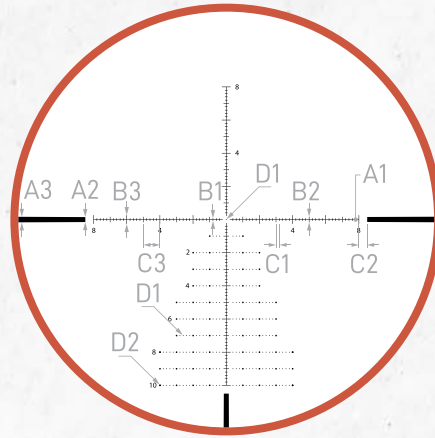**MIDAS TAC HD**  
 APRS6 FFP MIL


APRS6 FFP MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

**SUBTENSIONS IN MIL**

A1	A2	A3	B1	B2	B3
0.03	0.3	0.4	0.18	0.35	0.55
C1	C2	C3	D1	D2	
0.2	0.5	1	0.05	0.1	

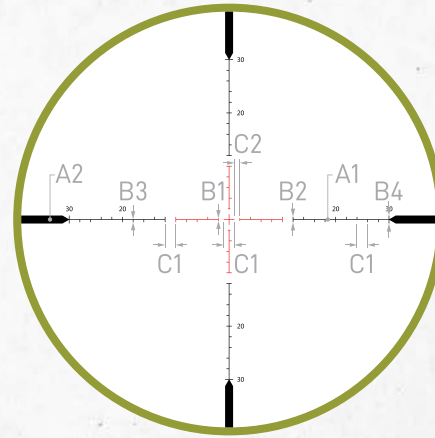
**MIDAS HMR HD**  
 AHMR SFP IR MOA


AHMR SFP IR MOA reticle has an illuminated 20 moa center with a 2 moa center cross and 2 moa incremental hash marks which provide a unique two layer visual reference for a shooter to locate and get dead on the target within a blink of an eye. The illuminated reticle provides excellent low light visibility. The unique design of the markings with 2 & 4 moa and 6 & 8 moa locating at the opposite side of the lines gives you a clear reading of the markings with no confusions.

\*for 2.5-15x50: subtension valid @ 15x

**SUBTENSIONS IN MOA**

A1	A2	B1	B2
0.12	1.5	0.5	1
B3	B4	C1	C2
0.5	1.5	2	1

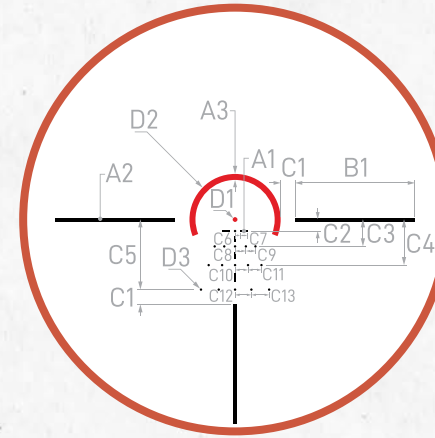
**MIDAS BTR GEN2 HD**  
 ATSR4 SFP IR MOA


ATSR4 SFP IR MOA reticle is designed for quick target acquisition, speed, and precision shooting in short to mid-range environments. Ideal for CQC and 3-gun competition, this reticle is calibrated for a 68 grain Hornady and 69 grain Sierra cartridges, and suitable for any 5.56 Nato/.223 caliber rifle using a 200 yard zero. The 25 moa horizontal and lower 1/3rd crosshairs quickly draw the shooters eye to the illuminated 19 moa horseshoe and 1.4 moa center dot. With a 200 yard zero, the precise .5 moa elevation holds compensate for 300, 400, 500, and 600 yards and 0, 5 and 10 MPH winds.

\*for 1-6x24: subtension valid @ 6x

**SUBTENSIONS IN MOA**

A1	A2	A3	B1	C1	C2	C3	C4	C5	C6
0.3	0.8	1.25	25	3	2.4	5.6	9.5	14.6	1.07
C7	C8	C9	C10	C11	C12	C13	D1	D2	D3
1.5	2.25	2	2.7	2.8	3.4	3.7	1.4	19	0.5

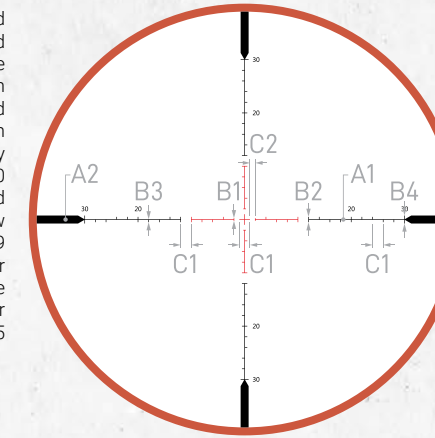
**MIDAS BTR GEN2 HD**  
 AHMR SFP IR MOA


AHMR SFP IR MOA reticle has an illuminated 20 moa center with a 2 moa center cross and 2 moa incremental hash marks which provide a unique two layer visual reference for a shooter to locate and get dead on the target within a blink of an eye. The illuminated reticle provides excellent low light visibility. The unique design of the markings with 2 & 4 moa and 6 & 8 moa locating at the opposite side of the lines gives you a clear reading of the markings with no confusions.

\*for 4.5-27x50: subtension valid @ 15x

**SUBTENSIONS IN MOA**

A1	A2	B1	B2
0.12	1.5	0.5	1
B3	B4	C1	C2
0.5	1.5	2	1

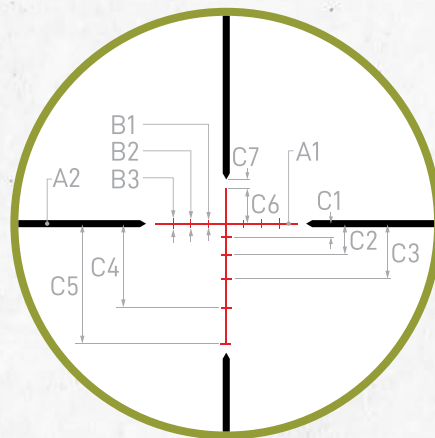
**MIDAS HMR HD**  
 BDC 600A IR


BDC 600A IR reticle can be used effectively with a variety of firearms giving your accurate ranges and reference marks which can be used to compensate for bullet drift in windy conditions or range distances. The user can sight in at 100 yards on any magnification setting, but for the ballistic reticle feature to function properly, the scope's magnification must be set to the correct power.

\*for 2.5-15x50: subtension valid @ 15x

**SUBTENSIONS IN MOA**

A1	A2	B1	B2	B3	C1
0.15	0.6	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	C7
3.5	6.25	9.5	13.6	4	1

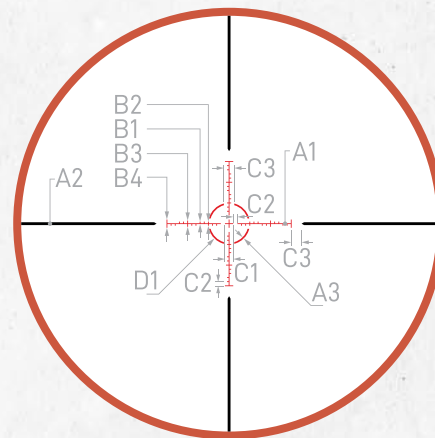
**MIDAS BTR GEN2 HD**  
 ATSR16 SFP IR MOA


ATSR16 SFP IR MOA reticle has a large illuminated center and 2 moa incremental hash marks, which help you quickly lock in your target and set holdover positions. The illuminated center with a 20 moa diameter circle in the middle has a 2 moa center cross and 2 moa incremental hash marks extended to 30 moa at each direction on both vertical and horizontal lines. The cross lines, middle circle, and center cross provide a unique three layer visual reference for a shooter to locate the target and set dead on the center cross within a blink of an eye.

\*for 1-6x24: subtension valid @ 6x

**SUBTENSIONS IN MOA**

A1	A2	A3	B1	B2	B3
0.4	1.38	0.75	1	2	3
B4	C1	C2	C3	D1	
4	4	2	5	20	

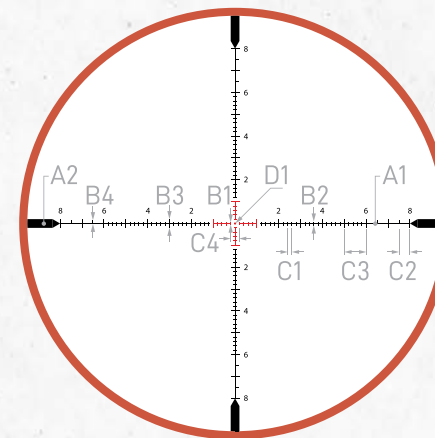
**MIDAS BTR GEN2 HD**  
 APRS4 SFP IR MIL


APRS4 SFP IR MIL reticle has an illuminated 2 mil center cross with an open center. A fine .1 diameter floating dot reduces target obstruction, while the illuminated cross provides excellent low light visibility. .2 mil incremental hashmarks out to 6 Mils for windage and elevation makes estimations easy.

\*for 4.5-27x50: subtension valid @ 15x

**SUBTENSIONS IN MIL**

A1	A2	B1	B2	B3	B4
0.04	0.4	0.1	0.8	0.4	0.15
C1	C2	C3	C4	D1	
0.2	0.5	1	0.4	0.1	

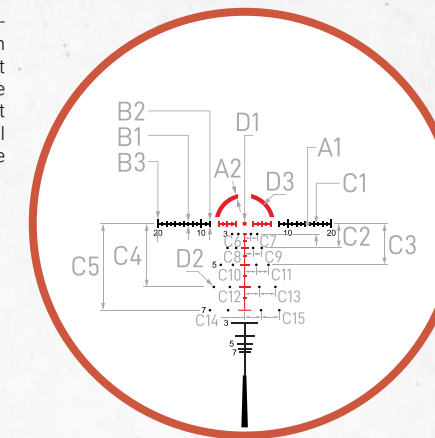**HELOS BTR GEN2**  
 ATMR4 SFP IR MOA


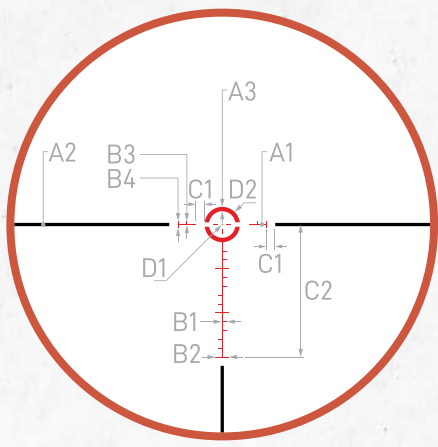
ATMR4 SFP IR MOA reticle is designed for the fast CQB or long-range engagements. The 12 moa illuminated quartered half circle aids in rapid acquisition for close range targets. The drop compensation is designed for 68 or 69 gr .223/5.56 Nato cartridges out to 700 yards. A target ranging reticle located just above the vertical post is designed to estimate target range on a 36" tall silhouette target.

\*for 1-10x28: subtension valid @ 10x

**SUBTENSIONS IN MOA**

A1	A2	B1	B2	B3	C1	C2	C3	C4	C5	C6	C7
0.25	1	0.8	1.2	2	2.4	5.6	9.5	14.6	20	1.4	1.5
C8	C9	C10	C11	C12	C13	C14	C15	D1	D2	D3	
1.95	2.1	2.7	2.8	3.4	3.7	3.8	4.2	1	0.6	12	

**HELOS BTR**  
ATSR3 SFP IR MOA




ATSR3 SFP IR MOA is designed for High Power Service Rifle matches. A 12 moa center circle outlines a 8 moa floating cross with a precise .5 moa center dot. The outer circle helps the shooter find the quickly, while the .5 moa floating dot allows for precise shot placement. Illuminated subtensions provide contrast between the reticle and target.

\*for 1-4.5x24: subtension valid @ 4.5x

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3
0.45	1.5	4	2	6	1.5
B4	C1	C2	D1	D2	
3	4	60	0.5	16	

**HELOS BTR GEN2**  
AHMR2 FFP IR MOA

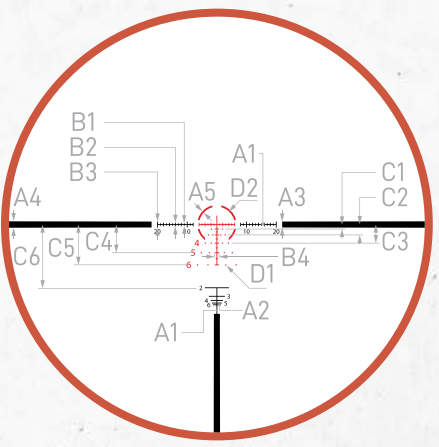


AHMR2 FFP IR MOA reticle is specifically designed for hunting and mid range application and the popular hunting caliber rifles with hold over points for both bullet drop compensation and wind holdover. The reticle is designed for you to zero your rifle a 100 yds center and use the bullet drop holdover up to 700 yds. The dots on horizontal lines below the center are specially designed for holding over for 5 mph and 10 mph wind. The ranging reticle down below is specially designed for ranging a deer body mass (from belly to the top of shoulder of a whitetail buck) from 200 yds to 600 yds. The illuminated center portion of the reticle provides great visibility during dusk and dawn low light conditions.

SUBTENSIONS IN MOA

A1	A2	A3	A4	A5	B1	B2	B3	B4
0.29	0.18	2	3	0.6	0.8	1.2	2	1.5
C1	C2	C3	C4	C5	C6	D1	D2	
1.5	3.5	6.25	9.5	13.6	21.5	0.45	12	

**HELOS BTR GEN2**  
APRS6 FFP IR MIL

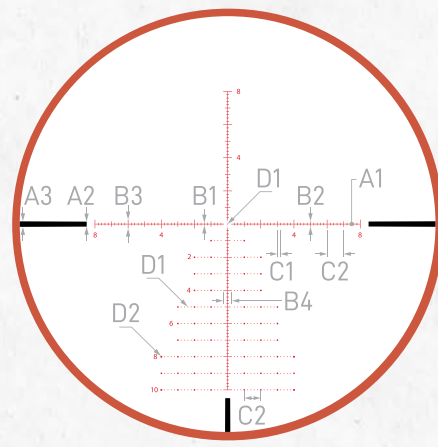


APRS6 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.033*	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	D1	D2	
0.4	0.2	1	0.05	0.1	

\*for 4-20x50: A1 = 0.05  
for 6-24x56: A1 = 0.033

**ARGOS BTR GEN2**  
ATSR5 SFP IR MOA

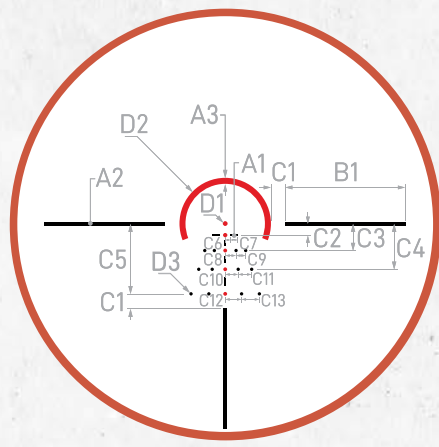


ATSR5 SFP IR MOA reticle is calibrated for a 68 grain Hornady and 69 grain Sierra cartridges, and suitable for any 5.56 Nato/.223 caliber rifle using a 200 yard zero. The 25 moa horizontal and lower 1/3rd crosshairs quickly draw the shooters eye to the illuminated 19 moa horseshoe and 1.4 moa center dot. The 19 moa horseshoe is designed to bracket a silhouette target at 100 yards. With a 200 yard zero, the precise .5 moa elevation holds compensate for 300, 400, 500, and 600 yards and 0, 5, and 10 mph winds.

\*for 1-8x24: subtension valid @ 8x

SUBTENSIONS IN MOA

A1	A2	A3	B1	C1	C2	C3	C4	C5	C6
0.3	0.8	1.25	25	3	2.4	5.6	9.5	14.6	1.07
C7	C8	C9	C10	C11	C12	C13	D1	D2	D3
1.5	2.25	2	2.7	2.8	3.4	3.7	1	19	0.7

**HELOS BTR GEN2**  
AHMR2 FFP IR MIL

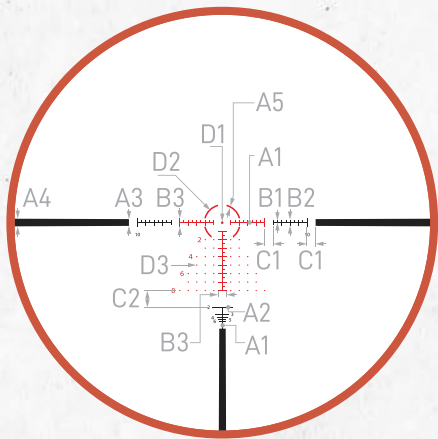


AHMR2 FFP IR MIL reticle is specifically designed for both hunting and shooting competitions. The 0.3 mil (1 moa) red dot is perfect for zeroing your rifle at 100 yards and the dots below the center red dot are for windage holdover with 0.5 mil increments. The center dot with 4 mil diameter circle provides quick aiming point at lower power and enough details for longer distance targets at higher power. The illumination of the reticle provides great visibility during low light conditions. The ranging reticle down below is specially designed for ranging a deer body mass (from belly to the top of shoulder of a whitetail buck) from 200 yds to 600 yds.

SUBTENSIONS IN MIL

A1	A2	A3	A4	A5	B1	B2
0.084	0.05	0.8	1.3	0.18	0.25	0.7
B3	C1	C2	C3	D1	D2	D3
1	1	2	2.5	0.3	4	0.15

**HELOS BTR GEN2**  
APLR6 FFP IR MOA

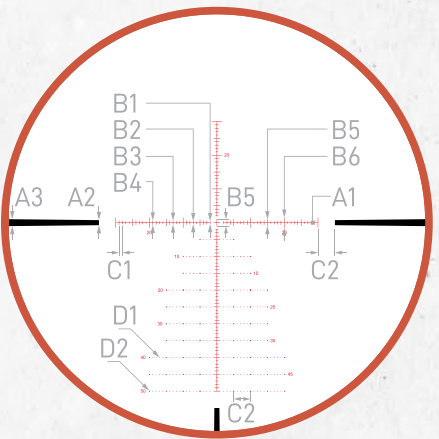


APLR6 FFP IR MOA reticle has a 2 moa floating center cross with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 40 moa in length at the 50 moa drop line. The unique design of having the floating center cross with 2 moa span in the middle provides little to none target obstruction for engaging small targets at long distances.

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3	B4
0.12*	1.5	2	0.7	0.9	1.1	1.3
B5	B6	C1	C2	D1	D2	
2	3	1	5	0.2	0.3	

\*for 4-20x50: A1 = 0.17  
for 6-24x56: A1 = 0.12

**ARGOS BTR GEN2**  
APLR2 FFP IR MOA

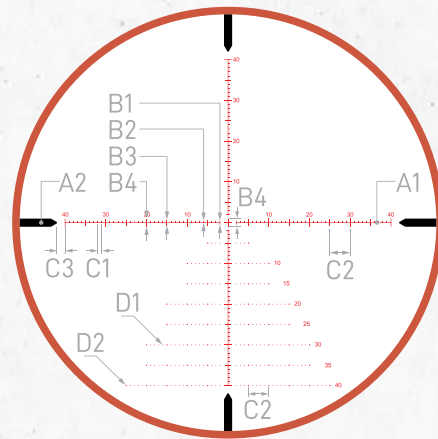


APLR2 FFP IR MOA reticle has a large illuminated center with 1 moa hash mark increments and drop lines in 5 moa increment on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The illuminated portion has a 2 moa span center cross with illuminated cross line extends to 40 moa on both vertical and horizontal direction. The unique design of having droplines going down to 40 moa with 5 moa between each drop line and 1 moa hash marks in between provide excellent hold over positions for long precision shooting.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

**ARGOS BTR GEN2**  
APMR FFP IR MIL

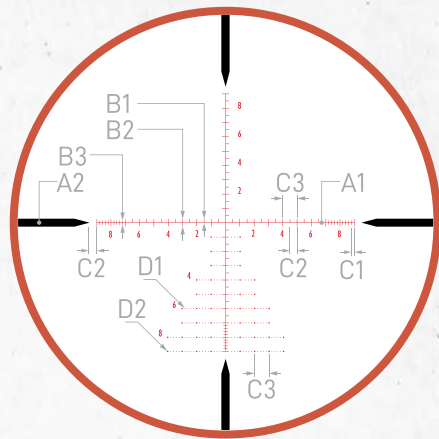


APMR FFP IR MIL reticle is designed to maximize your performance on long and mid-distance shooting with illuminated center cross and 0.5 mil hash mark, the APMR IR MIL reticle can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 18 mil span cross lines with 0.5 mil hash marks and 0.2 mil hash marks from 7 mil to 9 mil on three directions provide finer details that helps the shooter quickly locate the target and find a holdover position within higher level of precision and confidence.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.02	0.4	0.2	0.4	0.3
C1	C2	C3	D1	D2
0.2	0.5	1	0.05	0.1



**ARGOS BTR GEN2**  
BLR SFP MOA

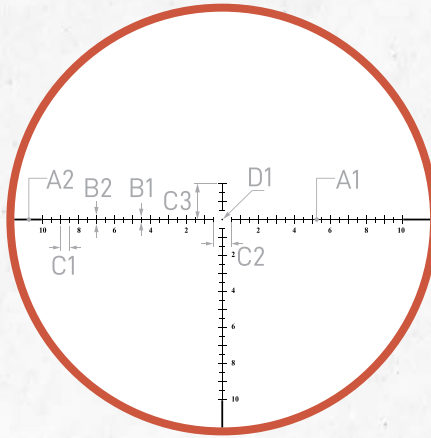


BLR SFP MOA reticle is designed to maximize your performance for both Bench Rest and F-Class shooting applications. Fine line thickness of the reticle (0.016 moa) allows for pinpoint precision at extreme ranges, especially on smaller targets. A non-illuminated floating center dot (0.09 moa thick) provides a precise aiming point. This reticle combined with the Argos BTR Rifle Scope provides the perfect solution.

\*for 10-40x56: subtension valid @ 40x

SUBTENSIONS IN MOA

A1	A2	B1	B2
0.016	0.1	0.3	0.5
C1	C2	C3	D1
0.5	1	2	0.09

**ARGOS HMR**  
BDC 500

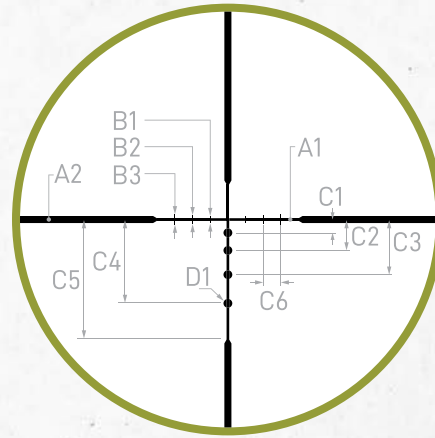


BDC 500 IR was designed to deliver a high level of precision at extended targets that can be used with today's most popular rifle cartridges.

\*for 2-12x42: subtension valid @ 12x  
for 4-20x50: subtension valid @ 20x

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1
0.3	0.8	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	D1
3.5	6.25	9.5	13.6	4	1

**ARGOS HMR / TALOS**  
MIL-DOT

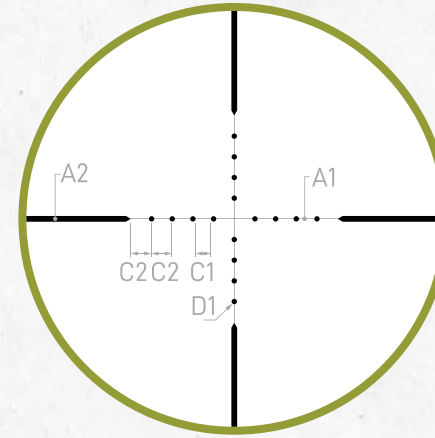


MIL-DOT reticle is one of the most accurate, versatile means of estimating ranges using a manual optical device. The MIL-DOT allows the user to do range estimations, holdover and wind drift compensation as well as for precise leads for moving targets.

\*for 4-20x50: subtension valid @ 20x  
for 3-12x40: subtension valid @ 12x  
for 4-16x40: subtension valid @ 16x

SUBTENSIONS IN MIL

A1	A2	C1
0.05	0.25	0.75
C2	D1	
1	0.25	

**TALOS BTR**  
APLR2 FFP IR MIL

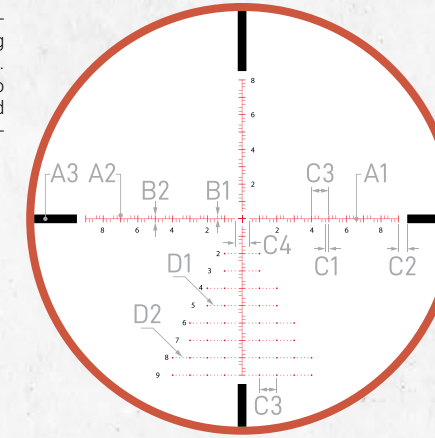


APLR2 FFP IR MIL reticle is designed to maximize your performance on precision long and mid range shooting with accurate ranging capability. It will help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark, having .2 and .4 on one side of either horizontal or vertical line and .6 and .8 on another side, helps the shooter quickly locate a holdover position with .2 mil increments within a blink of an eye. The illuminated fine reticle provides excellent low light visibility and windage holdovers on the bullet droplines all the way up to 9 mils with .2 mil marks increments between.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	C1
0.025	0.04	0.5	0.1	0.2	0.2
C2	C3	C4	D1	D2	
0.5	1	0.8	0.05	0.1	

**ARGOS HMR**  
BDC 600A IR

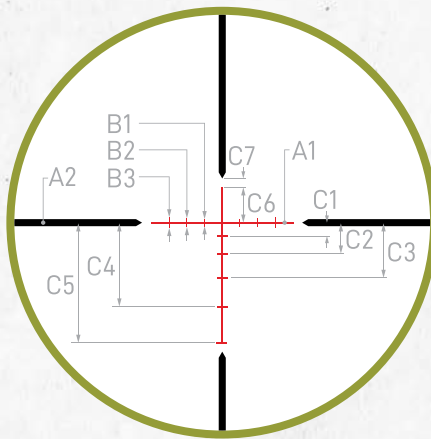


BDC 600A IR reticle can be used effectively with a variety of firearms giving your accurate ranges and reference marks which can be used to compensate for bullet drift in windy conditions or range distances. The user can sight in at 100 yards on any magnification setting, but for the ballistic reticle feature to function properly, the scope's magnification must be set to the correct power.

\*for 2-12x42: subtension valid @ 12x  
for 4-20x50: subtension valid @ 20x

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1
0.15	0.6	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	D1
3.5	6.25	9.5	13.6	4	1

**ARGOS HMR**  
AHMC SFP MOA

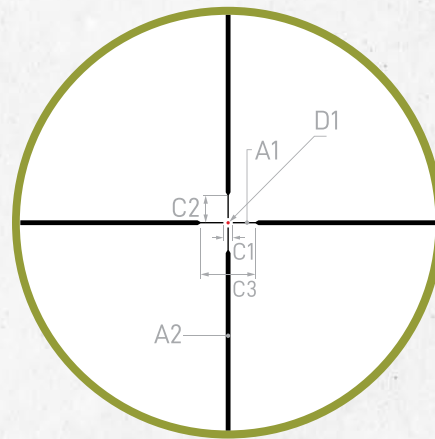


AHMC SFP IR MOA is a traditional hunting style reticle with an illuminated center-dot. The outside crosshair is bold, and prominently stands out against backgrounds that are tough to differentiate. It tapers down to a fine crosshair with a floating center-dot to reduce target obstruction, while drawing your eye to the center of the reticle.

\*for 2-12x42: subtension valid @ 12x  
for 4-20x50: subtension valid @ 20x

SUBTENSIONS IN MOA

A1	A2	C1
0.25	0.9	2
C2	C3	D1
6.5	13	0.7

**TALOS BTR**  
AHSR14 SFP IR MIL

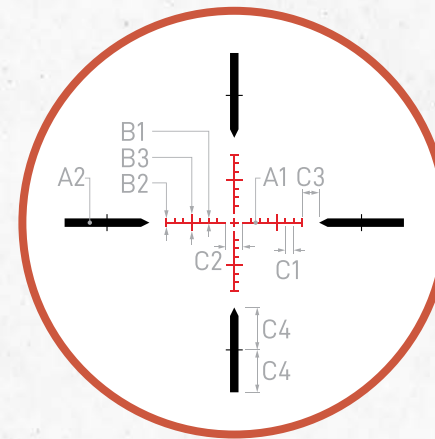


AHSR 14 SFP IR MIL reticle is designed to maximize your performance on short range shooting with illuminated 1 mil center cross and 1 mil hash marks increments extended to 8 mils on both horizontal and vertical directions and can help you quickly spot your target and set holdover positions and leads for a moving target. The illuminated 16 mil center with an 1 mil center cross (0.5 mil from center to the side) and 10 mil black lines enable a shooter to quickly locate the target and put it right on the center cross within a blink of an eye. The illuminated portion of the reticle provides excellent low light visibility.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.13	1	0.5	1	2
C1	C2	C3	C4	
1	2	2	5	

**TALOS**  
BDC 600 IR

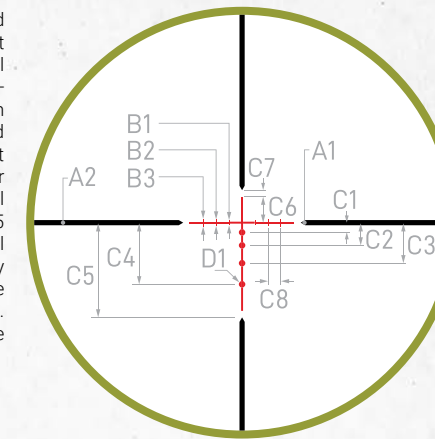


BDC 600 IR was designed to deliver a high level of precision at extended targets that can be used with today's most popular rifle cartridges.

\*for 3-12x40: subtension valid @ 12x  
for 4-16x40: subtension valid @ 16x  
for 6-24x50: subtension valid @ 24x

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1	C2
0.3	0.8	0.8	1	1.2	1.5	3.5
C3	C4	C5	C6	C7	C8	D1
6.25	9.5	13.6	4	1	2	1

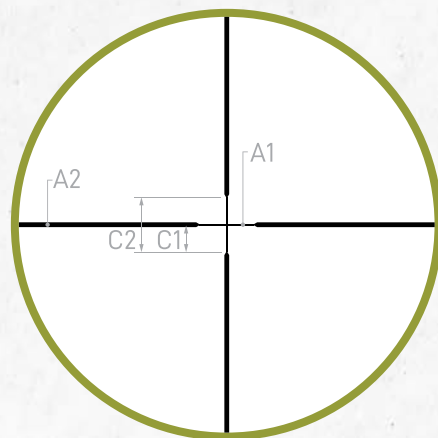
**TALOS / NEOS  
CENTER X**


**CENTER X** reticle is a perfect choice for shooters wishing to have a clear field of view with a more traditional crosshair. The Center X reticle allows shooters to quickly view their target while maintaining one distinct aiming point on their reticle. The heavy posts stand out nicely against cover and in twilight conditions, pointing boldly to the intersection.

\*for 3-9x40: subtension valid @ 9x  
for 3-12x40: subtension valid @ 12x  
for 4-12x40: subtension valid @ 12x  
for 6-18x40: subtension valid @ 18x

**SUBTENSIONS IN MOA**

MODEL	A1	A2	C1	C2
3-9x40	0.25	0.9	6.5	13
3-12x40	0.18	0.7	4.5	9
4-12x40	0.18	0.7	4.5	9
6-18x44	0.12	0.5	3.2	6.5

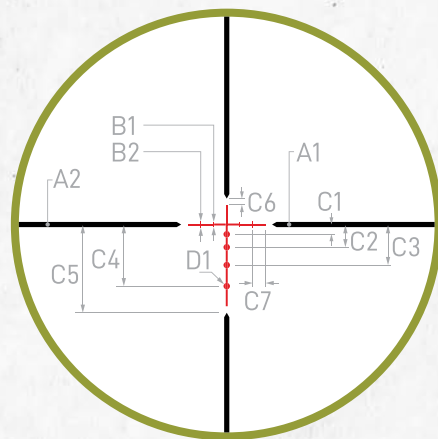
**NEOS  
BDC 500 IR**


**BDC 500 IR** was designed to deliver a high level of precision at extended targets that can be used with today's most popular rifle cartridges.

\*for 3-9x40: subtension valid @ 9x  
for 4-12x40: subtension valid @ 12x  
for 6-18x40: subtension valid @ 18x

**SUBTENSIONS IN MOA**

A1	A2	B1	B2	C1	C2
0.3	0.8	0.8	1	1.5	3.5
C3	C4	C5	C6	C7	D1
6.25	9.5	13.6	1	2	1

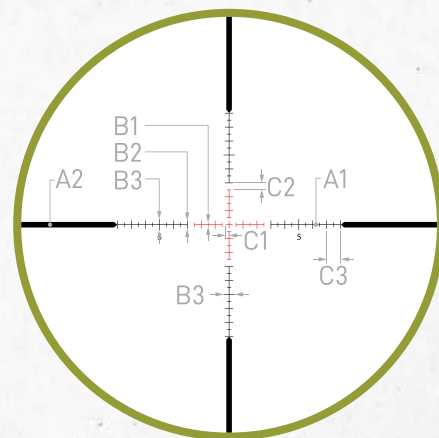
**TALOS  
ATMR1 SFP IR MIL**


**ATMR1 SFP IR MIL** reticle is perfect for shooting at the range or competing in a competitions. The customized mil hash mark design helps to eliminate any guesswork with holdover and windage adjustments. The illuminated reticle is great for low light situations when you need to count on a good, accurate shot.

\*for 6-24x50: subtension valid @ 24x

**SUBTENSIONS IN MIL**

A1	A2	B1	B2
0.02	0.5	0.3	0.6
B3	C1	C2	C3
0.8	0.25	0.5	1

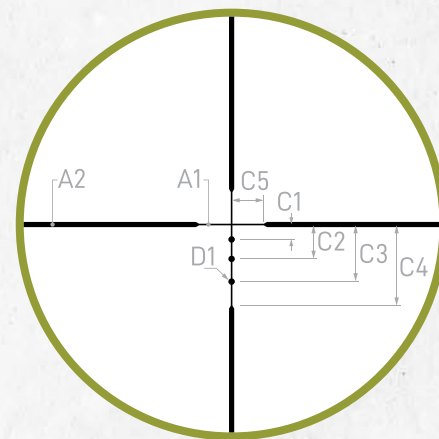**NEOS  
BDC 22 RIM FIRE**


**BDC22 RIM FIRE** reticle was designed specifically for rimfire. This reticle allows shooters to compensate for bullet drop at extended shooting distances. When using a .22 LR with a muzzle velocity of approximately 1,250 feet per second, this reticle is designed to be zeroed at 50 yards, providing bullet drop compensation for 75, 100, 125 and 150 yards.


\*for 3-9x40: subtension valid @ 9x  
for 4-12x40: subtension valid @ 12x  
for 6-18x40: subtension valid @ 18x

**SUBTENSIONS IN MOA**


A1	A2	C1	C2
0.25	0.8	2.3	5.3
C3	C4	C5	D1
8.8	12.5	5	1

**RED DOT SIGHT RETICLES**

When you need fast, effective, accurate, simple and reliable, Athlon Optics Red Dot family of products is just what you need. The Red Dot offers a bright red light for easy vision in all lighting situations. When the stakes are at their highest, whatever your needs are, trust your shot with Athlon Optics.

**MIDAS  
TSR1 - TSR2 - TSR3**

**SUBTENSIONS IN MOA**

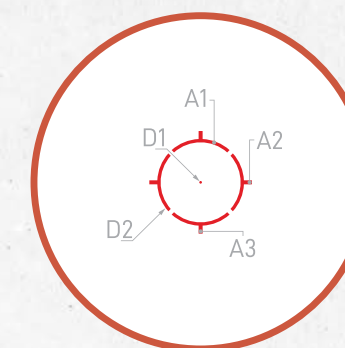
D1 (TSR1)	D1 (TSR2)	D1 (TSR3)
3	2	2

**MIDAS  
LE**

**SUBTENSIONS IN MOA**


A1	A2	A3	D1	D2
2.5	6	3	2	65

**PRISM SCOPE RETICLES**

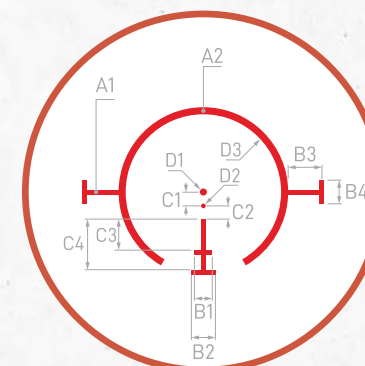
Designed specifically for fast target acquisition, Athlon Optics Prism Scopes are high performing, durable and reliable. Ideal for close to medium range shooting and rugged for any situation you may encounter.

**MIDAS  
TSP1 (RED/GREEN)**

**SUBTENSIONS IN MOA**

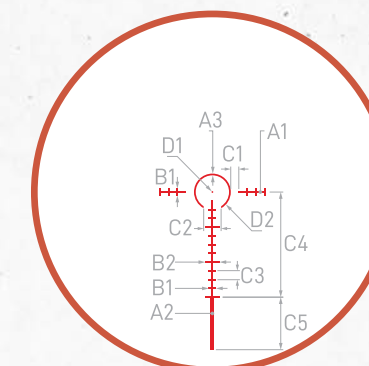A1	A2	B1	B2	B3	B4	C1
2	3	7.6	10.2	15	10	5.9
C2	C3	C4	D1	D2	D3	
5.6	13.2	22	3	2	66	

**MIDAS  
TSP3 (RED/GREEN)**

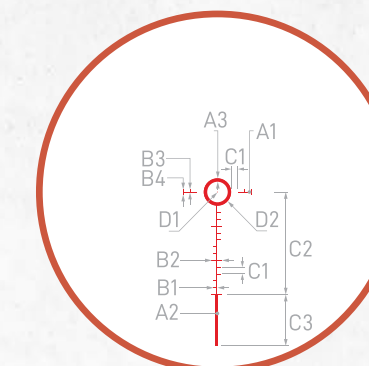**SUBTENSIONS IN MOA**

A1	A2	A3	B1	B2	C1
0.6	1.8	1	4	8	4.5
C2	C3	C4	C5	D1	D2
10	5	60	30	1	21

**MIDAS  
TSP4 (RED/GREEN)**

**SUBTENSIONS IN MOA**

A1	A2	A3	B1	B2	B3
0.45	1.5	2	2	6	1.5
B4	C1	C2	C3	D1	D2
3	4	30	60	0.5	16



## BINOCULAR HARNESS

The Athlon Optics Binocular Harness is the most functional, versatile binocular system in the market. It holds your binoculars tight to your chest, and is designed for quiet, one-handed use. With the multiple shoulder and neck adjustments, this allows the binocular harness to hold close to your chest and prevent sag and bounce when crawling or running. The harness allows for a full range of motion while the binoculars are in use.



### PRODUCT FEATURES



Water Proof Material



Quiet Material



Quick & Easy Access



Fits Most Binocular Sizes

### OTHER FEATURES

Fold-Down Lid Retention, Magnetic Closure for Quiet Access, 4 Point Harness for All Day Comfort, Internal Mesh Pocket, Vented Shoulder Straps, Layered Interlock Close Mesh Side Pockets

## PRECISION RINGS



DIAMETER	1"	30 mm	30 mm	30 mm
SIZE	MED	LOW	MED	MSR
HEIGHT	.9"	.868"	.993"	1.443"
DIAMETER	34 mm	34 mm	34 mm	
SIZE	LOW	MED	MSR	
HEIGHT	.944"	1.069"	1.519"	

## ARMOR SCOPE RINGS



DIAMETER	1"	30 mm	30 mm	30 mm
SIZE	MED	LOW	MED	MSR
HEIGHT	.9"	.89"	1.05"	1.443"
DIAMETER	34 mm	34 mm	34 mm	
SIZE	LOW	MED	MSR	
HEIGHT	.96"	1.16"	1.519"	

## SCOPE SUNSHADES

Cronus BTR GEN2, Ares ETR, Ares BTR GEN2, Midas TAC, Midas HMR, Midas BTR GEN2, Helos BTR GEN2, Argos BTR GEN2, Talos BTR riflescopes.

Black matte surface finish, 4.5 inches long, sizes in 56, 50, 44mm.



## AR TACTICAL CANTILEVERS



DIAMETER	30 mm	30 mm	34 mm
ANGLE (MOA)	0	20	20

## ARMOR CANTILEVERS



DIAMETER	1"	30 mm	30 mm	34 mm	34 mm
ANGLE (MOA)	0	0	20	0	20

## SEE WHAT EXPERTS SAY ABOUT OUR PRODUCTS

EXPERTVOICE TESTIMONIALS

### SURPRISED "SLEEPER BINOS"

#### NEOS G2 HD

"Compared to \$1000 binos it doesn't compare but for the money you can not beat the performance. I was surprised at the clarity of the sight picture I these binos were giving. The picture was clear from edge to edge and I could make out details on objects and animals at impressive distances. At the magic hour is when I could see that the higher quality binos were moving ahead. It's a steal for the people who are bird watching or just being the woods."

*Raynard Frank*

### LIVES UP TO THE HYPE!

#### HELOS BTR

"Great glass at a great price. Mounted on a .300 Win after bore sighting I was on paper and with 2 adjustments had 2 groups of 3 dialed in at 100 yards. Moving back to 200 made one adjustment and again 6 in the money. Wind kicked up but looking to go back to the range next week and see how it does at 500. Turrets have a great feel, and very impressed with the glass, clear and gathers light well. I hope it lives up to my initial impression as I would recommend and buy again!"

*Chris Johnson*

### VERY COMPETITIVE HIGH END OPTIC

#### CRONUS BTR UHD

"This optic without a doubt is Amazing! Very robust, FFP, endless adjustments, very clear glass "even while maxed out". For the price you can't get anything better!"

*Roy Oelschlager III*



### GREAT GLASS!

#### ARGOS UHD SPOTTING SCOPE

"Excellent glass. Went on a Wyoming Antelope hunt with this bad boy and was able to confirm bucks from a mile away."

*Johnathan Murillo*

### EXCELLENT BUDGET SCOPE

#### ARGOS BTR GEN2 RIFLESCOPE

"This may not have HD glass but function and performance is Amazing for the price. I'm am Getting groups measuring .463" With my AR build!"

*Steven Sendek*

### VERY IMPRESSED

#### CRONUS 15X56 BINOCULARS

"I would rank these binoculars up there with Vortex Kaibab and Leupold Santiam as far as clarity but the price is \$300 less. They are about the same size and weight as both mentioned. Used the warranty in the first week due to dropping them and tearing an eye cup and Athlon was great to deal with. Sent them in and had them back repaired and ready to go in 16 days."

*Casey Bell*



**WHEREVER  
YOUR ADVENTURE TAKES YOU  
WE'VE GOT YOUR BACK!**



801 N Meadowbrook Dr,  
Olathe, KS 66062

Toll free: 1-855-913-5678  
[contact@athlonoptics.com](mailto:contact@athlonoptics.com)

[www.athlonoptics.com](http://www.athlonoptics.com)