

Confidence in the toughest conditions.

ZEISS Sports Optics




ZEISS Hunting and Shooting Catalog



zeiss.com/us/sportsoptics

Seeing beyond

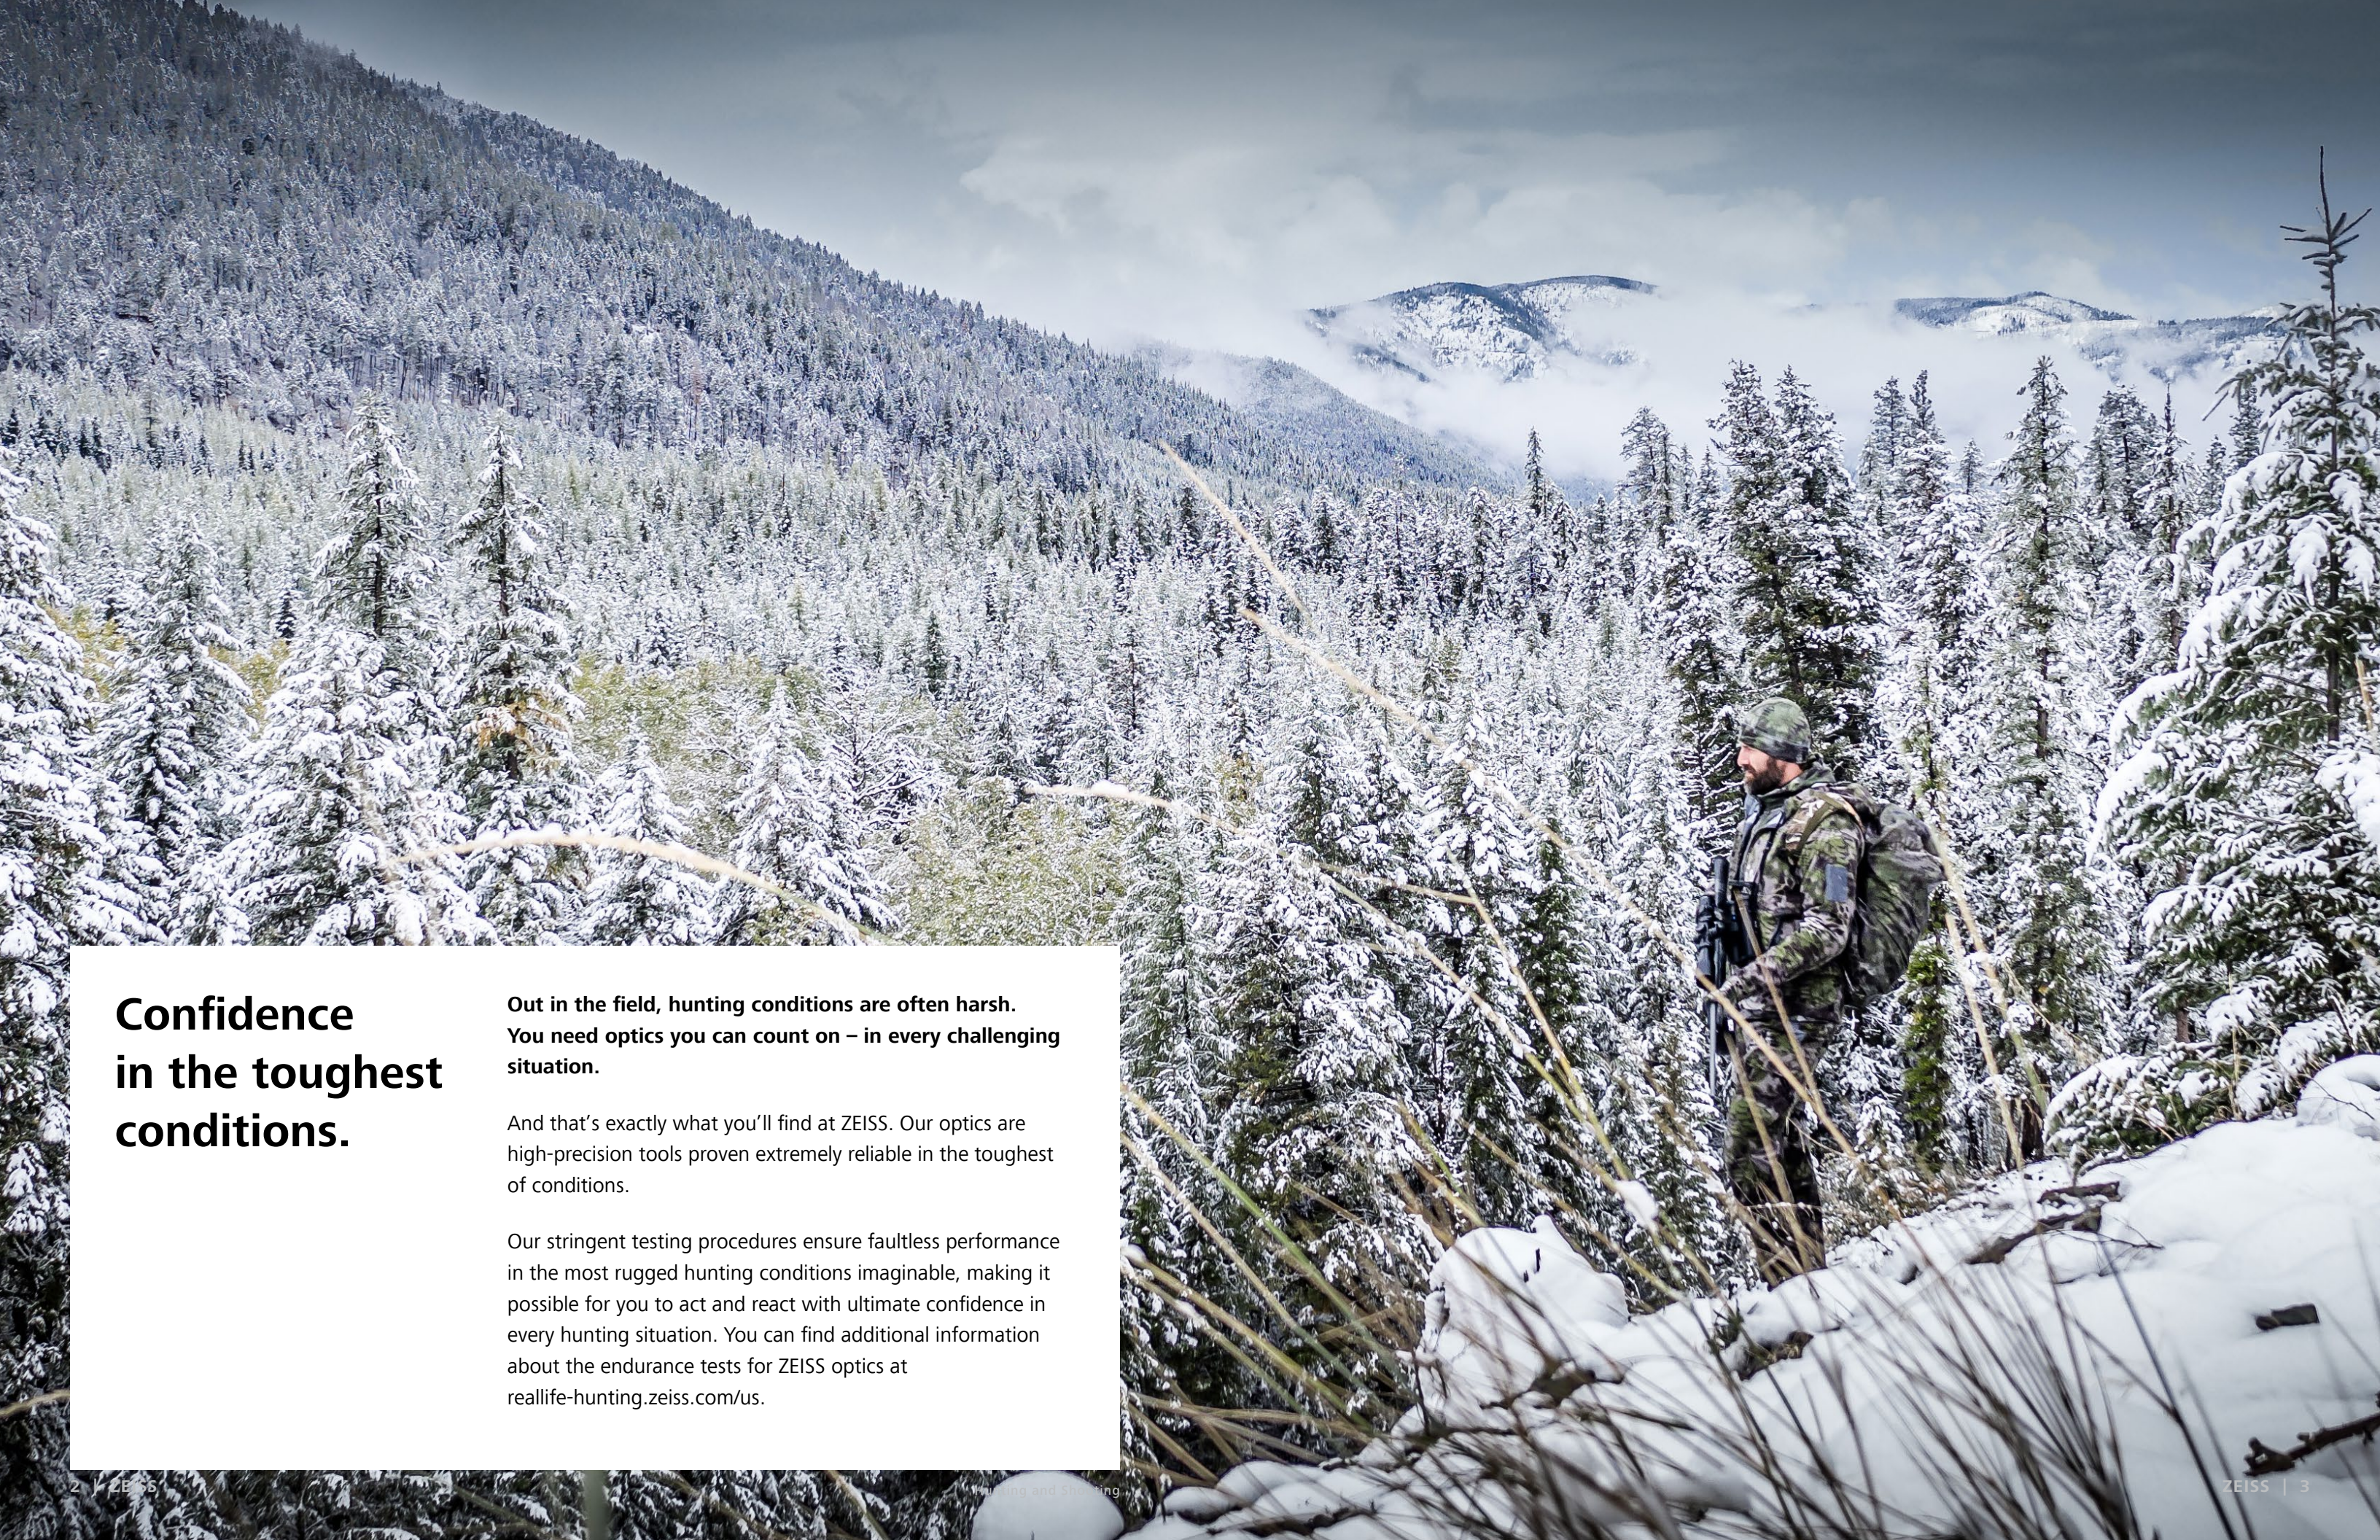A full-page background image showing a hunter in camouflage gear standing in a snowy forest. The hunter is looking through a rifle scope, with a bright light flare from the scope's lens visible in the foreground. The forest is covered in snow, and the background shows a mountain range under a cloudy sky.

Confidence in the toughest conditions.

Out in the field, hunting conditions are often harsh. You need optics you can count on – in every challenging situation.


And that's exactly what you'll find at ZEISS. Our optics are high-precision tools proven extremely reliable in the toughest of conditions.

Our stringent testing procedures ensure faultless performance in the most rugged hunting conditions imaginable, making it possible for you to act and react with ultimate confidence in every hunting situation. You can find additional information about the endurance tests for ZEISS optics at reallife-hunting.zeiss.com/us.



RIFLES
FROM ZEISS
16


ZEISS
HUNTING APP
14

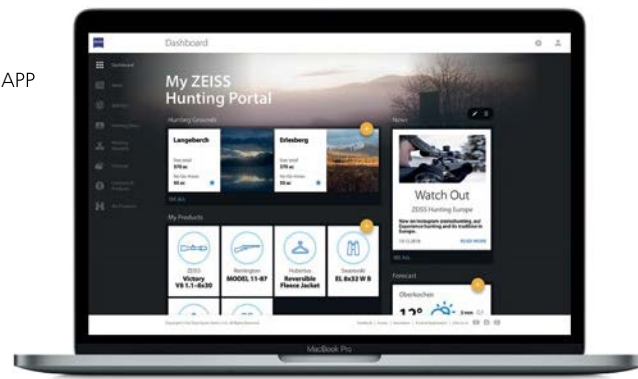

ZEISS PRECISION RINGS
62



RANGEFINDERS
AND BINOCULARS
FROM ZEISS
34

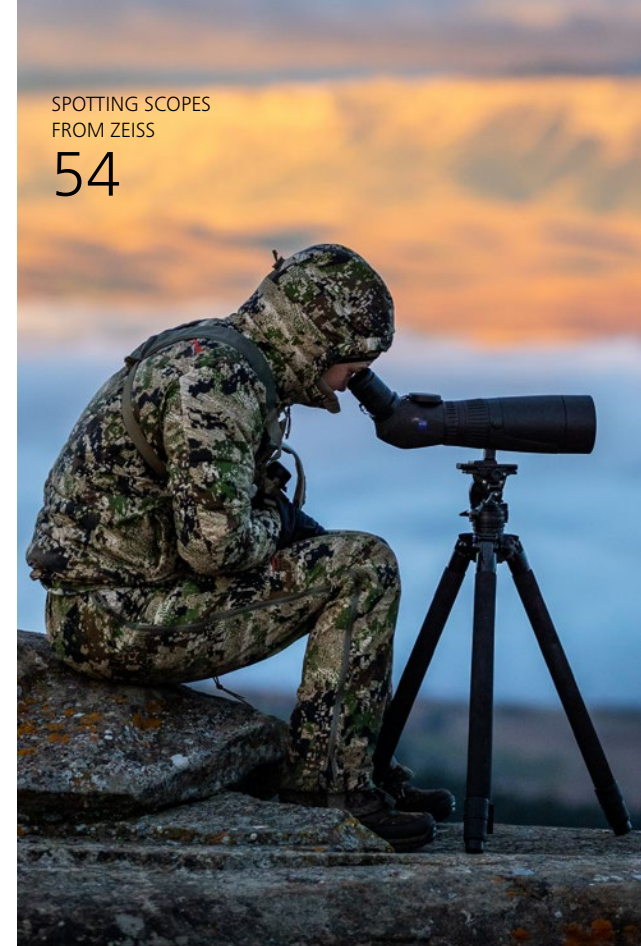

SPOTTING SCOPES
FROM ZEISS
54

ZEISS – The Company	6
ZEISS – Optics and Benefits	8
ZEISS – New for 2020	10
ZEISS – Hunting App	14
RIFLES	16
Victory V8	16
Conquest V6	22
Conquest V4	28

RANGEFINDERS AND BINOCULARS	34
Victory RF Rangefinder	34
Victory SF	40
Victory HT	44
Victory FL	45
Victory Pocket	45
Conquest HD	46
Terra ED	50
Terra ED Pocket	51

SPECIALTY BINOS/MONOS	52
Image Stabilization Binocular 20x60 S	52
Mono 3x12	53
Monoculars	53
SPOTTING SCOPES	54
Victory Harpia 95 / 85	56
Conquest Gavia 85	58
Dialyt Field Spotter	60

ACCESSORIES	62
Riflescopes	62
Binoculars	64
Spotting Scopes	66
Lens Care	67
SUPPORTING INFORMATION	68
Reticles	68
Technical Specifications	72
Product List and Order Numbers	80

SERVICE POLICIES	82
-------------------------	-----------

ZEISS Optics and Benefits Explained



Optical Innovation

Precision Mechanics



T-Star (T*) Six-layer Coating ^{Ti}

For a brighter, clearer and higher-contrast image.



SCHOTT Glass ^{SCOTT}

Optimum target identification, game validation, resolution of target and maximum light transmission in low-light hours.



Fluoride Glass ^{FL}

Ensures a brighter viewing image that delivers absolute color fidelity, brightness, high contrast and the finest resolution of details.




User-friendly Eyepiece ^{Eye}

The generous size of the eyepiece allows for more comfortable observation, a higher tolerance on where to place the eye, and faster target acquisition.



Ballistic Stop ^B

An absolute and ultra-positive return to zero – every time. Select your zero, set the Ballistic Stop, and enjoy a lifetime of repeatability.

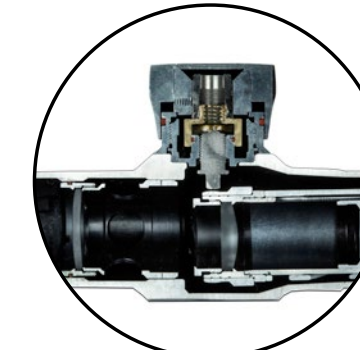


Lightweight Design ^{Light}

ZEISS products are engineered with select materials and manufactured to exacting standards to produce a lighter weight sport optic with a focus on precision and repeatability.



Lotutec® ^{Lot}

Makes lenses water- and dirt-repellent and easy to clean.

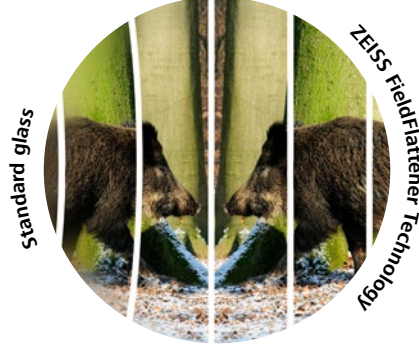

FieldFlattener Technology ^{FF}

Extreme edge sharpness, even with wide fields of view.



Light Transmission ^{LT}

90% to the eye with Conquest V4
92% to the eye with Conquest V6
92% to the eye with Victory V8

Hunting and Shooting



European-Style Fast Focus Eyepiece

Quick, easy and repeatable diopter adjustment.



Smart Reticle Design ^{Ret}

Various relevant and intuitive reticle designs for today's hunting and long-range hunting needs.



Illuminated Reticle ^{Ret}

Illuminated reticle keeps you in the hunt in prime time (optional).

NEW FOR 2020

ZMOAi-T20 and ZMOA-T30

New!

Thin Line Reticles

Designed for Long-Range Hunting and Precision Shooting.


- Thinner Reticle*
- Highly Intuitive
- Precise Aiming Solution

- Faster Target Engagement
- Second Focal Plane

*35-50% thinner than ZEISS ZMOA and ZBR series reticles

ZMOAi-T20

(Illuminated)

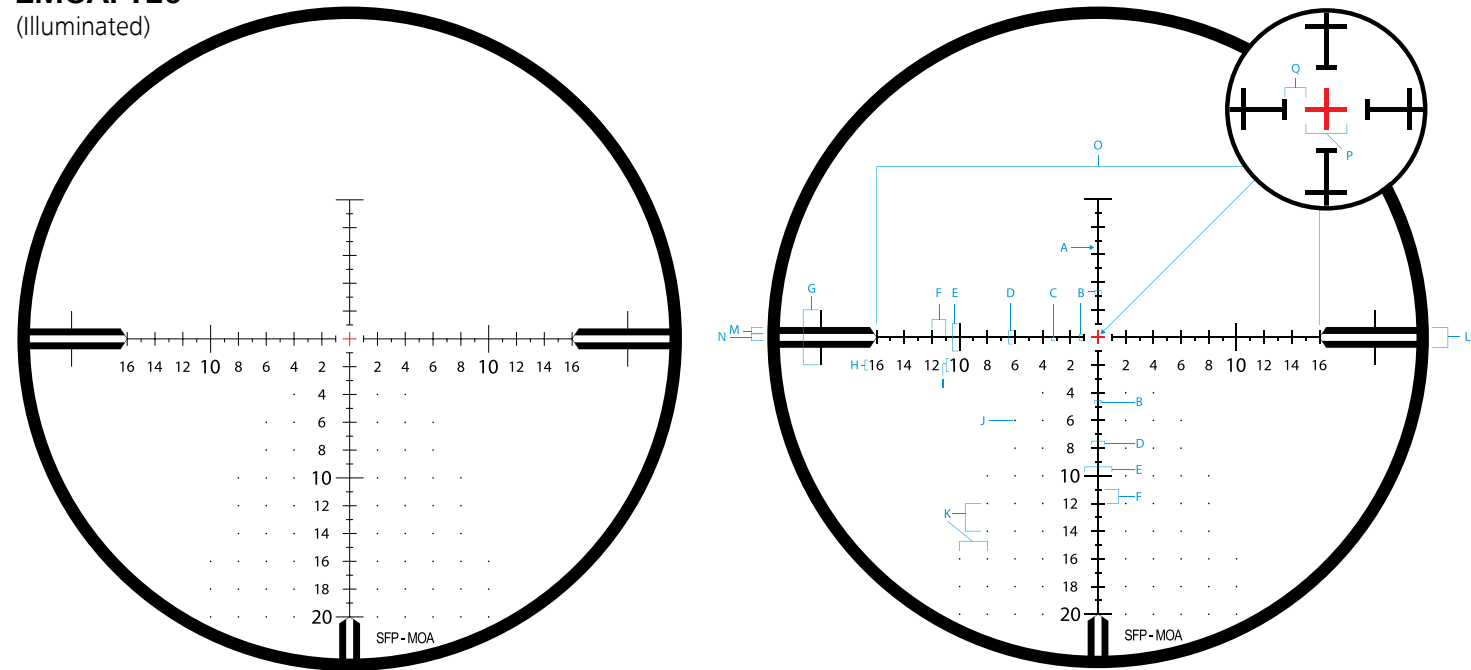

The **ZMOAi-T20 illuminated** reticle is available in the **Conquest V4 6-24x50**




RIFLESCOPE	CONQUEST V4 6-24x50
Magnification	@ 24x
UNIT OF MEASURE	MOA
Line Thickness A	0.06
Distance B	0.5
Distance C	0.25
Distance D	1.0
Distance E	2.0
Distance F	1.0
Distance G	4.0

Standard Number Height H	0.75
10, 20 Number Height I	1.0
Dot Size J	0.12
Dot Spacing K	2.0
Distance L	1.5
Distance M	0.5
Distance N	0.5
Distance O	32
Distance P	1.0
Spacing around center cross Q	0.5

ZMOA-T30

(Non-Illuminated)

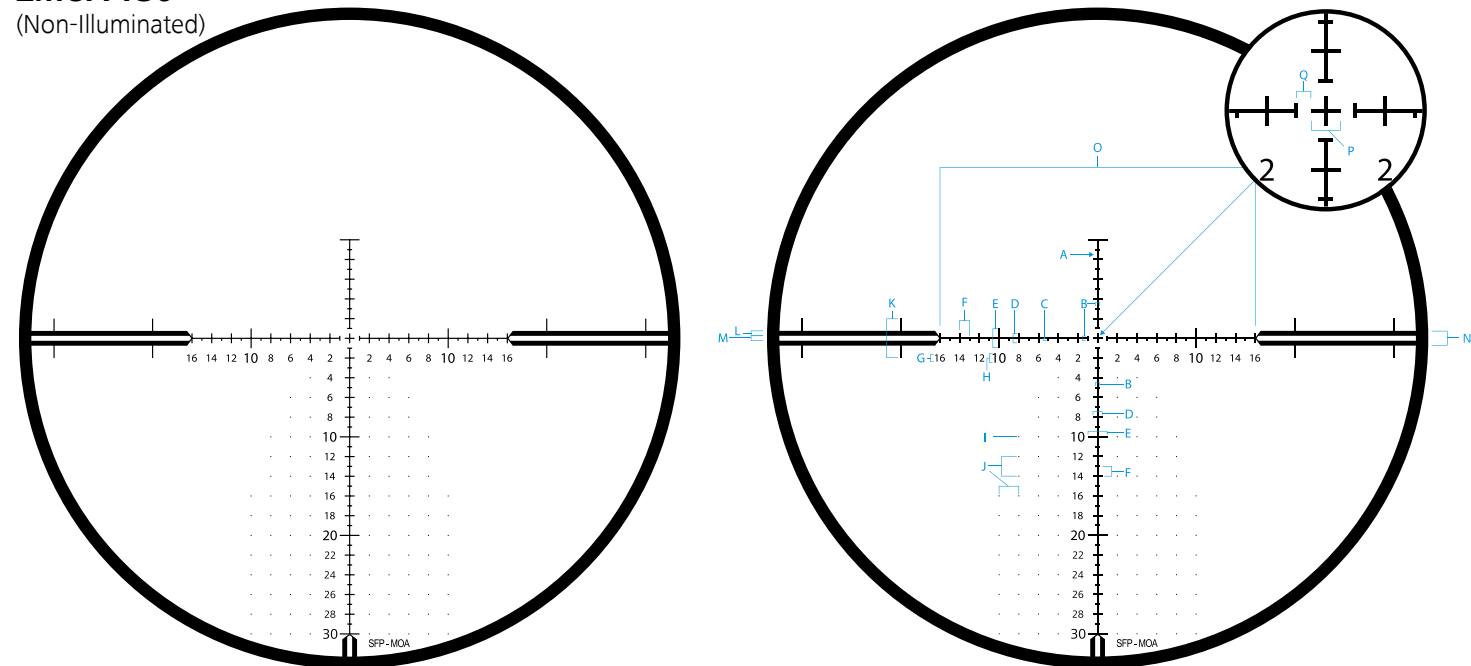

The **ZMOA-T30** reticle is available in the **Conquest V4 4-16x44**



RIFLESCOPE	CONQUEST V4 4-16x44
Magnification	@ 16x
UNIT OF MEASURE	MOA
Line Thickness A	0.12
Distance B	0.5
Distance C	0.25
Distance D	1.0
Distance E	2.0
Distance F	1.0
Standard Number Height G	0.75

10, 20, 30 Number Height H	1.0
Dot Size I	0.12
Dot Spacing J	2.0
Distance K	4.0
Distance L	0.5
Distance M	0.5
Distance N	1.5
Distance O	32
Distance P	1.0
Spacing Around Center Cross Q	0.5



NEW FOR 2020

New!

ZEISS Precision Rings with Integral Anti-Cant Bubble Level

ZEISS ultralight 1913 Mil-Std, STANAG-compliant rings are manufactured to the highest of standards, from premium materials, and with tight tolerances for your long-term safety and field applications. They are designed for optimal long-range shooting solutions and allow for either right- or left-handed operations as well as eye dominance. The bubble level is easily viewed from the shooting position, creating no disturbance in your shooting position. A smarter, sleeker, and ultralightweight ring design for all heavy-duty hunting and shooting applications.

Bubble Level


Integral anti-cant bubble level in top half of ring.

Durable Material

7075-T6 aluminum, Mil-Std, STANAG-compliant, Type III, 30-micron hard anodized finish – matte black.

Cap Screws

T15 Torx®, Type 303 stainless steel top cap screws – with black oxide finish.

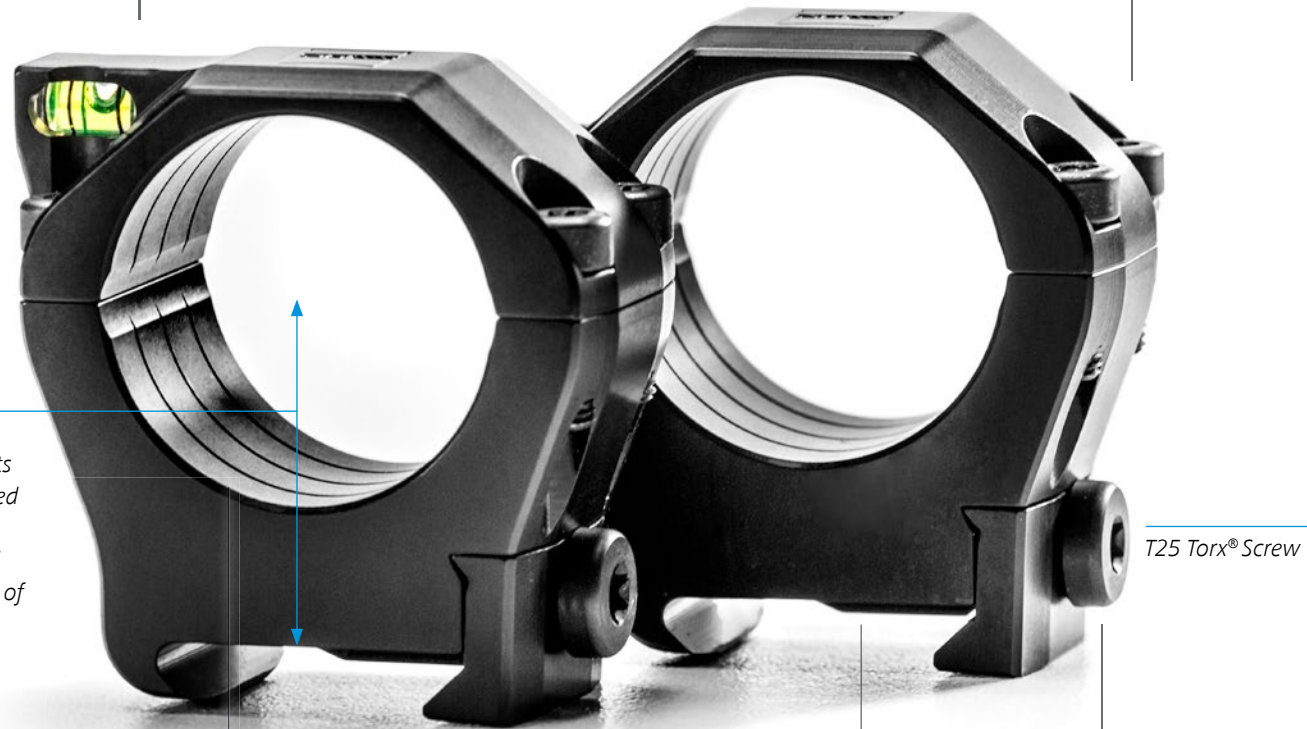

Ring height measurements are determined from top of mounting rail to center line of ring's bore.

T25 Torx® Screw

Machined Leading Edges

Micro-radiused on all machined leading edges to ensure a non-marring design.

Ultralight

Approximately 4.4 oz. with screws (pair 30mm low).

Recoil Lug

Integral bottom recoil lug for best alignment and a secure zero under the harshest recoil.

Refined Design

Compact and refined design, with low-profile, non-snagging hardware.



Hard Case

Included, with both T15 and T25 Torx® driver bits

Image displayed above represents a 30 mm medium-height ring.



The App for expert hunters and shooters.


Now available from your desktop.





Multi-talented hunting buddy


The ZEISS Hunting App supports over 100,000 hunters and shooters around the world with its many useful features. The ZEISS Hunting App is always ready to capture current events or experiences while you are afield.


The new desktop version offers more convenience for data entry and provides an additional portal for data management and documentation. Automatic synchronization ensures that data entries are always available on all devices.


 **ZEISS Hunting App – now available from your desktop.**

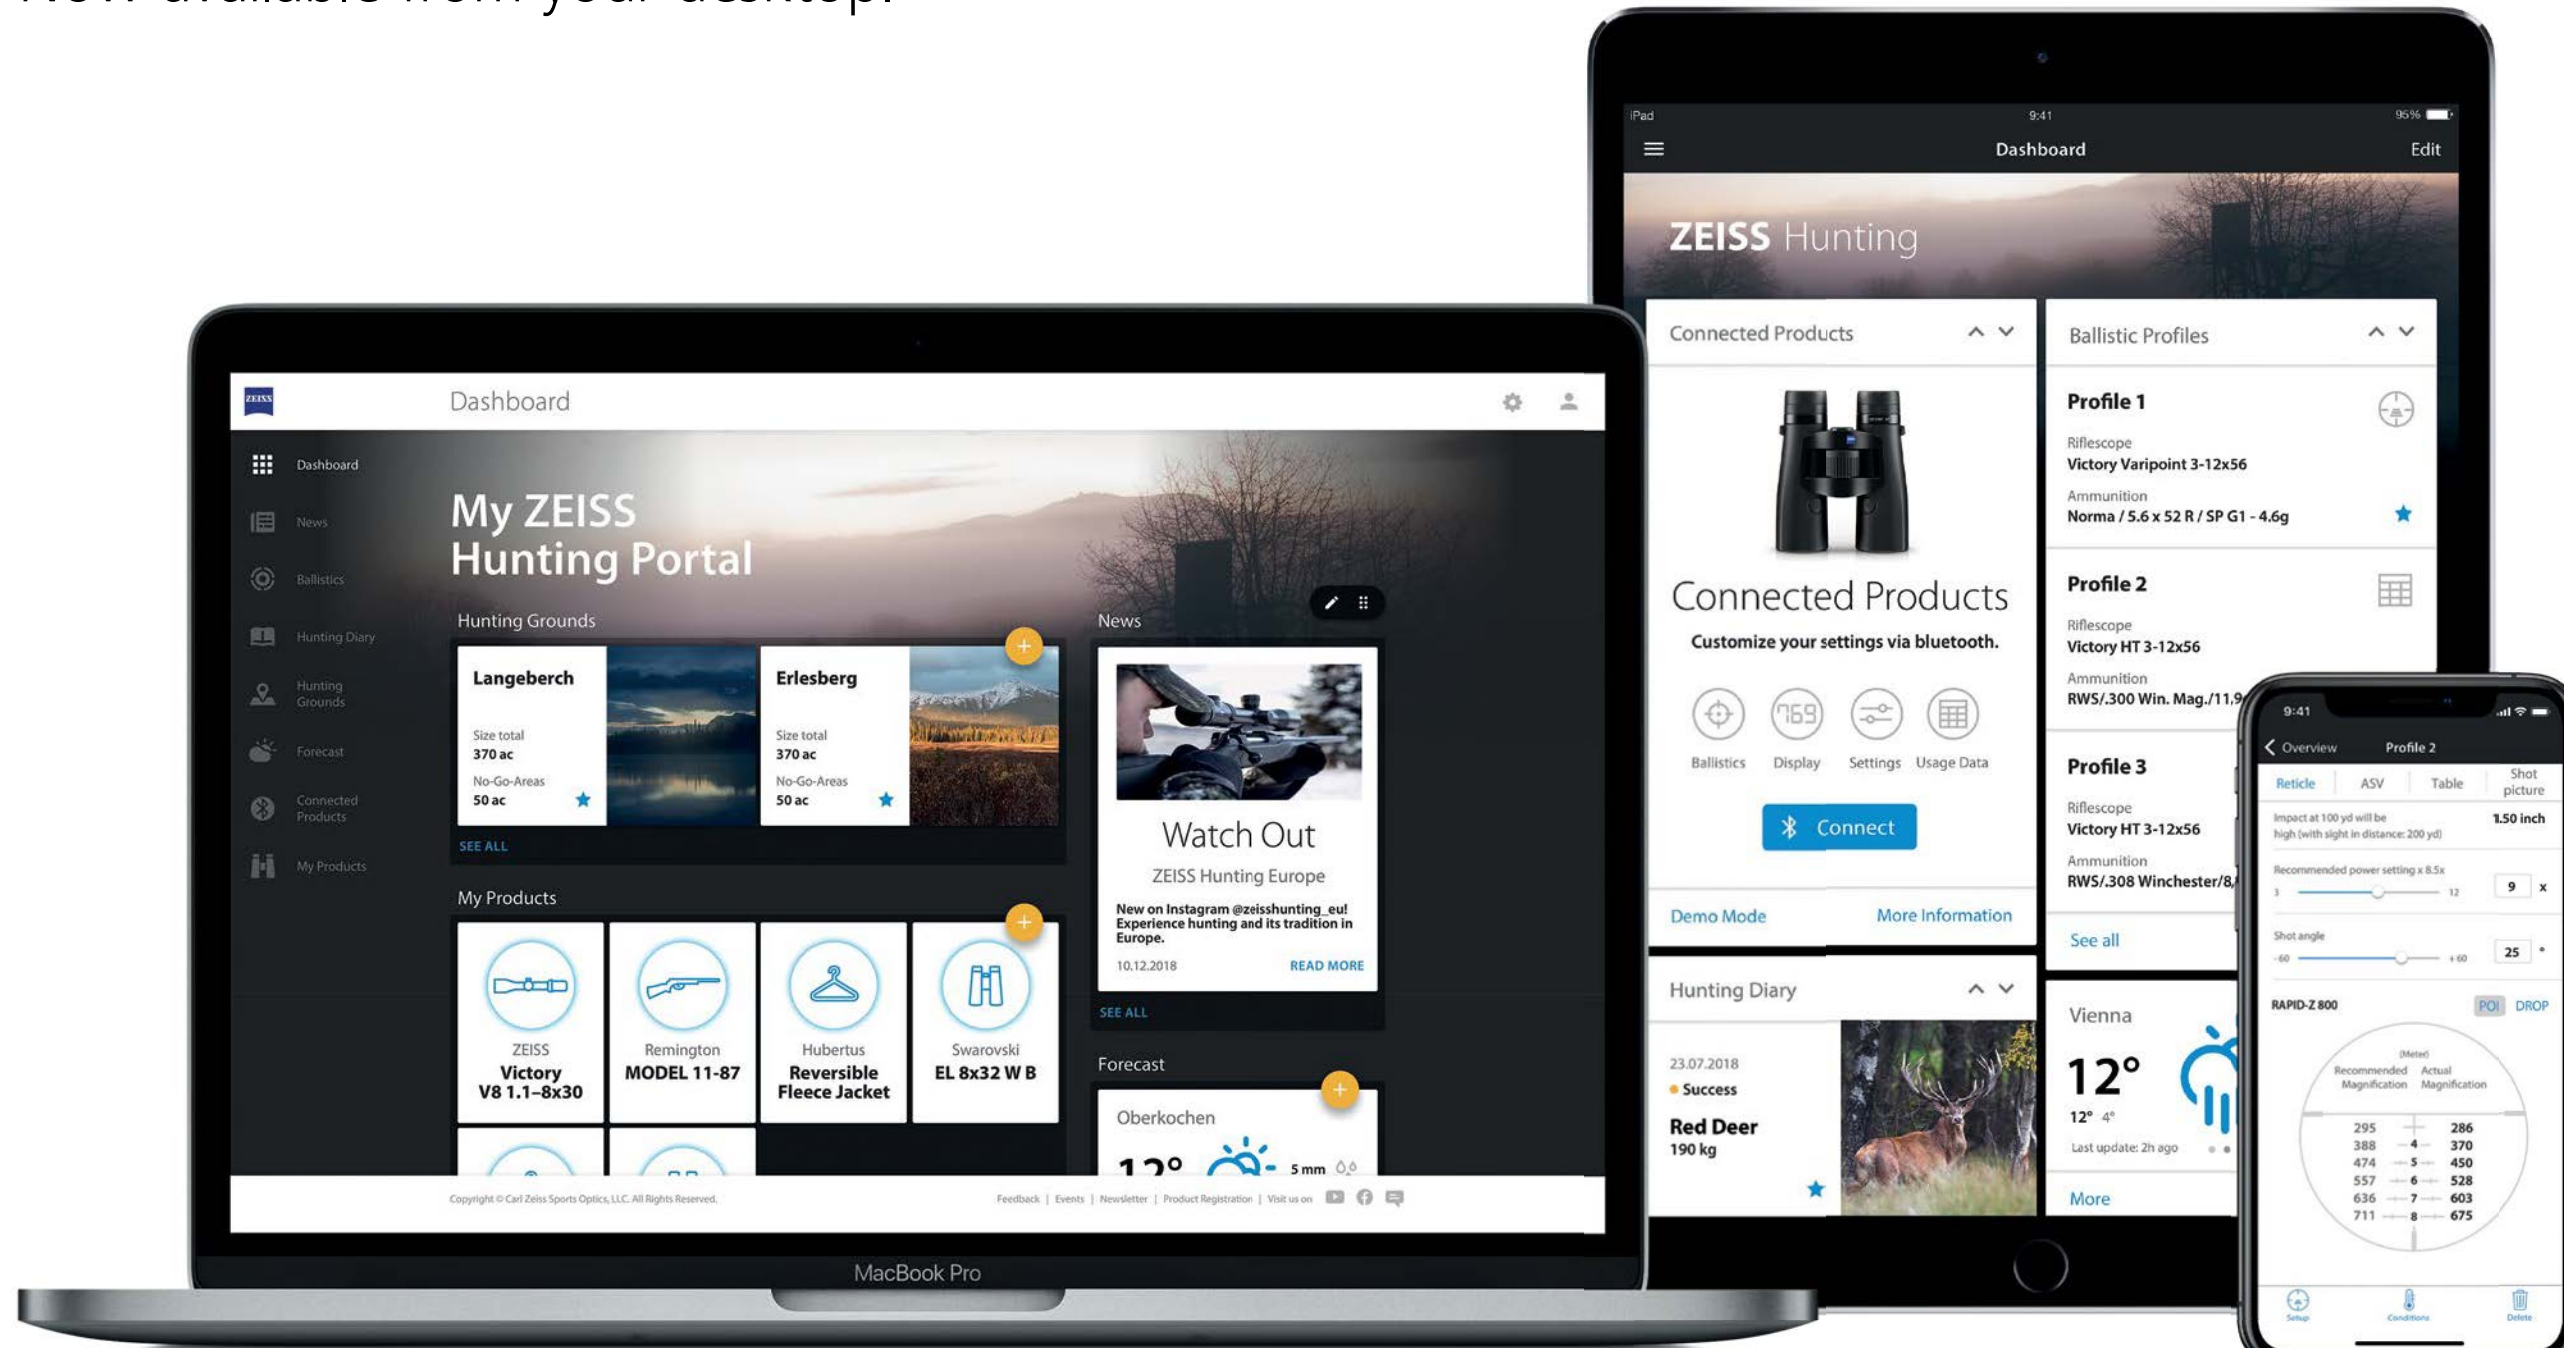



 **Connected Products**
Easy setup and configuration of the ZEISS Victory RF Rangefinder through the App. Sync your custom ballistic profiles to ensure precise shot placement.

 **Hunting Grounds**
Create, manage and outline your hunting grounds directly from your desktop or smartphone. Mark stand locations and other important areas on the map. Never get lost in the field, thanks to the GPS-powered indicator of your current location.


 **Dashboard**
Provides a quick overview of the information you use most often.

 **News**
Product news, promotions and sweepstakes – an exclusive just for ZEISS Hunting users.

 **Field Notes**
Document your hunting experiences by adding species, shot placement, photos/videos and much more.

 **Weather Data**
Weather forecast and real-time location data for your hunting grounds.

 **My Gear**
Organized record-keeping of your hunting gear. Important product information securely stored in one place and always at your fingertips.

 **Ballistic Calculator**
Precise calculations for the perfect shot. Includes an ammunition database with over 7,000 loads.

ZEISS VICTORY V8 RIFLESCOPES

The uncompromising pursuit of perfection.

Hunting leaves no room for compromises. This is why dedicated hunters around the world trust in ZEISS Victory® V8 – the most versatile riflescopes from ZEISS.















It is the sum of sophisticated features and how they work together that makes riflescopes from ZEISS an indispensable hunting companion; scanning the landscape delivers an image in extraordinarily sharp detail, outstanding brightness and natural color rendition. This is made possible only by the unique interaction of transmission values of up to 92%, FL lenses, SCHOTT HT glass and extremely wide fields of view.

The Victory V8 riflescopes also offer superb ergonomic handling. For instance, the world's finest and brightest illuminated dot can be precisely adjusted and easily set, while the short and compact construction ensures optimal firearm handling. In addition, the large, generous eyepiece ensures fast target acquisition and round, clear images at all powers. Their long-range hunting capabilities are another unique feature of the V8 riflescopes. Thanks to the BDC (ASV) and its large adjustment range, the ZEISS Victory V8 stands at the pinnacle of modern riflescope technology.



FEATURES:

Intelligent innovations for exceptional results:


-  SCHOTT Glass
-  Fluoride Lenses (FL)
-  T* Six-Layer Lens Multi-Coating
-  LotuTec
-  92% Light Transmission
-  2nd Focal Plane
-  8x Zoom
-  Waterproof up to 400 mbar
-  Nitrogen Purged
-  Illuminated
-  Capped Turret
-  External Turret
-  Ballistic Stop
-  36 mm Main Tube

PRODUCT HIGHLIGHT


Victory V8

The **most versatile** riflescope from ZEISS.

RETICLE OPTIONS:



#60 Illum.



#43 Illum.

Larger Eyebbox

Achieve fast target acquisition and round, clear images at all powers, thanks to a large eyebbox and maximum field of view.

Parallax Compensation

Parallax compensation in all high-magnification models delivers ultra-crisp images at all distances.

Performance-Oriented Design

The 36 mm main tube diameter provides more room for optical excellence and generous reticle adjustment ranges.

More Powerful

The combination of 92% light transmission, FL lenses and SCHOTT HT glass provides the most outstanding image quality in the super-zoom riflescope class.



Cutting-Edge Technology

The multifunction button controls the brightness of the fine, illuminated red dot, and the intelligent motion sensor automatically activates the illumination when the rifle is brought into shooting position.

More Versatile

8x zoom for maximum flexibility: whether you are competition shooting, stand hunting, spotting and stalking game, or taking long-distance shots – with the ZEISS Victory V8, you are perfectly prepared for any hunting situation.

More Precise

With an adjustment range of 100 clicks, the BDC/ASV allows for precise, accurate long-range shooting.



V8 1-8x30

The V8 1-8x30 is considered the most powerful close-range riflescope. At 1x magnification, it is ideal for target acquisition with both eyes open, as well as quick shots at short distances. At 8x magnification, the V8 allows for shots at mid- to longer-range distances.

- Close range to longer distances
- Large, generous eyepiece
- 92% light transmission
- Reticle: #60 (illuminated reticle)
- Available with ZEISS rail mount.

Firearm Application



Target Usage Application




V8 2.8-20x56

The 2.8-20x56 opens up more opportunities at low light. 92% light transmission ensures bright, high-contrast images. This model is compact and easy to use, making it the perfect match for even the highest performing rifles.

- Low-light specialist
- 92% light transmission
- BDC/ASV LongRange standard
- Reticle: #60 (illuminated reticle)
- Available with ZEISS rail mount.

Firearm Application

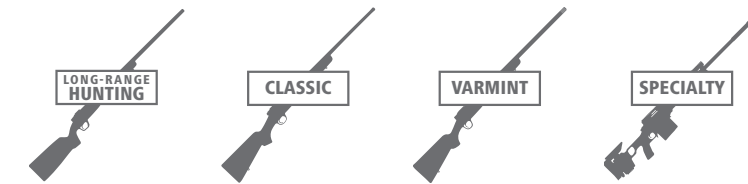

Target Usage Application




V8 1.8-14x50


This compact model provides a wide range of possible uses and maximum accuracy at any distance. The large eyepiece ensures fast and reliable shots in any situation – from spotting and stalking game to stand hunting at twilight.

- Most versatile riflescope
- 92% light transmission
- Optional BDC/ASV LongRange
- Reticle: #60 (illuminated reticle)
- Available with ZEISS rail mount.

Firearm Application

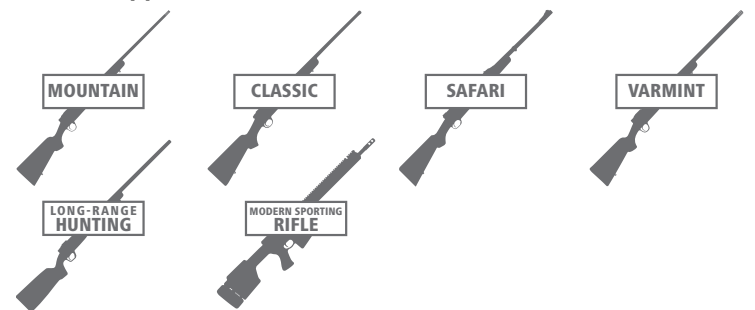

Target Usage Application

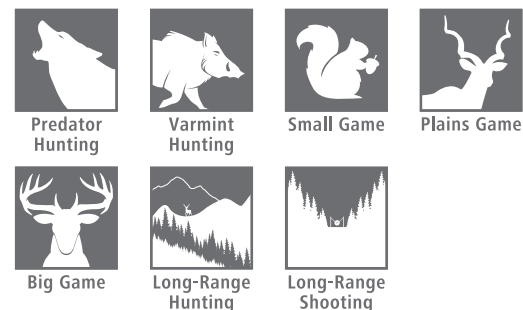

V8 4.8-35x60

The benchmark model of the Victory V8 product line. The 35x magnification combined with the BDC/ASV gives ultimate long-range hunting capability. The optical system impresses with maximum detail resolution, thanks to its combination of SCHOTT HT glass and fluoride (FL) lenses.

- BDC/ASV LongRange standard
- 92% light transmission
- Reticles: #43 (illuminated reticle) / #60 (illuminated reticle)

Firearm Application



Target Usage Application



ZEISS CONQUEST V6 RIFLESCOPES

Exceptional Optics. Outstanding Performance. Truly Lightweight Design.

Since the introduction of these riflescopes in 2017, ZEISS has established a new standard of design, quality and function. The ZEISS Conquest® V6 riflescopes are designed, engineered and manufactured in Germany, and each offers leading-edge optical and mechanical technology.

These riflescopes will impress you at each turn, whether hunting or shooting, on low power or in low light, on high power or high on the mountain. The true 6x zoom delivers ideal power ranges and allows ZEISS to offer three models: 1-6x24, 3-18x50 and 5-30x50 configurations. ZEISS offers several second focal plane reticle options, to include plex-style as well as MOA-based smart reticle designs.

If your adventures take you hunting or shooting in the dense canopy of the Southeast or the rolling mountains of the Northeast, consider the 1-6x24 or the 3-18x50. If you are traversing the farmlands and river bottoms of the Midwest, the highly versatile 3-18x50 is your perfect hunting companion. If you've made it to the open fields and rugged mountain ranges of the West and want to stretch your barrel for that long-range opportunity, the 5-30x50 is the ticket to a successful shot of a lifetime.

The 30 mm main tube houses a premium optical platform that delivers outstanding to-the-eye light transmission of 92%. ZEISS fluoride (FL) lenses and SCHOTT glass, when coupled with advanced T* multi-layer light transmission coatings, ensure that the ZEISS Conquest V6 provides outstanding image quality and clarity every time. The objective and ocular lenses are also treated with ZEISS LotuTec hydrophobic coatings to repel dirt, debris and water.

Additionally, the 1-6x24 model offers digital reticle illumination with an intelligent motion sensor to help conserve battery life, and it allows you to program and set your preferred level of illumination intensity. There are options for external or capped elevation and windage turrets, depending on model, with elevation and windage adjustment ranges up to 103 MOA. Finally, external elevation turrets incorporate ZEISS proprietary Ballistic Stop feature, which ensures an absolute return to zero – every time.

The Conquest V6 models are backed by the ZEISS Limited Lifetime Transferable Warranty and Five-Year No-Fault Policy.

FEATURES:

Intelligent innovations for exceptional results:


-  SCHOTT Glass
-  Fluoride Lenses (FL)
-  T* Six-Layer Lens Multi-Coating
-  LotuTec
-  92% Light Transmission
-  2ND 2nd Focal Plane
-  6x 6x Zoom
-  400 MBAR Waterproof up to 400 mbar
-  N₂ Nitrogen Purged
-  Illuminated
-  Lightweight
-  Capped Turret
-  External Turret
-  Multi-Turn Turret
-  B Ballistic Stop
-  1/4 MOA
-  1/2 MOA
-  30 mm Main Tube

PRODUCT HIGHLIGHT

Conquest V6

The **powerful scope** for wide-open terrain.

RETICLE OPTIONS:

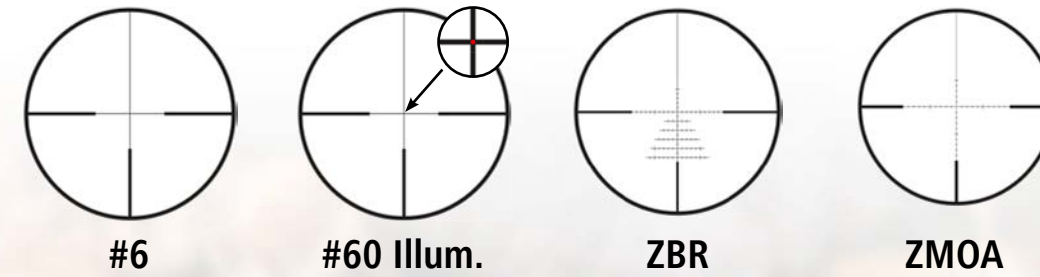

True 6x Zoom

Powerful magnification with a true 6x zoom ratio provides more versatility across a wide range of applications.

Fast and Precise

The external turret – with .25 MOA click adjustments (.50 MOA on 1-6x24), Ballistic Stop feature, multiple revolutions and 80 clicks per rotation – allows you to engage and stay on target, even at the longest of distances.

Made in Germany

Extremely reliable internal components and legendary precision mechanics ensure consistent and flawless operation for decades.

Industry Leading

Optical Performance
SCHOTT glass, FL lenses, enhanced T* multi-coating and LotuTec hydrophobic coating produce 92% light transmission and excellent target resolution across the entire magnification range, even in extreme low-light situations.



VERY Generous Eyebx

Setting up your shot has never been easier, thanks to the large, generous and forgiving eyebx. Once you position yourself behind the riflescope, you will experience the reticle, target and full image faster.

Large Adjustment Range

The 30 mm single-piece, machined, aircraft-grade aluminum tube is extremely rugged. The machined shoulder design also allows for 62-103 MOA total elevation adjustment, depending on model, for long-range hunting and shooting.

Second Focal Plane Reticle Options

In addition to the plex-style #60 illuminated reticle (fiber optic, fine red dot) and the plex-style #6, ZEISS offers the ZBR and ZMOA ballistic reticles, which are MOA-based smart reticles. All options feature fine crosshairs in the second image plane to ensure minimum target coverage and maximum visibility.

ZEISS Conquest V6

The high performance riflescope with a 6x zoom range.




V6 3-18x50

The most versatile of the V6 product line, this riflescope with 103 MOA elevation and 58 MOA windage adjustment is built to excel at mid- to long-range shooting distances. It is the perfect scope for the mobile Western hunter in pursuit of elk, mule deer, antelope or mountain sheep.

- Multi-turn elevation turret with Ballistic Stop (absolute and positive return to zero)
- True 92% light transmission provides exceptional resolution and accuracy
- ZEISS FL lenses, enhanced T* coatings and LotuTec coating
- Side parallax adjustment
- Reticles: ZBR-2 / ZMOA-2 / #6 (plex)

Firearm Application

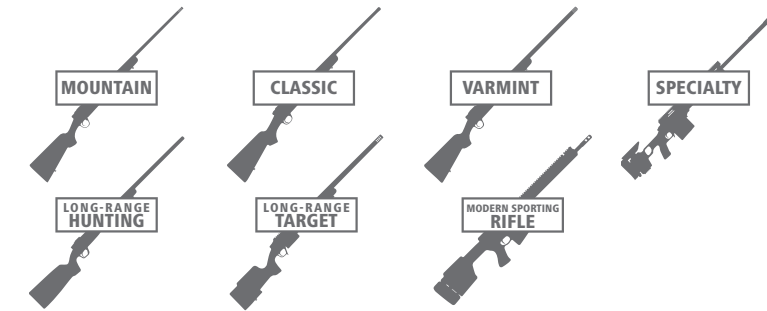

Target Usage Application




V6 1-6x24

With true 6x magnification, this model is built for extremely fast target acquisition. The large, generous eyepiece, combined with a wide field of view, makes it extremely versatile in close encounters, from dense cover and 3-Gun competitions to mid-range hunting conditions in open terrain.

- Lockable external turret option with Ballistic Stop feature (absolute and positive return to zero)
- Large, forgiving eyepiece
- ZEISS FL lenses, enhanced T* coatings and LotuTec coating
- Intelligent motion sensor activates/deactivates illuminated red dot
- Reticles: #60 (plex) / ZMOA-4

Firearm Application

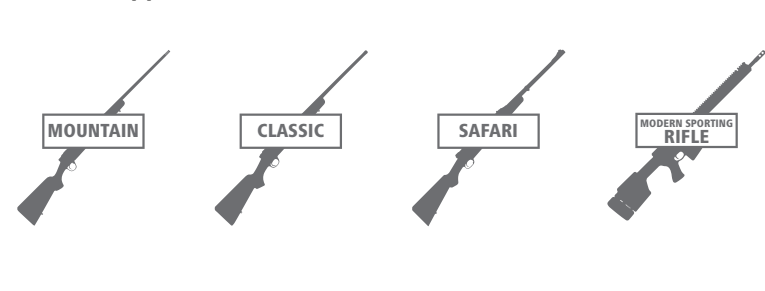

Target Usage Application




V6 5-30x50


The most compact high-magnification riflescope in the V6 product line, the 5-30x50 is perfect for mid- to long-range hunting and serious precision shooting. The wide magnification range provides great flexibility for those shooting in vast open terrains or varmint and predator hunting.

- Maximum power with superior optical performance across zoom range
- Ballistic Stop (absolute and positive return to zero)
- ZEISS FL lenses, enhanced T* coatings and LotuTec coating
- Side parallax adjustment
- Reticles: ZBR-1 / ZMOA-1 / #6 (plex)

Firearm Application

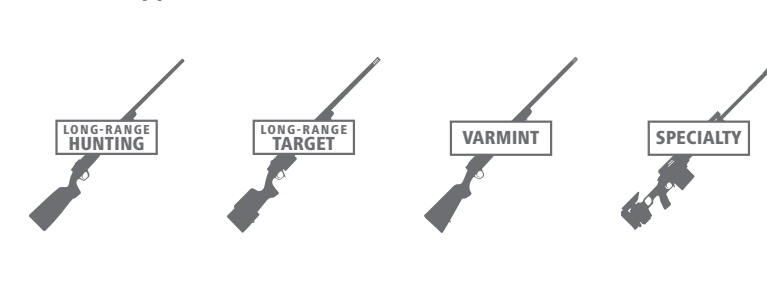

Target Usage Application

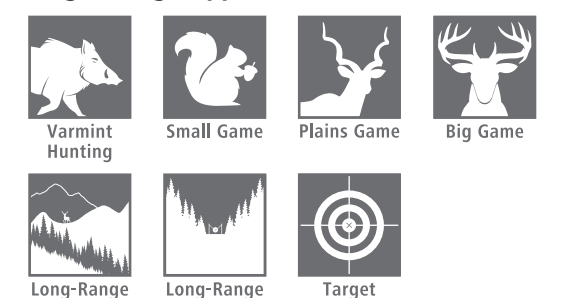

ZEISS CONQUEST V4 RIFLESCOPES

Performance oriented. Feature rich. Value packed.

The Conquest V4 riflescopes are for hunters and shooters whose lifestyle and adventures involve traditional and long-range hunting, as well as shooting and long-range shooting. These riflescopes were designed as a lightweight, high-performance product line for various demanding hunting and shooting applications. They are by any standard best-in-class.

The Conquest V4 family is based on a 4x zoom ratio, incorporates a 30 mm main tube, and consists of the 3-12x44, 3-12x56, 4-16x44, 4-16x50 and 6-24x50 models. Each model delivers 90% to-the-eye light transmission, offers .25 MOA or .50 MOA click values, capped windage adjustment, second focal plane reticle designs, and a large range of total elevation and windage travel adjustment.

The 3-12x44 and 3-12x56 versions come standard with capped elevation and windage turrets. The 4-16x44, 4-16x50 and 6-24x50 models have external elevation turrets. Within the Conquest V4 product line, all external elevation turrets also include ZEISS Ballistic Stop feature to ensure an absolute and positive return to zero under any conditions.

There are several reticle options available. These include traditional plex-style reticles, as well as the newest ZMOA and ZBR MOA-based smart reticles from ZEISS. Illuminated reticles are standard for the 4-16x50 models and optional for the 3-12x56 and 6-24x50 models. The 3-12x44 model is non-illuminated.

A magnification throw lever and ZEISS precision rings are available as optional accessories for the Conquest V4 riflescopes.

The Conquest V4 models are backed by the ZEISS Limited Lifetime Transferable Warranty and Five-Year No-Fault Policy. These riflescopes serve a wide range of hunting and shooting applications, are packed with unique features, perform beyond expectations in their price range and provide exceptional value. These features and options, combined with price, make this the most popular riflescope model for ZEISS to date.

FEATURES:

Intelligent innovations for exceptional results:

-  T* Six-Layer Lens Multi-Coating
-  LotuTec
-  90% Light Transmission
-  2ND 2nd Focal Plane
-  4_x 4x Zoom
-  400 MBAR Waterproof up to 400 mbar
-  N Nitrogen Purged
-  Illuminated
-  Lightweight
-  Capped Turret
-  External Turret
-  Multi-Turn Turret
-  B Ballistic Stop
-  1/4 MOA
-  30 mm Main Tube

PRODUCT HIGHLIGHT

Conquest V4

Heavy-duty optics for the demands of hunting and shooting.

Designed and Engineered in Germany

Absolute reliability: the mechanical systems stand the test of harsh recoil, extreme temperatures and abusive field conditions.


Side Parallax Adjustment

For applicable models, 50 yards to infinity to ensure absolute best images and most accurate shooting solutions.


Optical Performance

Higher definition glass, enhanced with T* light transmission coatings and LotuTec protective lens coating, produces 90% to-the-eye light transmission, great low-light performance and excellent target resolution across the entire magnification range. When combined, these features and benefits create a best-in-class experience.


RETICLE OPTIONS:




Z-PLEX




#60



ZBR



ZMOA



ZMOAi-T



Generous Eyebow

The friendly and forgiving eyebow, coupled with abundant eye relief and the wide field of view, affords the shooter fast and full target acquisition, which helps to enable swift and accurate shot placement.

Proven 4x Zoom

Relevant magnification ranges, with a 4x zoom ratio, provide a high level of versatility across a wide array of applications.

External Elevation Turret

Easy to manipulate, positive, tactile and highly repeatable turret, with Ballistic Stop and large range of adjustment, provides the shooter with maximum flexibility needed for challenging targets, no matter how far down range.

Second Focal Plane Reticle Options

Available with the traditional plex-style #60 illuminated reticle and Z-Plex #20. Other reticles include the ZEISS MOA-based smart reticles: ZBR and ZMOA. ZEISS has introduced the newer ZMOAi-T20 and ZMOA-T30 thin line reticles. These reticles feature fine line subtensions to ensure minimum target coverage and maximum target visibility.

ZEISS Conquest V4

A lightweight, highly versatile riflescope with a **4x zoom range**.




V4 4-16x44
4-16x50

The balance between wide field of view and magnification range makes these compact riflescopes ideal for all types of hunting and shooting. Offers mid- to long-range versatility.

- Large elevation and windage adjustment range
- Multi-turn elevation turret with Ballistic Stop (absolute and positive return to zero)
- Side parallax adjustment
- Reticles: #20 Z-Plex (plex-style) / ZBR-2 / ZMOA-2 / ZMOAi-1 / ZMOA-T30 (respective to model)

Firearm Application

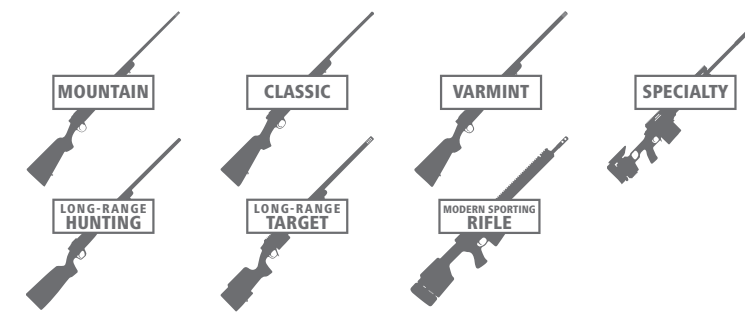

Target Usage Application




V4 3-12x44
3-12x56

This riflescope is suitable for stand hunting and for long-range shots. The large objective lens diameter and (optional) illuminated reticle guarantee aiming accuracy, even in low light.

- 44 mm and 56 mm objective lens diameter
- Large elevation and windage adjustment range
- Capped elevation and windage turrets (multi-turn)
- Fixed parallax
- Reticles: #20 Z-Plex (plex-style) / #60 (illuminated center dot) (respective to model)

Firearm Application



Target Usage Application




V4 6-24x50

Offering up to 24x magnification and side parallax adjustment, this riflescope is ideal for hunting, precision shooting and long-range applications.

- Large elevation and windage adjustment range
- Multi-turn elevation turret with Ballistic Stop (absolute and positive return to zero)
- Side parallax adjustment
- Reticles: ZBR-1 / ZMOA-1 / ZMOAi-1 / ZMOAi-T20

Firearm Application

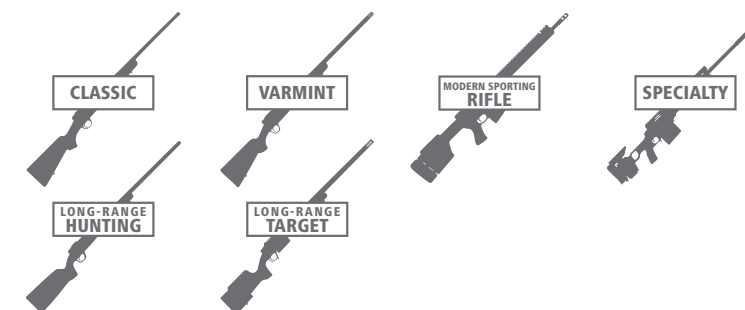

Target Usage Application



ZEISS VICTORY BINOCULARS

For the visionary.

Discover new perspectives where others see only limits. Demand only the best from yourself, and accept nothing less.

These are our benchmarks for the Victory line of binoculars from ZEISS.

Once you've held a ZEISS Victory binocular in your hands, you will never want to give it back. Minute details are perfected and thought through to excellence. Innovative optical and mechanical systems combine with superior ergonomics to deliver the uncompromising image that you expect: sharp, precise, clear.

Even in the most challenging conditions, the construction of the Victory line of binoculars from ZEISS is amazingly robust.

With ZEISS Victory binoculars in your hands, you have everything in sight, whether in the darkest hours of night or at the most extreme distances. The Victory line offers the performance you expect from ZEISS while delivering to you the optic experiences you demand.



Ultra-Fluoride and Fluoride Glass



Ensures a brighter viewing image that delivers absolute color fidelity, brightness, high contrast and the finest resolution of details.

FEATURES:

Intelligent innovations for exceptional results:



Ultra-FL lens system: Ensures natural color fidelity, high contrast, brilliance and finest detail rendition.



ZEISS FieldFlattener technology: Extreme edge sharpness, even with a wide field of view.



LotuTec coating: The dust-, dirt- and water-repellent coating guarantees a permanently clear view.



Magnesium materials: The combination of extremely lightweight and strong materials guarantees quality that lasts for generations.



***Smart Focus:** Optimum location of the focusing wheel ensures intuitive, fast and precise focusing.



***ErgoBalance:** Perfectly balanced weight distribution guarantees fatigue-free observation.



***Triple-link bridge:** Constructional stability and robustness that stand up to even the harshest conditions.

PRODUCT HIGHLIGHT

Victory RF Rangefinder

Range 11 - 2,500 yards right out of the box – and into the field.

Ballistic Information System II

Store up to nine custom ballistic profiles. Onboard sensors provide exact results for distance, temperature, air pressure and angle to give you an accurately compensated shooting solution.



Angle



Temperature



Pressure

Compact Design, Better Ergonomics

Carry with comfort: only 32 oz (42 mm) / 39 oz (54 mm). No humps or indentions. Large buttons, located right where you need them, with R/L switchable functionality. Focus wheel, close to the index finger, allows you to focus with ease – even with gloved hands.

Range Faster and Further

Fast, one-touch ranging – with either left or right hand. Ranges upon release of the ranging button, which ensures the utmost accuracy in your rangefinding results. Features Scan and Target modes. Displays holdover in inches/cm, MOA, MIL and clicks.

Automatic LED Brightness Adjustment

The Victory RF features 11 brightness curves, which adapt automatically to the exterior light conditions. Use the standard setting, or increase/decrease the brightness of the internal LED display based on your preference.

Bright, High-Resolution Images

Maximum optical performance thanks to Abbe-König prisms, FL glass, ZEISS T* coating and LotuTec Hydrophobic coating.





Victory RF Bluetooth™

Accurately engage your target.

With an array of innovative features and unmatched optical performance, the Victory RF with Bluetooth technology presents the new benchmark in optoelectronic and connected range-finding binocular technology.

- Bluetooth connectivity
- Range 11 to 2,500 yards
- Custom ballistic input via smartphone or tablet
- B.I.S. II – Onboard ballistic calculator with integrated sensors and ballistic profiles
- Measures angle, temperature and air pressure
- Calculates accurate shooting solutions
- Displays holdover in inches/cm, MOA, MIL and clicks
- Features Scan and Target modes
- Automatic LED brightness adjustment (11 brightness curves)
- User-programmable control buttons and display
- One-touch ranging (right or left hand)
- Syncs personal settings and ballistic profiles to and from the RF
- Superior image quality, enhanced by FL glass, ZEISS T* and LotuTec coatings
- Compact, lightweight and user-friendly ergonomics
- Large focusing wheel for minimal rotation
- High-grade magnesium frame with double-link bridge
- Rugged and waterproof
- Remote software updates via Bluetooth and ZEISS Hunting App

PRODUCT HIGHLIGHT

Victory RF and ZEISS Hunting App


Customize it and take it to the next level.



Utilizing its Bluetooth capability to synchronize with the ZEISS Hunting App, the Victory RF creates the perfect range-finding system. Nine custom ballistic profiles can be transferred from the app and stored onboard the Victory RF binocular. The user can then define and set their personal preferences for the ranging and ballistic data output on the LED display. The app is also useful for configuring other features, such as right- or left-handed operation or adjusting the display brightness.

The Bluetooth feature enables automatic factory device updates, which always ensures the highest performance, based upon the latest state-of-the-art research and development at ZEISS.

Visual representation of the Victory RF (VRF) display.

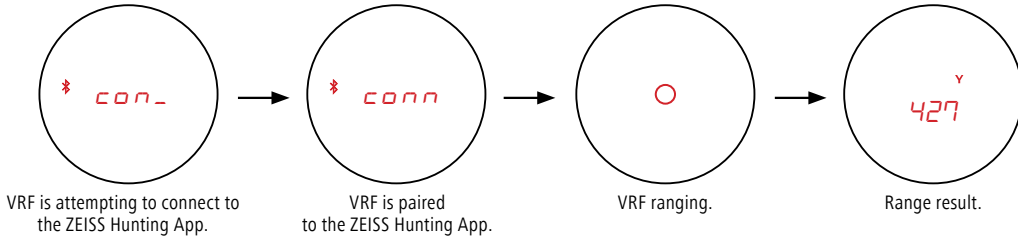









RF 8x42
10x42

The lightweight and compact 42 mm rangefinder models allow maximum mobility with connectivity. The real-time ballistics system of the Victory RF can be synchronized with the ZEISS Hunting App via Bluetooth. The 42 mm represents the ideal carry size.



ZEISS HUNTING APP

Features at a glance.

-  News
-  Field Notes
-  My Gear
-  Dashboard
-  Weather Data
-  Hunting Grounds
-  Ballistic Calculator
-  Connected Products

RF 8x54
10x54

In addition to the above features, this rangefinder comes with a larger 54 mm objective diameter. This model is for users who demand the highest light transmission in extreme low-light conditions.





ZEISS VICTORY SF

Our best binoculars for hunting and shooting.

There is something legendary about ZEISS binoculars. Founded on exceptional optical performance, outstanding ergonomics and robust construction, our innovations have constantly expanded the limits of what's technically possible.

No wonder generations of hunters and shooters swear by their ZEISS binoculars. ZEISS binoculars are heirloom-quality products that are passed down from generation to generation, together with the stories that came with them.

Time never stands still.

SF 8x42
10x42

- Perfect ergonomics
- Lightweight – only 27.5 oz
- Unparalleled field of view: 444 ft (8x) / 360 ft (10x) at 1,000 yds
- Ultra-FL lens system

The Victory SF allows you to experience the most exciting hunting moments as never before. The optical perfection, the unparalleled field of view, the revolutionary ergonomics and the ultra-light design make these the best all-purpose binoculars ever built by ZEISS.

Experience the ZEISS Victory SF as the most versatile premium binoculars in the company's 165-year history.




ErgoBalance

The Victory SF anatomy takes into account human anatomy, which allows for our best fatigue-free binocular design. Its unique ErgoBalance concept provides the ideal weight distribution and balance. The perfect ergonomics allow for hours of steady observation without fatiguing the arms and eyes.

Ideal Weight Distribution

- less weight
- weighted

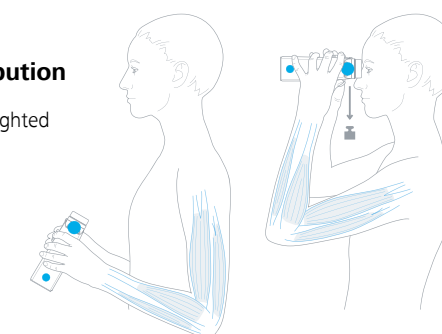

PRODUCT HIGHLIGHT

Victory SF

The **most premium** binoculars in the history of ZEISS.

More Robust

Robust construction and ergonomic design: TripleLink bridge. Unmatched craftsmanship and optical design: made in Germany.

More Portable

Feather-light design and ultra-light magnesium materials.

Wider

Widest field of view in its class: 444 ft or 360 ft at 1,000 yds.

Sharper

Natural colors and brilliant details: Ultra-FL concept.

Brighter

Maximum brightness that extends your day in the field: 92% light transmission. Outstanding image quality: fluoride lenses made with SCHOTT glass.

Faster

Focus at varying distances quickly and intuitively: SmartFocus concept. Precise operation and natural grip in ideal hand position: anti-slip focusing wheel.

Closer

Never miss a detail: 5 foot close-range focus. 4-click eyecup adjustment.

More Ergonomic

Hours of fatigue-free observation: lightweight at 27.5 oz. Ideal weight distribution for a steady hand: ErgoBalance concept.



PRODUCT HIGHLIGHT

ZEISS Victory Binoculars

Dominate the twilight hours.

Victory HT

A Brighter Outlook

The ZEISS Victory HT is not simply bright; the integration of FL lenses brings outstanding brilliance to the viewing image.

Built to Last a Lifetime

The use of magnesium alloys, combining low weight with high rigidity, guarantees a long and reliable service life.



Form Follows Function

The large focusing wheel of the Comfort-Focus concept ensures superior handling ergonomics, even when wearing gloves.

SCHOTT
HT GLASS

HT 8x54
10x54

ZEISS Victory HT binoculars with 54 mm objective lenses are among the most powerful low-light hunting binoculars from ZEISS. With 95% light transmission, these binoculars guarantee maximum performance at dusk and dawn.

- SCHOTT HT glass with 95% light transmission provides a significant increase in image brightness.
- FL concept ensures maximum image sharpness.
- Comfort-Focus concept yields perfect ergonomics with effortless use.



FL 8x32
10x32

Fluoride lenses (FL) minimize color fringing and ensure superior edge sharpness. The user enjoys a sharp image with the finest resolution of details. In addition, the compact size and lightweight design make them ideal for prolonged observation.

- FL glass produces superb images with neutral color rendition.
- Amazing low-light performance
- Wide field of view: 360 ft at 1,000 yds



Pocket 8x25
10x25

The Victory Pocket promises high performance in all kinds of outdoor applications. Despite the incredible lightweight construction, their high magnification and FL lenses with the ZEISS T* multi-layer coating help them to deliver brilliant image quality. The asymmetrical folding makes it particularly compact.

- Exceptionally compact and robust
- Excellent optical performance
- Modern and ergonomic design



Illustration represents product in use.



Illustration represents product folded for transport.

PRODUCT HIGHLIGHT

Conquest HD

Optical **excellence** for your success.

Nature never stops. And neither does ZEISS. This is especially true with Conquest binoculars – a revolution in design, ergonomics and optics. Made in Germany, these rugged binoculars combine traditional ZEISS quality with state-of-the-art technology. What does HD stand for: heavy duty or higher definition? At ZEISS, the answer is both.

Compact & Lightweight

Easy to use and comfortable in the hands

Brilliant Close Focus

Precise focusing – even with gloves on

**LotuTec Lens Coating**

Sheds water, dirt, grease and grime – lenses clean easily without smearing

Razor-Sharp

HD lens system with T* and dielectric prism coatings for clear, natural colors

Best Ergonomics

Unique shape with special grip area for stability

HD 8x32
10x32

Thanks to the extra-wide field of view of the HD lens systems, compact dimensions, low weight and carrying comfort, the Conquest HD 8x32 / 10x32 is the ideal high-performance companion for every situation.

- Compact and lightweight – perfect ergonomics
- HD lens system
- Fast and precise focusing – even with gloves on



HD 8x42
10x42

Made in Germany, these HD binoculars with 42 mm objective diameter offer exceptional quality and performance. They are ideal for users who are looking for sharpness, high resolution of details, natural color rendition and outstanding quality in the close-focusing range.

- All-purpose binoculars
- HD lens system
- Designed and engineered in Germany



HD 8x56
10x56
15x56

The 56 mm models are the specialists for situations in low-light conditions. They impress with a bright, high-contrast viewing image. The 15x56 is supplied standard with a tripod adapter.

- Performs in extremely low light
- HD LENS SYSTEM
- Tripod adapter included with 15x model



PRODUCT HIGHLIGHT

Terra ED

Perfect for every adventure.

Lightweight, compact and rugged – that’s the Terra® from ZEISS. Experience the legendary ZEISS quality in a form focused on the essentials: ease of use, sturdiness and optical performance.

Ergonomic Handling

The large, smooth and easy-to-grip focus wheel makes it incredibly fast and simple to bring nature into focus.

Compact, Light and Robust

With a fiberglass-reinforced, waterproof housing, ZEISS Terra ED is built to withstand the toughest conditions.

Proven Excellence

SCHOTT ED glass with a hydrophobic multi-coating provides optical clarity and precision in all situations.



ED 8x32 10x32

Impressive images, precise focusing and compact size are the main features of the 32 mm version of the Terra ED.

- Award-winning German design and engineering
- SCHOTT ED glass and ZEISS MC coatings
- Compact and lightweight



ED 8x42 10x42

A bright image, outstanding resolution of details, comfortable viewing characteristics and optimum ease of handling make the Terra ED 42 mm outstanding in its class.

- Bright, crisp image, even in low light
- Quick and smooth focusing from 5.2 ft to infinity
- SCHOTT ED glass and ZEISS MC coatings



ED Pocket 8x25 10x25

In its class, the extremely lightweight and compact Terra ED Pocket delivers an outstanding viewing experience and impresses with intuitive handling.

- Extremely compact and lightweight
- Large field of view
- 100% waterproof housing



Illustration represents product in use.



Illustration represents product folded for transport.



20x60 S Image Stabilization

Superlative binoculars in every respect: these image-stabilizing binoculars were developed for the longest distances and used on missions to the International Space Station (ISS). The exceptional light transmission of the Porro prism system guarantees the brightest images with outstanding resolution of details even at 20x magnification. The technically unique mechanical image stabilization system of the 20x60 T* S ensures a perfect optical experience; the unavoidable shake always encountered when observing with handheld binoculars can be eliminated easily at the press of a button.



Mono 3x12

The 3x12 is a powerful mini-telescope with 3x magnification. It transforms Victory* and Conquest binoculars with objective lens diameters of 30 millimeters and larger into high-performance spotting scopes just by attaching it to the eyepiece with an adapter ring. Can also be used separately as a magnifier in the close focus range.

**Not compatible with SF.*



Monoculars

For a precisely detailed view at sporting events, in the theater or at longer distances outdoors, the Monos with ZEISS T* multi-coating impress with a bright and clear image. Some models can also be used as stand-alone magnifiers for detailed, close-up views.



ZEISS SPOTTING SCOPES

Leading optical technology to reveal the world around us.

Curiosity. Passion. Pursuit.

The world of hunting and shooting is about passion, no matter where you happen to be – in extreme environments like the Antarctic or the Amazon Basin and even in your own backyard. This is why so many people have discovered their devotion for shooting and hunting. It also explains why there are so many different demands on the optical equipment being used.

Spotting scopes from ZEISS fulfill these demands in a variety of ways: the natural reproduction of colors, the finest rendition of details, outstanding brightness and contrast,

along with wide fields of view, reveal the world around us in extraordinary detail. Breathtaking magnification brings your work close at hand.

These are the features that make ZEISS spotting scopes favorites around the globe. ZEISS provides the quality that makes it easier for people to engage the outdoors and experience more moments of true fulfillment every day.

Our online product guide will lead you step-by-step to the perfect ZEISS observation optics for your specific needs.

FEATURES:

Intelligent innovations for exceptional results:

FL lenses:
Natural color fidelity, high contrast, brilliance and the finest detail rendition.

LotuTec coating:
The dust-, dirt- and water-repellent coating guarantees a permanently clear view.

Dual-Speed Focus system:
Precise focusing with automatic switch between fast- and fine-focusing drive.

Mg Magnesium materials:
The combination of extremely lightweight and strong materials guarantees quality that lasts for generations.

Objective body magnification:
Unique to ZEISS is relocating the magnification ring from the eyepiece to the spotting scope body, alongside the focus wheel.


PRODUCT HIGHLIGHT

Victory Harpia

The most powerful performance.

High-Performance Eyepiece

Slim construction for a comfortable viewing experience. Secure and lockable bayonet mount.

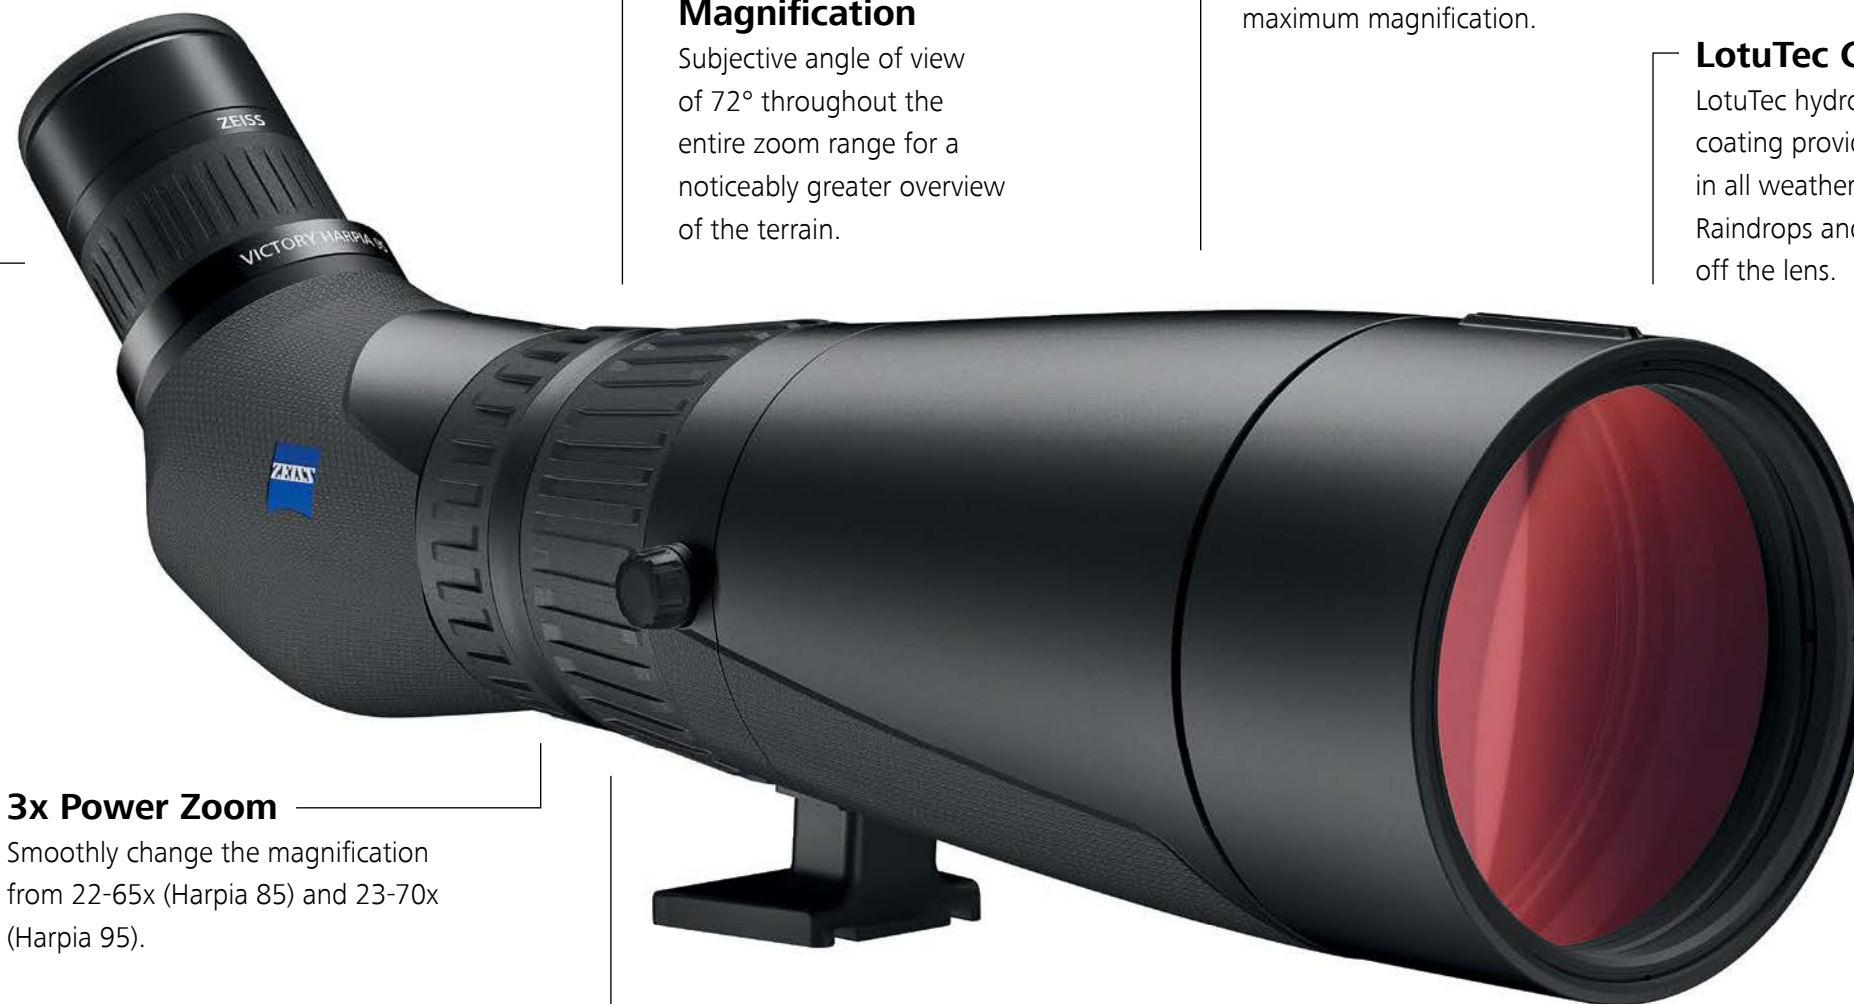

Objective Body Magnification

Subjective angle of view of 72° throughout the entire zoom range for a noticeably greater overview of the terrain.

Elaborate Optical Design

FL lenses and other specialty manufactured glass types ensure a razor-sharp viewing image with natural color fidelity, even at maximum magnification.

LotuTec Coating

LotuTec hydrophobic lens coating provides a clear view in all weather conditions. Raindrops and dirt simply roll off the lens.

3x Power Zoom

Smoothly change the magnification from 22-65x (Harpia 85) and 23-70x (Harpia 95).

Dual-Speed Focus

Precise focusing with automatic gear switch between fast- and fine-focusing drive.



Harpia 95

The revolutionary optical system features a 3x wide-angle zoom, up to 70x magnification and an objective lens diameter of 95 millimeters. The extremely wide fields of view prove their worth in every situation. The Harpia 95 also features precise focusing. Convenient automatic transition from rapid- to fine-focus adjustment, even at high magnification, sets the Victory Harpia apart and places it well ahead of other premium spotting scopes.



Harpia 85

The Harpia 85 features many of the same advantages of the Harpia 95, but it has a lighter and slightly more compact chassis. The use of FL lenses and other specially formulated glass types allows the Harpia 85 to deliver an absolutely sharp viewing image with natural color fidelity – even at maximum magnification of 65x. The subjective angle of view of 72° throughout the entire zoom range provides a noticeably greater overview of the terrain.

ComfortVision Concept

An apparent field of view of 72° across the entire zoom range provides a noticeably larger overview in the field.



Field of view comparison between a spotting scope set to the lowest magnification of 30x (inner circle) and the Harpia, set to the lowest magnification of 23x (outer circle).

ZEISS Victory Vario Eyepiece



Designed to deliver an exceptionally wide field of view at all magnifications, the **ZEISS Victory Vario Eyepiece**, when paired with either the 85 mm or 95 mm Victory Harpia spotting scope, presents users with a clear and crisp panoramic view from the predawn hours to well past dusk.

PRODUCT HIGHLIGHT

Conquest Gavia 85

The explorer's companion.

Brilliant

Roof prism system designed for high optical precision.

Light

Magnesium body and compact dimensions for outdoor adventures.

Ergonomic

Large focusing ring for precise handling.

High-Detail Resolution

HD lens system for a bright and clear viewing image.



Gavia 85

This spotting scope with an 85 mm objective lens is particularly lightweight and compact. This makes it the ideal instrument for close and long-range observation, especially in difficult-to-access regions. A unique feature is the close-focus range, which makes the observation of small, nearby targets an easy task, while maintaining incredible image quality.

Retractable Sunshade

PRODUCT HIGHLIGHT

Dialyt 18-45x65

Dialyt 18-45x65

This light, compact field spotter was developed for fast and precise target identification at extreme distances. A waterproof, non-fogging construction, reliable functioning and simple handling make it the ideal companion for hunting in flat, open country or in rugged, mountainous terrain.

Rugged Housing

Waterproof, dustproof and nitrogen filled to prevent internal fogging

Fast Target Acquisition

Enables observers to position, view and focus instantly.



Compact Construction

Lightweight, compact design allows the Dialyt to fit comfortably in a backpack.

Tripod Connection

Dialyt can be mounted on a tripod for comfortable, stable observation.

Multi-layer Lens Coating

High light transmission for brighter, sharper images, even in low light situations.





Image illustrates mounting of Conquest V4 riflescope with rings



Bubble level

Aerial view

Product view by set



ACCESSORIES FROM ZEISS

With Precision in Mind: ZEISS Accessories for Riflescopes

ZEISS Precision Rings

ZEISS Precision Rings are manufactured to the highest of standards, from premium materials, and with tight tolerances for your long-term safety and field applications.

Ultralight 1913 Mil-Spec Rings with Integral Anti-Cant Level – Aluminum 7075-T6

	Order Number
For 30 mm tubes - Low (.850 in / 21.6 mm)	2309 905
For 30 mm tubes - Medium (1.0 in / 25.4 mm)	2309 906
For 30 mm tubes - High (1.18 in / 30 mm)	2309 907
For 30 mm tubes - X-High 1.375" / 34.9mm)	2345 660
For 30 mm tubes - XX-High (1.5" / 38.1 mm)	2345 661
For 34 mm tubes - Low (1.0" / 25.4 mm)	2345 663
For 34 mm tubes - Medium (1.125" / 28.5mm)	2345 664
For 34 mm tubes - High (1.375" / 34.9 mm)	2345 665
For 34 mm tubes - X-High (1.5" / 38.1 mm)	2345 666
For 36 mm tubes - Medium (1.06 in / 27 mm)	2309 918
For 36 mm tubes - High (1.22 in / 31 mm)	2309 919



Rings – 36 mm Detachable

For the Victory V8 riflescopes.	Order Number
Talley Signature Rings - 36 mm Low	58 47 65
Talley Signature Rings - 36 mm Med	58 47 66
Talley Signature Rings - 36 mm High	58 47 68



Throw Lever for Conquest V4 and V6

For fast magnification changes when speed is a critical factor.

Throw Lever for	Order Number
Conquest V4	2224 168
Conquest V6	2224 899



Flip-Up Cover for the Victory V8

This high-quality, extremely durable front lens cap is screwed into the lens filter thread and offers perfect protection in any weather conditions. It can be fixed in any position and is suitable for use by left- and right-handed shooters. The field of view is not impaired, and handling while hunting is unimpeded.

Flip-Up Cover	Order Number
Victory V8 Flip-Up Cover 30 mm	2152 898
Victory V8 Flip-Up Cover 50 mm	2105 737
Victory V8 Flip-Up Cover 56 mm	2105 798
Victory V8 Flip-Up Cover 60 mm	2173 926



ACCESSORIES FROM ZEISS

Binocular Accessories



Tripod Adapter 1/4"

This ZEISS tripod adapter is made to mount the Conquest HD or Terra ED binoculars to a tripod. It is constructed from high-grade magnesium and has a 1/4-20 female threaded connector on its base.

Tripod Adapter	Order Number
Tripod Mount 1/4"	52 83 88



Tripod Adapter

Field Case for	Order Number
Victory SF	2060 069
Terra ED 32	2196 165
Terra ED 42	2196 167
Terra Pocket	2197 806



Field Case for Victory SF



Field Case for Terra ED

Binofix Universal Tripod Mount

The universal adapter ensures that the ZEISS binoculars of 30 mm objective sizes or larger can be mounted quickly and easily on any type of tripod. This enables stable observation over longer periods of time, even at extremely high magnifications. When you use a tripod-mounted binocular with the triple boost of the Mono attachment, you can enjoy a visual experience similar to that provided by a spotting scope.

Tripod Mount	Order Number
Binofix Tripod Fixture – Suitable for All Binocular Models	52 83 87



Binofix Universal Tripod Mount

Cordura Bag	Order Number
Conquest HD and Terra ED – 32 mm	2070 548
Conquest HD and Terra ED – 42 mm	1976 008



Field Case for Terra Pocket



Cordura Bag

Adapter for Magnification Attachment

In order to use the Mono 3x12 T* as a booster for your binoculars, you need to attach it with an adapter.

Magnification Attachment Adapter	Order Number
Victory® FL/RF/HT & Conquest® HD – Adapter for 3x12 Mono – Tripler – 32 & 42 mm	52 83 77
Conquest® HD – Adapter for 3x12 Mono – 56 mm	52 83 79



Adapter for Magnification Attachment

Carrying Strap	Order Number
Air Cell Comfort Carrying Strap	52 91 13



Air Cell Comfort Carrying Strap



Binocular Harness (Premium)

Binocular Harness	Order Number
Binocular Harness (Standard)	49 00 90
Binocular Harness (Premium)	52 91 15

ACCESSORIES FROM ZEISS

Spotting Scope Accessories



Stay-On Case for Victory Harpia

The case offers reliable protection against all kinds of weather and wet conditions, is comfortable to carry, and enables fast access to the spotting scope for use. The caps for the eyepiece and the objective lens can be securely attached to the case to prevent loss.

	Order number
Victory Harpia 85 Stay-On Case	2169 977
Victory Harpia 95 Stay-On Case	2169 976
Victory Harpia Eyepiece Pouch, Neoprene	2164 352



1.25" Astro Adapter

For mounting standard astro eyepieces.

	Order Number
Conquest Gavia 85 Astro Adapter	52 83 45



ZEISS Tripod Professional

Carbon Fiber Tripod

The ZEISS tripod professional fulfills the most demanding requirements with regard to compatibility and loading weight, and it enables smooth panning and tilting. It is particularly suitable for use with our Victory products and for digiscoping.

Maximum Height	72.4 in
Minimum Height	24.8 in
Length (unextended)	27.5 in
Weight	5.4 lb

	Order Number
ZEISS Tripod Professional	21 69 972
Long Balance Plate	21 69 974



Long Balance Plate



Stay-On Case for Conquest Gavia

Developed especially for the Conquest Gavia, this case protects the spotting scope against environmental influences, such as moisture and dirt. In addition, optimum carrying comfort, fast access to the spotting scope for use, and an option for attaching the eyepiece and objective lens cap to the case make it an invaluable part of the equipment.

	Order number
Conquest Gavia 85 Stay-On Cover	2169 979



ZEISS Photo Adapter

Whether for still photos or film, the photo adapter (for M49, M52 or M58 filter threads) enables direct attachment of a digital camera to transform the spotting scope into a powerful telephoto lens.

Spotting Scope	Order Number
Conquest Gavia 85 Photo Lens Adapter M49	52 83 48 9901
Conquest Gavia 85 Photo Lens Adapter M52	52 83 48 9902
Conquest Gavia 85 Photo Lens Adapter M58	52 83 48 9903
Victory Harpia Photo Lens Adapter M49	52 83 57 9901
Victory Harpia Photo Lens Adapter M52	52 83 57 9902
Victory Harpia Photo Lens Adapter M58	52 83 57 9903

Cleaning Products

ZEISS premium lens care products



ZEISS Lens Care Kit

Compact enough to store in almost any bag, this kit comes with a 2-ounce lens cleaning spray bottle and a microfiber cloth.

	Order Number
Lens Care Kit – 2 oz	2127 990

ZEISS Lens Cleaning Kit

Bellows, dust brush, optic cleaning solution (1 oz), microfiber cloth (18x18 cm) and 10 wet wipes.

	Order Number
ZEISS Lens Cleaning Kit	2096 685

ZEISS 60 ct. Box Lens Wipes

Includes: 60 individually packaged pre-moistened lens cleaning wipes.

	Order Number
ZEISS 60 ct. Box Lens Wipes	2127 721

Second Focal Plane Reticles




RETICLE TYPE RETICLE #

ZBR-1 91

NON-ILLUMINATED

RIFLESCOPE(S)	CONQUEST V6 5-30x50	CONQUEST V4 3-12x44	CONQUEST V4 6-24x50
Magnification	@ 25x	@ 12x	@ 24x
	MOA	MOA	MOA
Distance A	1	1	1
Distance B	5	5	5
Distance C	20	20	20
Distance D	4	4	4
Line Thickness E	0.14 @ 25x	0.14 @ 12x	0.14 @ 24x

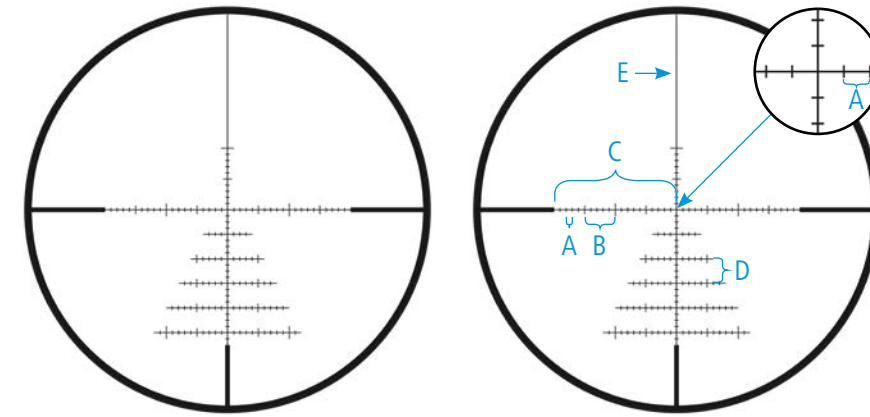


RETICLE TYPE RETICLE #

ZBR-2 92

NON-ILLUMINATED



RIFLESCOPE(S)	CONQUEST V6 3-18x50	CONQUEST V4 4-16x44
Magnification	@ 18x	@ 16x
	MOA	MOA
Distance A	2	2
Distance B	10	10
Distance C	20	20
Distance D	4	4
Line Thickness E	0.19 @ 18x	0.19 @ 16x

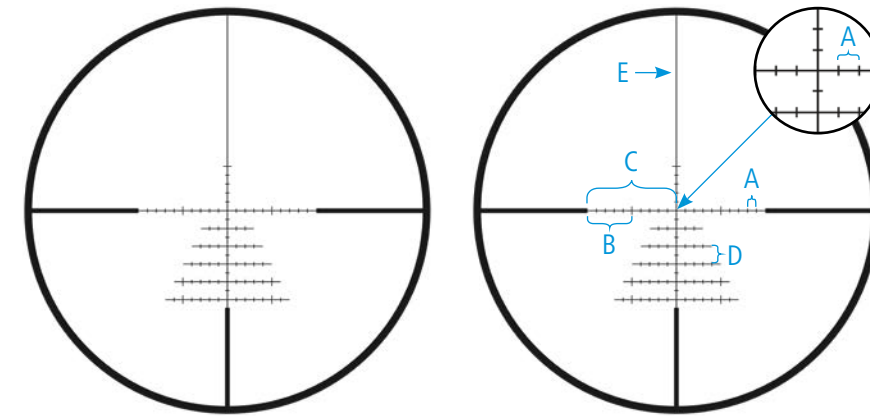

RETICLE TYPE RETICLE #

Mil-Dot 43

RIFLESCOPE(S)	VICTORY V8 4.8-35x60
Magnification	@ 30x
	cm / 100 m
Line Thickness A	0.3 @ 30x
Bar Thickness B	1.7
Distance Between Dots	10
Dot Size C	1.3
Opening D	50
Illuminated Center Dot	0.24

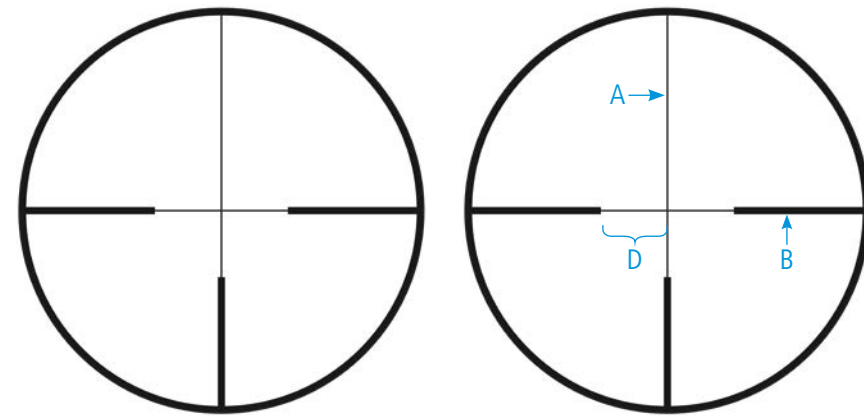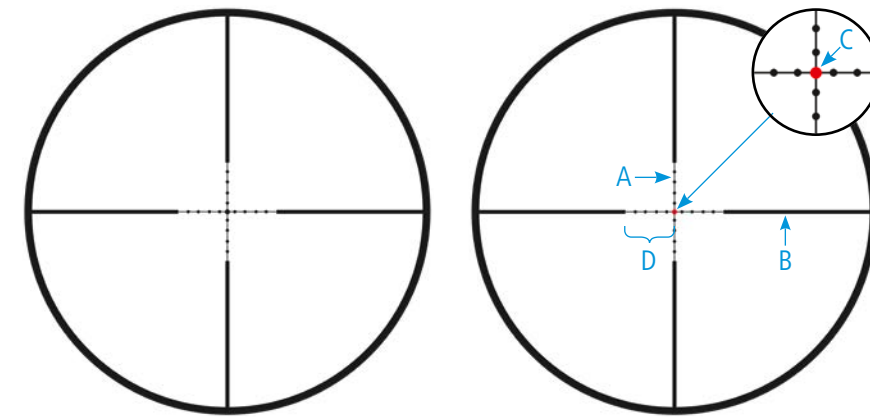

RETICLE TYPE RETICLE #

Plex-Style 6

NON-ILLUMINATED



RIFLESCOPE(S)	CONQUEST V6 3-18x50	CONQUEST V6 5-30x50
Magnification	@ 18x	@ 30x
	MOA	MOA
Line Thickness A	0.21	0.10
Bar Thickness B	0.96	0.58
Dot Size C	N/A	N/A
Opening D	13.41	8.08

RETICLE TYPE RETICLE #

Z-Plex 20

NON-ILLUMINATED

RIFLESCOPE(S)	CONQUEST V4 3-12x44	CONQUEST V4 3-12x56	CONQUEST V4 4-16x44
Magnification	@ 12x	@ 12x	@ 16x
	MOA	MOA	MOA
Line Thickness A	0.17	0.17	0.13
Bar Thickness B	0.95	0.95	0.71
Dot Size C	N/A	N/A	N/A
Opening D	16.6	16.6	12.5

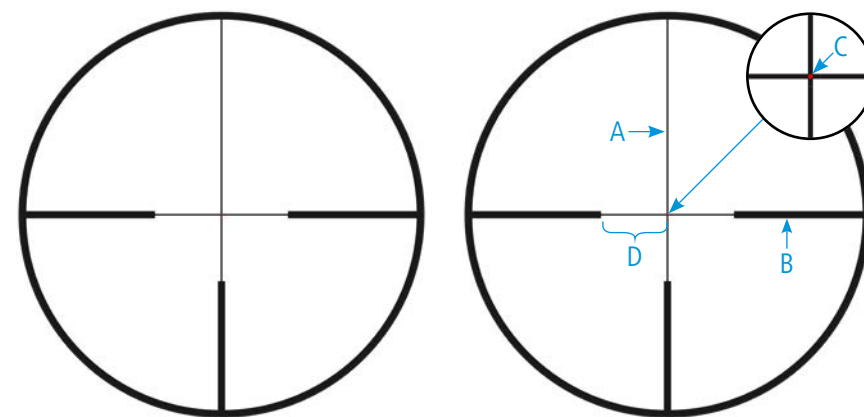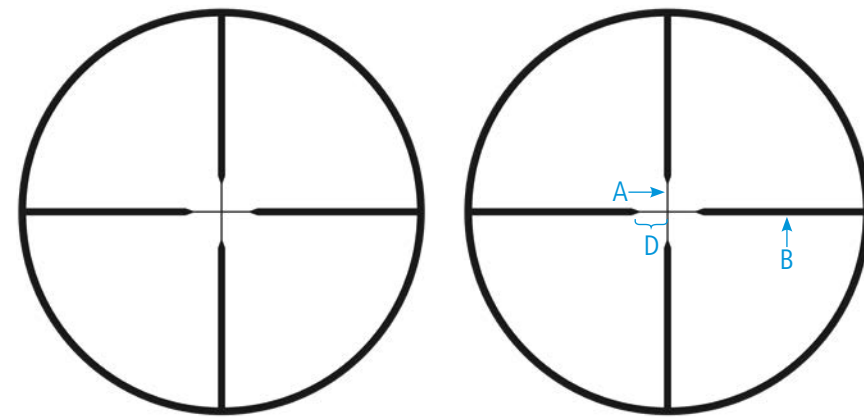

RETICLE TYPE RETICLE #

Plex-Style w/ Dot 60


ILLUMINATED


RIFLESCOPE(S)	VICTORY V8 1-8x30	VICTORY V8 1.8-14x50
Magnification	@ 8x	@ 14x
	MOA	MOA
Line Thickness A	0.45	0.24
Bar Thickness B	1.86	1.07
Dot Size C	0.31	0.17
Opening D	30.08	17.19

(continued from page 68) RETICLE #

60

VICTORY V8 2.8-20x56	VICTORY V8 4.8-35x60	CONQUEST V6 1-6x24	CONQUEST V4 3-12x56
@ 20x	@ 35x	@ 6x	@ 12x
MOA	MOA	MOA	MOA
0.17	0.10	0.58	0.34
0.76	0.41	2.85	1.72
0.12	0.07	0.41	0.24
12.03	6.88	40.05	24.07

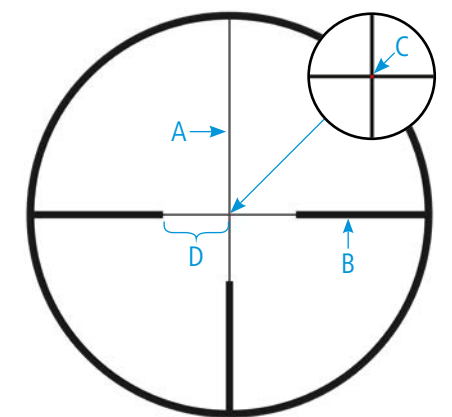


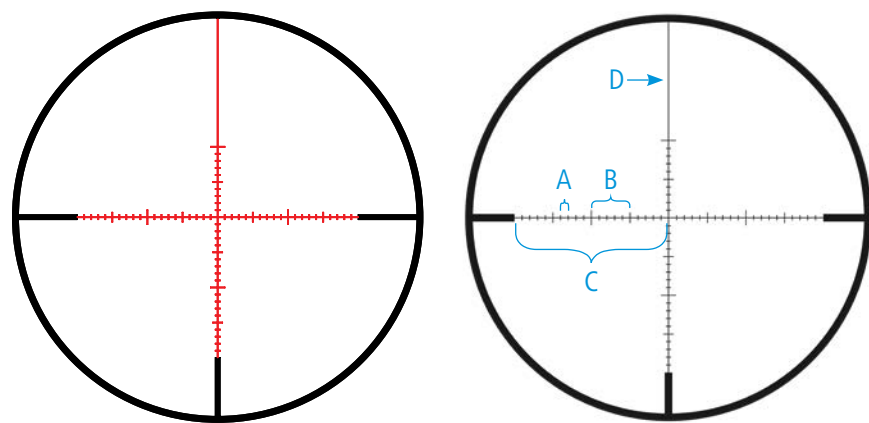

RETICLE TYPE **RETICLE #**
ZMOAi-1 **93**

ILLUMINATED


RIFLESCOPE(S)	CONQUEST V4 4-16x50	CONQUEST V4 6-24x50
Magnification	@ 16x	@ 24x
	MOA	MOA
Distance A	1	1
Distance B	5	5
Distance C	20	20
Line Thickness D	0.14 @ 16x	0.14 @ 24x

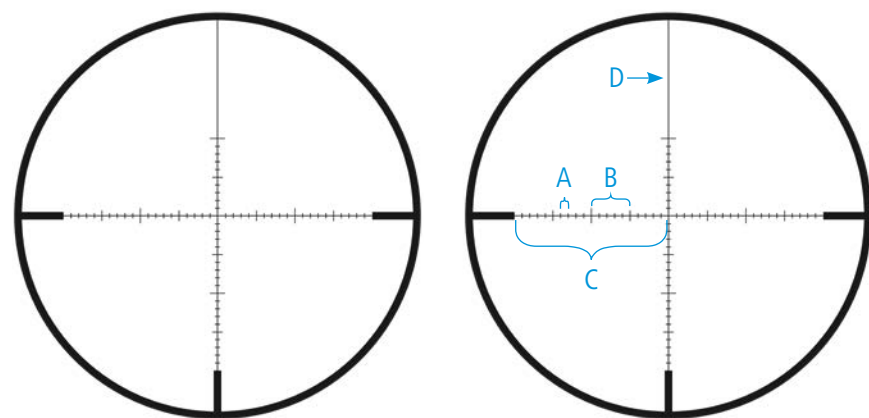

RETICLE TYPE **RETICLE #**
ZMOA-1 **93**

NON-ILLUMINATED


RIFLESCOPE(S)	CONQUEST V6 5-30x50	CONQUEST V4 6-24x50
Magnification	@ 25x	@ 24x
	MOA	MOA
Distance A	1	1
Distance B	5	5
Distance C	20	20
Line Thickness D	0.14 @ 25x	0.14 @ 24x

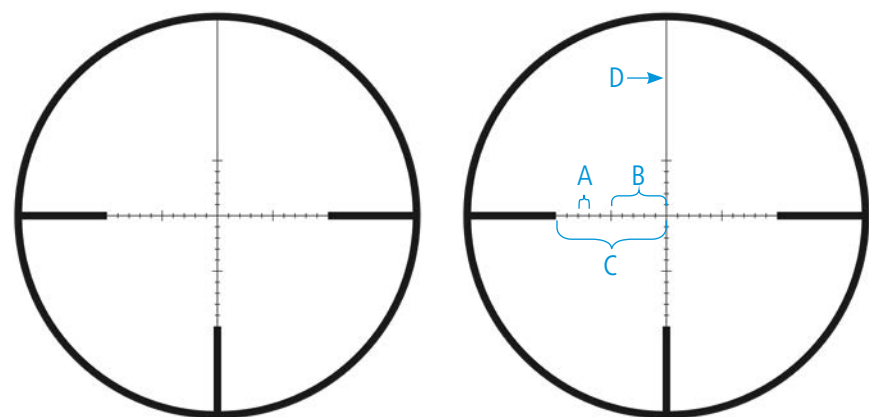

RETICLE TYPE **RETICLE #**
ZMOA-2 **94**

NON-ILLUMINATED

RIFLESCOPE(S)	CONQUEST V6 3-18x50	CONQUEST V4 4-16x44
Magnification	@ 18x	@ 16x
	MOA	MOA
Distance A	2	2
Distance B	10	10
Distance C	20	20
Line Thickness D	0.19 @ 18x	0.19 @ 16x

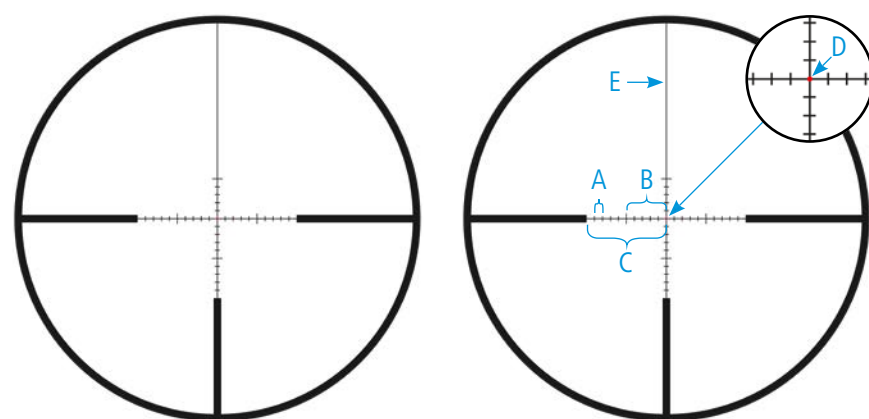


RETICLE TYPE **RETICLE #**
ZMOA-4 **95**

ILLUMINATED RED DOT

RIFLESCOPE(S)	CONQUEST V6 1-6x24
Magnification	@ 6x
	MOA
Distance A	4
Distance B	20
Distance C	40
Dot Size D	0.38 @ 6x
Line Thickness E	0.53 @ 6x



New!

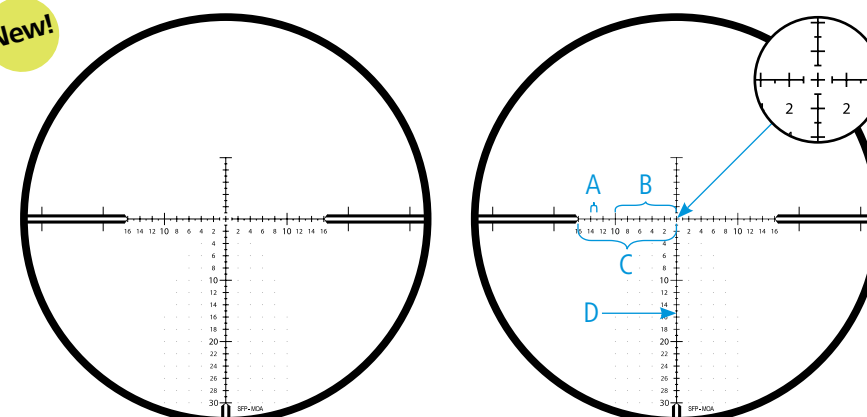


See pages 10-11 for detailed reticle information.

RETICLE TYPE **RETICLE #**
ZMOA-T30 **64**

NON-ILLUMINATED

RIFLESCOPE(S)	CONQUEST V4 4-16x44
Magnification	@ 16x
	MOA
Distance A	1
Distance B	10
Distance C	16
Line Thickness D	0.12 @ 16x

New!

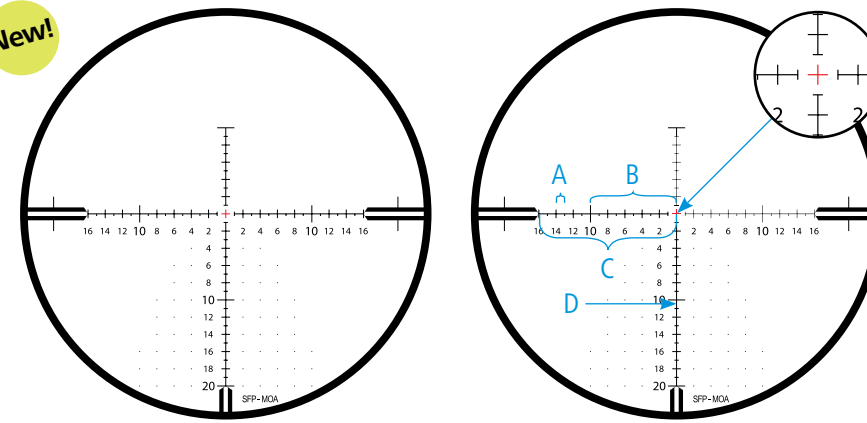

See pages 10-11 for detailed reticle information.

RETICLE TYPE **RETICLE #**
ZMOAi-T20 **65**

ILLUMINATED

RIFLESCOPE(S)	CONQUEST V4 6-24x50
Magnification	@ 24x
	MOA
Distance A	1
Distance B	10
Distance C	16
Line Thickness D	0.06 @ 24x

TECHNICAL SPECIFICATIONS

Victory V8



TECHNICAL SPECIFICATIONS

Conquest V6



Model	V8			
	1-8x30	1.8-14x50	2.8-20x56	4.8-35x60
Magnification	1.1x-8x	1.8x-13.5x	2.8x-20x	4.8x-35x
Focal Plane	Second	Second	Second	Second
Effective Lens Diameter	9.9 mm-30 mm	18.6 mm-50 mm	27.5 mm-56 mm	48.1 mm-60 mm
Exit Pupil Diameter	9.9 mm-3.9 mm	10.3 mm-3.7 mm	9.8 mm-2.8 mm	9.9 mm-1.4 mm
Twilight Factor	3.1-15.5	5.1-26	7.9-33	13.6-45.8
Field of View at 100 yds	110 ft-15 ft	63 ft-8.5 ft	42 ft-5.7 ft	24 ft-3.3 ft
Angular Field of View, Real	20.5°-2.8°	12.0°-1.6°	8.1°-1.1°	4.6°-0.6°
Diopter Range	-3.5 / +2 dpt			
Eye Relief	3.75 in			
Parallax Setting	109 yds	50 yds - ∞		
Elevation Adjustment Range	172 MOA	106 MOA	72 MOA	40 MOA
Windage Adjustment Range	110 MOA	69 MOA	46 MOA	26 MOA
Click Value	0.33 MOA			0.167 MOA
Main Tube Diameter	36 mm			
Eye-piece Tube Diameter	46 mm			
Objective Tube Diameter	36 mm	56 mm	62 mm	67 mm
Coating	LotuTec® / ZEISS T*			
Fogproof	Nitrogen Purged			
Waterproof	400 mbar (submerged 13 ft for 2 hours)			
Operating Temperature	-13 / +122°F			
Length	12 in	13.5 in	13.75 in	15.75 in
Weight	without inner rail	21 oz	25 oz	29 oz
	with inner rail	22 oz	26 oz	30 oz
Reticles	#60 illum.	#60 illum.	#60 illum.	#43 illum. / #60 illum.

Model	V6		
	1-6x24	3-18x50	5-30x50
Magnification	1.1x-6.5x	3x-18x	5x-30x
Focal Plane	Second	Second	Second
Effective Lens Diameter	10.5 mm-24 mm	28.6 mm-50 mm	47.8 mm-50 mm
Exit Pupil Diameter	9.6 mm-3.7 mm	9.5 mm-2.8 mm	9.5 mm-1.7 mm
Twilight Factor	3.1-12.5	8.5-30	14.1-38.7
Field of View at 100 yds	102.6 ft-16.8 ft	37.2 ft-6.3 ft	22.2 ft-3.6 ft
Angular Field of View, Real	19.4°-3.2°	7.1°-1.2°	4.2°-0.7°
Diopter Range	-3 / +2 dpt		
Eye Relief	3.5 in		
Parallax Setting	100 yds	50 yds - ∞	50 yds - ∞
Elevation Adjustment Range	103 MOA	103 MOA	62 MOA
Windage Adjustment Range	103 MOA	58 MOA	34 MOA
Click Value	0.5 MOA	0.25 MOA	0.25 MOA
Main Tube Diameter	30 mm		
Eye-piece Tube Diameter	45.5 mm		
Objective Tube Diameter	30 mm	56 mm	56 mm
Coating	LotuTec® / ZEISS T*		
Fogproof	Nitrogen Purged		
Waterproof	400 mbar (submerged 13 ft for 2 hours)		
Operating Temperature	-12 / +122° F		
Length	11.2 in	13.3 in	14.9 in
Weight	17.8 oz	22.2 oz	27.9 oz
Reticles	#60 illum. / ZMOA-4	#6 / ZBR-2 / ZMOA-2	ZBR-1 / ZMOA-1

TECHNICAL SPECIFICATIONS

Conquest V4



	V4				
Model	3 – 12x44	3 – 12x56	4 – 16 x 44	4 – 16 x 50	6 – 24x50
Magnification	3 x – 12 x	3 x – 12 x	4 x – 16 x	4 x – 16 x	6 x – 24 x
Focal Plane	Second	Second	Second	Second	Second
Effective Lens Diameter	27.1 mm – 44 mm	27.7 mm – 56 mm	33.2 mm – 44 mm	34.5 mm – 50 mm	44.9 mm – 50 mm
Exit Pupil Diameter	8.9 mm – 3.7 mm	9.2 mm – 4.7 mm	8.5 mm – 2.8 mm	8.5 mm – 3.1 mm	7.5 mm – 2.1 mm
Twilight Factor	9.0 – 23.0	9.1 – 25.9	11.5 – 26.5	11.7 – 28.3	16.4 – 34.6
Field of View at 100 yds	38 ft – 9.5 ft	38 ft – 9.6 ft	28.5 ft – 7.1 ft	28.5 ft – 7.1 ft	19 ft – 4.8 ft
Angular Field of View, Real	7.24° – 1.81°	7.3° – 1.8°	5.4° – 1.4°	5.43° – 1.36°	3.6° – 0.9°
Diopter Range	- 3 / + 2 dpt				
Eye Relief	3.5 in				
Parallax Setting	100 yds	100 yds	50 yds – ∞	50 yds – ∞	50 yds – ∞
Elevation Adjustment Range	70 MOA	70 MOA	80 MOA	80 MOA	80 MOA
Windage Adjustment Range	70 MOA	70 MOA	60 MOA	60 MOA	60 MOA
Click Value	0.25 MOA				
Main Tube Diameter	30 mm				
Eyeiece Tube Diameter	44 mm				
Objective Tube Diameter	50 mm	62 mm	50 mm	56 mm	56 mm
Coating	LotuTec® / ZEISS T*				
Fogproof	Nitrogen Purged				
Waterproof	400 mbar (submerged 13 ft for 2 hours)				
Operating Temperature	-4 / +131°F				
Length	13.8 in	14.5 in	14 in	14.5 in	14.5 in
Weight	17.9 oz	20.9 oz / 21.8 oz	21.3 oz	23 oz	22.5 oz / 22.5 oz / 23 oz
Reticles	Z-Plex	Z-Plex / #60 illum.	Z-Plex / ZBR-2 / ZMOA-2 / ZMOA-T30	ZMOAi-1	ZBR-1 / ZMOA-1 / ZMOAi-1 / ZMOAi-T20

TECHNICAL SPECIFICATIONS

Victory RF Rangefinder



	RF			
Model	8 × 42	10 × 42	8 × 54	10 × 54
Magnification	8 ×	10 ×	8 ×	10 ×
Effective Lens Diameter	42 mm		54 mm	
Exit Pupil Diameter	5.3 mm	4.2 mm	6.8 mm	5.4 mm
Twilight Factor	18.3	20.5	20.8	23.2
Field of View at 1,000 yds	405 ft	345 ft	360 ft	330 ft
Angular Field of View, Apparent	61° wide angle	63° wide angle	54° wide angle	61° wide angle
Close Focus	8.2 ft		11.5 ft	
Diopter Range	+/- 4 dpt		+/- 4 dpt	
Eye Relief	16 mm		14 mm	
Interpupillary Distance	53.5 – 76 mm		58.5 – 76 mm	
Lens Type	FL			
Prism System	Abbe-König			
Coating	LotuTec® / T*			
Fogproof	Nitrogen Purged			
Waterproof	100 mbar (submerged 3.28 ft for 2 hours)			
Operating Temperature	- 13 / + 145.4° F			
Length	6.54 in		7.68 in	
Width	5.1 in		5.6 in	
Weight	32 oz	33 oz	38 oz	39 oz
Range	11 – 2,500 yds			
Measuring Accuracy	± 1 – 600 / ± 0.5 % > 600 yds			
Measuring Time	< 0.3 Sec.			
Laser Wavelength	905 nm			
Laser Beam Divergence	1.6 × 0.5 mrad			
Battery	1 x 3V / CR2			
Battery life at 68° F	> 2,500 ×			

TECHNICAL SPECIFICATIONS

Victory Binoculars

Model	SF		HT			
	8×42	10×42	8×42	10×42	8×54	10×54
Magnification	8×	10×	8×	10×	8×	10×
Effective Lens Diameter	42 mm		42 mm		54 mm	
Exit Pupil Diameter	5.3 mm	4.2 mm	5.3 mm	4.2 mm	6.7 mm	5.4 mm
Twilight Factor	18.3	20.5	18.3	20.5	20.7	23.2
Field of View at 1,000 yds	444 ft	360 ft	408 ft	330 ft	330 ft	390 ft
Angular Field of View, Apparent	64° wide angle		62°	63°	60°	63°
Close Focus	5 ft		6.2 ft		11.5 ft	
Diopter Range	± 4 dpt		± 4 dpt		± 3 dpt	
Eye Relief	18 mm		16 mm		16 mm	
Interpupillary Distance	55–76 mm		54–76 mm		58–76 mm	
Lens Type	Ultra-FL		FL/HT			
Prism System	Schmidt-Pechan		Abbe-König			
Coating	LotuTec® / ZEISS T*		LotuTec® / ZEISS T*			
Fogproof	Nitrogen Purged		Nitrogen Purged			
Waterproof	400 mbar (submerged 13 ft for 2 hours)		500 mbar (submerged 16.4 ft for 2 hours)		500 mbar (submerged 16.4 ft for 2 hours)	
Operating Temperature	-22 / +140 °F		-22 / +145 °F			
Height	6.8 in		6.3 in		7.6 in	
Width	4.9 in		5 in		5.6 in	
Weight	27.5 oz		29.2 oz	30 oz	36.5 oz	37 oz



TECHNICAL SPECIFICATIONS

Conquest Binoculars

Model	Pocket		FL	
	8×25	10×25	8×32	10×32
Magnification	8×	10×	8×	10×
Effective Lens Diameter	25 mm		32 mm	
Exit Pupil Diameter	3.1 mm	2.5 mm	4 mm	3.2 mm
Twilight Factor	14.1	15.8	16	17.9
Field of View at 1,000 yds	390 ft	315 ft	420 ft	360 ft
Angular Field of View, Apparent	60°		64° wide angle	69° wide angle
Close Focus	6.2 ft		6.56 ft	
Diopter Range	± 3 dpt		± 4 dpt.	
Eye Relief	16.5 mm		15.5 mm	15.2 mm
Interpupillary Distance	37-74 mm		52 – 74 mm	
Lens Type	FL		FL-Type (4 Lenses)	
Prism System	Schmidt-Pechan		Schmidt-Pechan	
Coating	LotuTec® / ZEISS T*		LotuTec® / ZEISS T*	
Fogproof	Nitrogen Purged		Nitrogen Purged	
Waterproof	100 mbar (submerged 3.28 ft for 2 hours)		400 mbar (submerged 13 ft for 2 hours)	
Operating Temperature	-13 / +145 °F		-22 / +145 °F	
Height	4.4 in		4.61 in	
Width	3.9 in		4.57 in	
Weight	10.2 oz		19.75 oz	

Model	HD						
	8×32	10×32	8×42	10×42	8×56	10×56	15×56
Magnification	8×	10×	8×	10×	8×	10×	15×
Effective Lens Diameter	32 mm	32 mm	42 mm	42 mm	56 mm	56 mm	56 mm
Exit Pupil Diameter	4 mm	3.2 mm	5.25 mm	4.2 mm	7 mm	5.6 mm	3.7 mm
Twilight Factor	16	17.9	18.3	20.5	21.2	23.7	29.0
Field of View at 1,000 yds	420 ft	354 ft	384 ft	345 ft	375 ft	345 ft	240 ft
Angular Field of View, Apparent	64° wide angle	68° wide angle	59°	66° wide angle	57°	66° wide angle	69° wide angle
Close Focus	4.9 ft		6.5 ft		11.5 ft		
Diopter Range	± 4 dpt		± 4 dpt		± 4 dpt		
Eye Relief	16 mm		18 mm		18 mm		
Interpupillary Distance	54–74 mm		54–74 mm		54–74 mm		
Lens Type	HD		HD		HD		
Prism System	Schmidt-Pechan		Schmidt-Pechan		Abbe-König		
Coating	LotuTec® / ZEISS T*		LotuTec® / ZEISS T*		LotuTec® / ZEISS T*		
Fogproof	Nitrogen Purged		Nitrogen Purged		Nitrogen Purged		
Waterproof	400 mbar (submerged 13 ft for 2 hours)		400 mbar (submerged 13 ft for 2 hours)		400 mbar (submerged 13 ft for 2 hours)		
Operating Temperature	-21 / +141 °F		-21 / +141 °F		-4 / +145 °F		
Height	4.9 in		6.5 in		8.27 in		
Width	4.5 in		4.7 in		5.7 in		
Weight	22.2 oz		28 oz		44.6 oz	45 oz	45.7 oz

TECHNICAL SPECIFICATIONS

Terra Binoculars

Model	Pocket		ED			
	8×25	10×25	8×32	10×32	8×42	10×42
Magnification	8×	10×	8×	10×	8×	10×
Effective Lens Diameter	25 mm		32 mm		42 mm	
Exit Pupil Diameter	3.1 mm	2.5 mm	4.0 mm	3.2 mm	5.3 mm	4.2 mm
Twilight Factor	14.1	15.8	16.0	17.9	18.3	20.5
Field of View at 1,000 yds	357 ft	291 ft	442 ft	367 ft	375 ft	330 ft
Angular Field of View, Apparent	52°	54°	61°	61°	56°	60°
Close Focus	5.7 ft		5.25 ft		5.25 ft	
Diopter Range	± 3 dpt		± 3 dpt		± 3 dpt	
Eye Relief	16 mm		16.5 mm		18 mm	15 mm
Interpupillary Distance	35–72 mm		56–74 mm		58–75.5 mm	
Lens Type	ED		ED		ED	
Prism System	Schmidt-Pechan		Schmidt-Pechan		Schmidt-Pechan	
Coating	Hydrophobic ZEISS MC		Hydrophobic ZEISS MC		Hydrophobic ZEISS MC	
Fogproof	Nitrogen Purged		Nitrogen Purged		Nitrogen Purged	
Waterproof	100 mbar (submerged 3.28 ft for 2 hours)		100 mbar (submerged 3.28 ft for 2 hours)		100 mbar (submerged 3.28 ft for 2 hours)	
Operating Temperature	-4 / +145 °F		+5 / +140 °F		+5 / +140 °F	
Height	4.4 in		4.9 in		5.5 in	
Width	4.5 in		4.61 in		4.7 in	
Weight	10.9 oz		17.98 oz		24.5 oz	

TECHNICAL SPECIFICATIONS

Spotting Scopes

Model	Victory Harpia	
	85	95
Focal Length	162 mm – 486 mm	174 mm – 523 mm
Effective Lens Diameter	85 mm	95 mm
Filter Thread Objective Lens Side	M86 × 1	M95 × 1
Close Focus	3.8 yds	4.9 yds
Height × Width × Length	4.8 x 4.1 x 15.1 in	4.9 x 4.3 x 16.1 in
Weight (Without Eyepiece)	68.2 oz	73.3 oz
Waterproof	400 mbar (submerged 13 ft for 2 hours)	
Fogproof	Nitrogen Purged	

Model	Victory Harpia Eyepiece	
	22 – 65 ×	23 – 70 ×
Focal Length	7.48 mm	
Field of View at 1,000 yds	189.6 – 63.0	176.4 – 58.5
Zoom Factor	3 ×	
Exit Pupil	2.50 – 1.31 mm	2.50 – 1.34 mm
Diameter	Ø 2.1 in	
Length	2.8 in	
Weight	7.8 oz	

Model	Conquest Gavia 85	Dialyt
	85	18–45 × 65
Magnification	30–60×	18–45 ×
Effective Lens Diameter	85 mm	65 mm
Exit Pupil Diameter	2.8 mm – 1.4 mm	3.6 mm - 1.4 mm
Focal Length	494 mm	–
Field of View at 1,000 yds	99 ft – 69 ft	120 ft - 69 ft
Close Focus	10.8 ft	32.8 ft
Lens Type	HD	Achromat (5-lens)
Coating	LotuTec®	LotuTec®
Fogproof	Nitrogen Purged	Nitrogen Purged
Waterproof	400 mbar (submerged 13 ft for 2 hours)	
Lens Thread	M86 × 1	–
Length	15.6 in	15.5 in
Weight (Incl. Eyepiece)	60 oz	42.15 oz

TECHNICAL SPECIFICATIONS

Monoculars

Model	Monoculars					
	3×12	4×12	6×18	8×20	10×25	MiniQuick® 5×10
Magnification	3 ×	4 ×	6 ×	8 ×	10 ×	5 ×
Effective Lens Diameter	12 mm		18 mm	20 mm	25 mm	10 mm
Exit Pupil Diameter	4 mm	3 mm		2.5 mm		2 mm
Twilight Factor	6	6.9	10.4	12.6	15.8	7
Field of View at 1,000 yds	660 ft	540 ft	360 ft	330 ft	264 ft	300 ft
Angular Field of View, Apparent	38°	41°		51°		29°
Close Focus	0.66 ft	1.48 ft	0.98 ft	9.84 ft	14.78 ft	13.12 ft
Diopter Range	± 4 dpt					
Eye Relief	12 mm	15 mm				16.5 mm
Lens Type	Achromat					
Prism System	Schmidt-Pechan					–
Coating	ZEISS T*					
Waterproof	Splash-Proof					
Operating Temperature	-4° / +105 °F					
Height	1.89 in	2.4 in	3.35 in	3.66 in	4.29 in	4.45 in
Weight	1.9 oz	1.58 oz	2.05 oz	2.72 oz	3.1 oz	0.81 oz

All with ZEISS T* multi-layer coating.

TECHNICAL SPECIFICATIONS

Binocular with Image Stabilization

Model	Binoculars With Image Stabilization
	20×60 S
Magnification	20 ×
Effective Lens Diameter	60 mm
Exit Pupil Diameter	3 mm
Twilight Factor	34.6
Field of View at 1,000 yds	WA 156 ft
Angular Field of View, Apparent	60°
Close Focus	45.9 ft
Diopter Range	± 4 dpt
Eye Relief	13 mm
Interpupillary Distance	57-73 mm
Lens Type	Achromat
Prism System	Porro
Coating	ZEISS T*
Waterproof	Splash-Proof
Operating Temperature	-4° / +104 °F
Height x Width	6.33 × 10.8 in
Weight	58.55 oz

Delivery incl. neoprene carrying strap, eyepiece cover and aluminum case.



PRODUCT DESCRIPTIONS AND ORDER NUMBERS

ZEISS Product List

VICTORY V8



36 mm Main Tube - Matte Black - Second Focal Plane - Digital Illumination - Capped Windage Turret - .33 MOA - SCHOTT FL Glass - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating

PRODUCT DESCRIPTION	ORDER NUMBER
VICTORY V8 1-8x30 Plex Reticle (#60) - Capped Turrets - Rail Mount - Fixed Parallax	522108 9960
VICTORY V8 1-8x30 Plex Reticle (#60) - Capped Turrets - Fixed Parallax	522109 9960
VICTORY V8 1.8-14x50 Plex Reticle (#60) - Capped Turrets - Parallax Adj.	522119 9960
VICTORY V8 1.8-14x50 Plex Reticle (#60) - External Elevation Turret, w/BDC (ASV) and Inserts - Rail Mount - Parallax Adj.	522118 9960 040
VICTORY V8 1.8-14x50 Plex Reticle (#60) - External Elevation Turret, w/BDC (ASV) and Inserts - Parallax Adj.	522119 9960 040
VICTORY V8 2.8-20x56 Plex Reticle (#60) - External Elevation Turret, w/BDC (ASV) and Inserts - Rail Mount - Parallax Adj.	522138 9960 040
VICTORY V8 2.8-20x56 Plex Reticle (#60) - External Elevation Turret, w/BDC (ASV) and Inserts - Parallax Adj.	522139 9960 040
VICTORY V8 4.8-35x60 Mil-Dot Reticle (#43) - External Elevation Turret, w/BDC (ASV) and Inserts - Parallax Adj. - .167 MOA	522149 9943 040
VICTORY V8 4.8-35x60 Plex Reticle (#60) - External Elevation Turret, w/BDC (ASV) and Inserts - Parallax Adj. - .167 MOA	522149 9960 040

CONQUEST V6



30 mm Main Tube - Matte Black - Second Focal Plane - SCHOTT FL Glass - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating

CONQUEST V6 1-6x24 Plex Dig. Illum. Reticle (#60) - Capped Turrets - .5 MOA - Fixed Parallax - Single Turn	522215-9960-000
CONQUEST V6 1-6x24 ZMOA-4 Dig. Illum. Reticle (#95) - External Elevation Turret, Locking - Ballistic Stop - Capped Windage Turret - .5 MOA - Fixed Parallax	522215-9995-070
CONQUEST V6 3-18x50 Plex Reticle (#6) - Capped Turrets - .25 MOA - Parallax Adj.	522241-9906-000
CONQUEST V6 3-18x50 Plex Reticle (#6) - External Turrets - Ballistic Stop - .25 MOA - Parallax Adj.	522241-9906-070
CONQUEST V6 3-18x50 ZBR-2 Reticle (#92) - External Turrets - Ballistic Stop - .25 MOA - Parallax Adj.	522241-9992-070
CONQUEST V6 3-18x50 ZMOA-2 Reticle (#94) - External Turrets - Ballistic Stop - .25 MOA - Parallax Adj.	522241-9994-070
CONQUEST V6 5-30x50 Plex Reticle (#6) - External Turrets - Ballistic Stop - .25 MOA - Parallax Adj.	522251-9906-070
CONQUEST V6 5-30x50 ZBR-1 Reticle (#91) - External Turrets - Ballistic Stop - .25 MOA - Parallax Adj.	522251-9991-070
CONQUEST V6 5-30x50 ZMOA-1 Reticle (#93) - External Turrets - Ballistic Stop - .25 MOA - Parallax Adj.	522251-9993-070

CONQUEST V4



30 mm Main Tube - Matte Black - Second Focal Plane - Capped Windage Turret - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating

CONQUEST V4 3-12x44 Z-Plex Reticle (#20) - Capped Elevation Turret - .25 MOA - Fixed Parallax	522961-9920-000
CONQUEST V4 3-12x56 Z-Plex Reticle (#20) - Capped Elevation Turret - .25 MOA - Fixed Parallax	522921 9920 000
CONQUEST V4 3-12x56 Plex Illum. Reticle (#60) - Capped Elevation Turret - .25 MOA - Fixed Parallax	522925-9960-000
CONQUEST V4 4-16x44 Z-Plex Reticle (#20) - External Elevation Turret - Ballistic Stop - .25 MOA - Parallax Adj.	522931 9920 080
CONQUEST V4 4-16x44 ZBR-2 Reticle (#92) - External Elevation Turret - Ballistic Stop - .25 MOA - Parallax Adj.	522931 9992 080
CONQUEST V4 4-16x44 ZMOA-T30 (#64) - External Elevation Turret - Ballistic Stop - .25 MOA - Parallax Adj.	522931-9964-080
CONQUEST V4 4-16x44 ZMOA-2 Reticle (#94) - External Elevation Turret - Ballistic Stop - .25 MOA - Parallax Adj.	522931 9994 080
CONQUEST V4 4-16x50 ZMOAi-1 Illum. Reticle (#93) - Ext. Elevation Turret - Ballistic Stop - .25 MOA - Parallax Adj.	522945-9993-080
CONQUEST V4 6-24x50 ZMOAi-T20 Illum. (#65) - External Elevation Turret - Ballistic Stop - .25 MOA - Parallax Adj.	522955-9965-080
CONQUEST V4 6-24x50 ZBR-1 Reticle (#91) - External Elevation Turret - Ballistic Stop - .25 MOA - Parallax Adj.	522951 9991 080
CONQUEST V4 6-24x50 ZMOA-1 Reticle (#93) - External Elevation Turret - Ballistic Stop - .25 MOA - Parallax Adj.	522951 9993 080
CONQUEST V4 6-24x50 ZMOA-1 Illum. Reticle (#93) - External Elevation Turret - Ballistic Stop - .25 MOA - Parallax Adj.	522955 9993 080

VICTORY RF Rangefinder

11 - 2,500 Yards - Bluetooth™ enabled - Angle Compensation - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating - Adjustable Red LED Display - Compact Design



VICTORY RF 8x42	52 45 48
VICTORY RF 10x42	52 45 49
VICTORY RF 8x54	52 56 48
VICTORY RF 10x54	52 56 49

VICTORY SF

Ultra-FL Lens System - SCHOTT Glass - ErgoBalance System - SmartFocus - 27.5 oz - Leading FOV: 360/444 ft @ 1,000 yds - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating



VICTORY SF 8x42 (black)	52 42 23
VICTORY SF 10x42 (black)	52 42 24

VICTORY HT

95% Light Transmission - SCHOTT HT/FL Glass - ComfortFocus - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating



VICTORY HT 8x54	52 56 28
VICTORY HT 10x54	52 56 29

VICTORY FL

FL Glass - 19.75 oz - FOV: 360/420 ft @ 1,000 yds - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating



VICTORY FL 8x32	52 32 30
VICTORY FL 10x32	52 32 31

VICTORY POCKET

Exceptionally Compact - 10.2 oz - FOV: 390/315 ft @ 1,000 yds - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating



VICTORY Pocket 8x25	522038 9901
VICTORY Pocket 10x25	522039 9901

CONQUEST HD

HD Lens System - Dielectric Prism Coatings - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating



CONQUEST HD 8x32	52 32 11
CONQUEST HD 10x32	52 32 12
CONQUEST HD 8x42	52 42 11
CONQUEST HD 10x42	52 42 12
CONQUEST HD 8x56	52 56 31
CONQUEST HD 10x56	52 56 32
CONQUEST HD 15x56	52 56 33

TERRA ED

SCHOTT ED Glass - ZEISS MC Hydrophobic Multi-Layer Coating



TERRA ED 8x32 - Black	523203 9901
TERRA ED 8x32 - Gray	523203 9907
TERRA ED 10x32 - Black	523204 9901
TERRA ED 10x32 - Gray	523204 9907
TERRA ED 8x42 - Black	524203 9901
TERRA ED 8x42 - Gray	524203 9907
TERRA ED 8x42 - Green	524203 9908
TERRA ED 10x42 - Black	524204 9901
TERRA ED 10x42 - Gray	524204 9907
TERRA ED 10x42 - Green	524204 9908

TERRA ED POCKET

SCHOTT ED Glass - 10.9 oz - FOV: 291/357 ft @ 1,000 yds - ZEISS MC Hydrophobic Multi-Layer Coating



TERRA ED Pocket 8x25 black	522502 9901
TERRA ED Pocket 8x25	522502 9907
TERRA ED Pocket 10x25 black	522503 9901
TERRA ED Pocket 10x25	522503 9907

Image Stabilization Binocular

Mechanical Image Stabilization - T* Six-Layer Transmission Coating



20x60 S Image Stabilizing Binocular	52 60 00
-------------------------------------	----------

VICTORY HARPIA 85/95

3x Wide-Angle Objective Zoom - FOV: Constant 72° - Dual-Speed Focus - FL/HT Glass - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating



VICTORY Harpia 85 mm Obj. Body	52 80 47
VICTORY Harpia 95 mm Obj. Body	52 80 57
VICTORY Harpia Vario Eyepiece (22-65x w/85 mm Obj.; 23-70x w/90 mm Obj.)	52 80 70

CONQUEST GAVIA 85

HD Lens System - Built-in 30-60x Eyepiece - 60 oz - FOV: 99-69 ft @ 1,000 yds - T* Six-Layer Transmission Coating - LotuTec Hydrophobic Coating



CONQUEST Gavia 85 (Including Eyepiece 30-60x)	52 80 48
---	----------

DIALYT

Compact Field Spotter - Monobloc Construction - 5 Piece Achromat - 42.15 oz - FOV: 120-69 ft @1,000 yds - ZEISS MC Multi-Layer Coating



DIALYT 18-45x65 Field Spotter	52 80 07
-------------------------------	----------

MONOCULARS

Lightweight - Compact - Splashproof - T* Six-Layer Transmission Coating



MONOCULAR 3x12	52 20 12
MONOCULAR 4x12	52 20 50
MONOCULAR 6x18	52 20 51
MONOCULAR 8x20	52 20 52
MONOCULAR 10x25	52 20 53
MONOCULAR 5x10 Miniquick	52 20 10

We've got your back!

Limited Lifetime Transferable Warranty

for USA and Canada

("Limited Warranty")

Your ZEISS Sports Optics Optical System is warranted against defects in workmanship and materials for the life of the Product, subject to limitations below. The Optical System means (a) all the components between and inclusive of the optic's objective and ocular lens, and (b) any functional and mechanical operating system associated with the optical performance of the Optical System.

Limited Warranty Conditions for Electronic Components:

Electronic components are warranted against defects in workmanship and materials for 5 years from the original date of manufacture or purchase.

Limited Warranty Conditions for Non-Optical System Components and Accessories:

"Non-optical system components and accessories, such as carrying straps, lens caps, rubber armoring, turret caps and other similar parts are warranted against defects in workmanship and materials for 1 year from the date of manufacture or purchase. If a defect that is covered by this Warranty is found, ZEISS will, at its option, either repair or replace the Product with a new or reconditioned ZEISS product of comparable specifications."

How to Submit a Warranty Claim:

Warranty claims can be initiated on-line by completing the [Product Repair Form](#), or by calling ZEISS Sports Optics Customer Service at 1-800-441-3005.

Warranty Disclaimers and Exclusions:

"This is the exclusive Warranty for the Products. All other warranties, expressed or implied, statutory or otherwise, including, without restriction, those of merchantability or of fitness for use, are excluded. Some States do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. This warranty only covers products purchased within the USA or Canada from an Authorized ZEISS Sports Optics Dealer. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State."

Conditions not covered under this warranty:

- Accidental damage.
- Normal wear and tear.
- Damage caused by natural disasters, acts of terrorism and combat conditions.
- Damage determined to have been caused by unauthorized modification, misuse, abuse, neglect, or improper lens care www.zeiss.com/us/lenscare.
- Loss or theft.

LIMITATION OF LIABILITY

THE REMEDIES DESCRIBED ABOVE ARE YOUR SOLE AND EXCLUSIVE REMEDIES AND ZEISS' ENTIRE LIABILITY FOR ANY BREACH OF THIS LIMITED WARRANTY. ZEISS WILL NOT BE LIABLE UNDER ANY CIRCUMSTANCES FOR AN AMOUNT EXCEEDING THE ACTUAL AMOUNT PAID BY YOU FOR THE DEFECTIVE PRODUCT, NOR WILL ZEISS UNDER ANY CIRCUMSTANCES BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, SPECIAL OR PUNITIVE DAMAGES OR LOSSES, WHETHER DIRECT OR INDIRECT. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

ZEISS Sports Optics 5-Year No Fault Policy

for USA and Canada

Every product we make is backed by an industry leading, limited lifetime, transferable warranty (www.zeiss.com/us/warranty).

In addition to this warranty, ZEISS offers a 5-Year No-Fault Policy on select Victory and Conquest products. During the first five years of original ownership, ZEISS will, at its discretion, repair or replace your product if it is accidentally damaged during normal and intended use.

This policy may be used once per product. If a "No-Fault" claim for a product has been settled, the policy for that product expires. However, the product remains covered under our Limited Lifetime Transferable Warranty.

The 5 Year No-Fault Policy is subject to the following terms and conditions:

- The original owner must register the product online within 60 days of purchase (www.zeiss.com/us/productregistration).
- This policy is an extended benefit and not a "warranty."
- This policy applies to select Victory and Conquest products only.
- This policy is only valid for residents of the United States and Canada.
- Products covered by this policy must be purchased from an Authorized ZEISS Dealer, located within the USA or Canada.
- The policy is only available to the original owner of the product and is not transferable.
- If damage is covered by this Policy, ZEISS will, at its option, subject to availability and without charge, either repair or replace the Product with a new or reconditioned ZEISS product of comparable specifications.
- The owner is responsible for shipping the product to ZEISS.
- ZEISS will cover the cost to ship the repaired or replaced product back to the owner via standard ground delivery.
- Claims can be initiated online [Product Repair Form](#), or by calling ZEISS Sports Optics Customer Service at 1-800-441-3005.

Conditions not covered under this policy include:

- Normal wear and tear.
- Superficial lens scratches that do not noticeably affect the product's performance.
- Damage determined to have been caused by unauthorized modification, misuse, abuse, or improper lens care www.zeiss.com/us/lenscare.
- Loss or theft.

Select product list covered under the 5-Year No Fault Policy

Binoculars:

Victory SF
Victory RF
Victory HT
Victory FL
Victory Pocket
Conquest HD

Riflescopes:

Victory HT
Victory V8
Conquest V6
Conquest V4
Conquest HD5
Conquest DL

Spotting Scopes:

Victory Harpia
Conquest Gavia

Join the **ZEISS Hunting Community.**

Follow us online:



facebook.com/ZEISSHuntingUS



youtube.com/user/zeissportsoptics



[@ZEISSHunting](https://instagram.com/ZEISSHunting)

Customer Service

1-800-441-3005

info.sportoptics.us@zeiss.com

Carl Zeiss SBE, LLC

Sports Optics Division

zeiss.com/us/sportoptics



Seeing beyond

Carl Zeiss SBE, LLC is not responsible for typographical errors, and we make every effort to ensure the accuracy of the information at time of printing. Products and specifications are subject to change without notice. Please visit zeiss.com/us/sports-optics for the most up-to-date product information.

US_2209-273 Printed in USA 01/2020